

CLIENT

PROJECT

NOTES

BL SERIES

LED BOLLARD

The BL Series is a stylish, energy-efficient, and durable lighting solution. Featuring a sturdy die-cast housing, combined with a corrosion-resistant powder coated finish, and a long-lasting LED to provide years of maintenance-free service.

- 360° of surround illumination
- Polycarbonate lens
- CCT and power adjustable
- UL, DLC® (Pending)



TECHNICAL DETAILS




POWER	10W / 14W / 19W / 24W
COLOR TEMPERATURE	3000K / 4000K / 5000K
CRI	80+ CRI
VOLTAGE	120-277VAC
EFFICIENCY	Up to 150lm/w
DIMMING	0-10V
LUMENS	Up to 3,200lm
HOUSING	Die-Cast Aluminum
MOUNTING	Included Anchor Bolts
OPERATING TEMPERATURE	-40°F to 113°F
WARRANTY	5 Years
FINISH	Dark Bronze, Black, White
LOCATION	Wet
CERTIFICATIONS	UL, DLC® Pending

LUMENS 4000K

10W	14W	19W	24W
1,500lm	2,000lm	2,600lm	3,200lm

L70: 50,000+ HOURS

DIMENSIONS

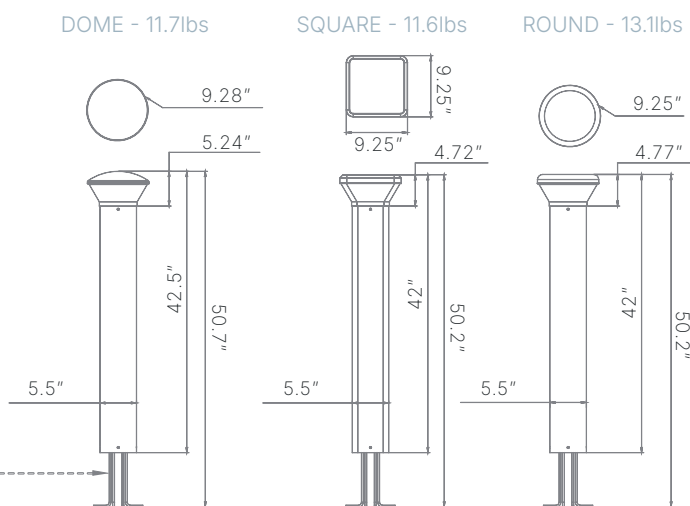

BL SERIES

LED BOLLARD

VALRIYA
SPEC GRADE COMMERCIAL LED LIGHTING

ORDERING GUIDE

Example: VA-BL-LV24-ADJ-F-R-RD-D

VA-BL	LV VOLTAGE [LV] 120-277VAC	24 POWER [24] 10W / 14W / 19W / 24W	ADJ CCT [ADJ] Adjustable CCT 3000K / 4000K / 5000K	DIFFUSER [F] Frosted [C] Clear	TOP [R] Round [S] Square [D] Dome
	DISTRIBUTION [TR] Traditional [GR] Grill	FINISH [D] Dark Bronze [B] Black [W] White [SG] Silver / Grey	OPTIONS [B] Emergency Battery		

ADDITIONAL MOUNTING*

SKU	DESCRIPTION
VA-BL-BBK	Bollard Base Kit

*Items must be ordered separately

ADDITIONAL MOUNTING



VA-BL-BBK

DIFFUSERS



ROUND CLEAR



ROUND FROSTED



SQUARE CLEAR



SQUARE FROSTED

TOPS



DOME



ROUND



SQUARE

DISTRIBUTIONS



GRILL



TRADITIONAL

BL SERIES

LED BOLLARD

VALRIYA
SPEC GRADE COMMERCIAL LED LIGHTING

SKU	WATTS	SETTING	CCT	LUMENS	CRI	VOLTAGE¹	DLC	QUICK SHIP
VA-BL-LV24-ADJ	10W	40%	3000K	1,400	80+	120-277VAC	Pending	No
VA-BL-LV24-ADJ	14W	60%	3000K	1,900	80+	120-277VAC	Pending	No
VA-BL-LV24-ADJ	19W	80%	3000K	2,500	80+	120-277VAC	Pending	No
VA-BL-LV24-ADJ	24W	100%	3000K	3,000	80+	120-277VAC	Pending	No
VA-BL-LV24-ADJ	10W	40%	4000K	1,500	80+	120-277VAC	Pending	No
VA-BL-LV24-ADJ	14W	60%	4000K	2,000	80+	120-277VAC	Pending	No
VA-BL-LV24-ADJ	19W	80%	4000K	2,600	80+	120-277VAC	Pending	No
VA-BL-LV24-ADJ	24W	100%	4000K	3,200	80+	120-277VAC	Pending	No
VA-BL-LV24-ADJ	10W	40%	5000K	1,450	80+	120-277VAC	Pending	No
VA-BL-LV24-ADJ	14W	60%	5000K	1,950	80+	120-277VAC	Pending	No
VA-BL-LV24-ADJ	19W	80%	5000K	2,550	80+	120-277VAC	Pending	No
VA-BL-LV24-ADJ	24W	100%	5000K	3,100	80+	120-277VAC	Pending	No

PHOTOMETRICS 24W / 4000K / Square / Frosted

