

CLIENT

PROJECT

NOTES

BLA SERIES

LED BOLLARD

The BLA Series is a stylish, energy-efficient, and durable lighting solution. Featuring a sturdy die-cast housing, combined with a corrosion-resistant powder coated finish, and a long-lasting LED to provide years of maintenance-free service.

- 360° of surround illumination
- Polycarbonate lens
- CCT and power adjustable
- UL, TAA



TECHNICAL DETAILS

POWER	10W / 14W / 19W / 24W
COLOR TEMPERATURE	3000K / 4000K / 5000K
CRI	80+ CRI
VOLTAGE	120-277VAC
EFFICIENCY	Up to 150lm/w
DIMMING	0-10V
LUMENS	Up to 3,200lm
TOP STYLES	Round, Square, Dome
HOUSING	Die-Cast Aluminum
MOUNTING	Included Anchor Bolts
OPERATING TEMPERATURE	-40°F to 113°F
WARRANTY	5 Years
FINISH	Dark Bronze, Black, White
LOCATION	Wet
CERTIFICATIONS	UL, TAA

LUMENS 4000K

10W	14W	19W	24W
1,500lm	2,000lm	2,600lm	3,200lm




L70: 50,000+ HOURS

DIMENSIONS

DOME - 11.7lbs

SQUARE - 11.6lbs

ROUND - 13.1lbs

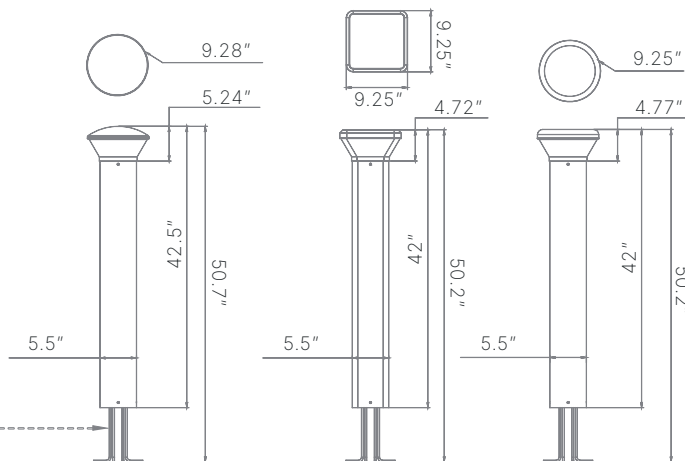

BLA SERIES

LED BOLLARD

ORDERING GUIDE

Example: VA-BLA-LV24-ADJ-FRTR-D

VA-BLA	LV VOLTAGE [LV] 120-277VAC	24 POWER [24] 10W / 14W / 19W / 24W	ADJ CCT [ADJ] Adjustable CCT 3000K / 4000K / 5000K	DIFFUSER [F] Frosted [C] Clear	TOP [R] Round [S] Square [D] Dome
	DISTRIBUTION [TR] Traditional [GR] Grill	FINISH [D] Dark Bronze [B] Black [W] White [SG] Silver / Grey	OPTIONS [E] Emergency Battery		

ADDITIONAL MOUNTING*

SKU	DESCRIPTION
VA-BLA-BBK	Bollard Base Kit

*Items must be ordered separately

ADDITIONAL MOUNTING



VA-BL-BBK

DIFFUSERS



ROUND CLEAR



ROUND FROSTED



SQUARE CLEAR



SQUARE FROSTED

TOPS



DOME



ROUND



SQUARE

DISTRIBUTIONS



GRILL



TRADITIONAL

BLA SERIES

LED BOLLARD

VALRIYA
SPEC GRADE COMMERCIAL LED LIGHTING

SKU	WATTS	SETTING	DIFFUSER	DISTRIBUTION	CCT	LUMENS	CRI	VOLTAGE¹	QUICK SHIP
VA-BLA-LV24-ADJ-FXTR-X	10W	40%	Frosted	Traditional	3000K	1,400	80+	120-277VAC	Yes
VA-BLA-LV24-ADJ-FXTR-X	14W	60%	Frosted	Traditional	3000K	1,900	80+	120-277VAC	Yes
VA-BLA-LV24-ADJ-FXTR-X	19W	80%	Frosted	Traditional	3000K	2,500	80+	120-277VAC	Yes
VA-BLA-LV24-ADJ-FXTR-X	24W	100%	Frosted	Traditional	3000K	3,000	80+	120-277VAC	Yes
VA-BLA-LV24-ADJ-FXTR-X	10W	40%	Frosted	Traditional	4000K	1,500	80+	120-277VAC	Yes
VA-BLA-LV24-ADJ-FXTR-X	14W	60%	Frosted	Traditional	4000K	2,000	80+	120-277VAC	Yes
VA-BLA-LV24-ADJ-FXTR-X	19W	80%	Frosted	Traditional	4000K	2,600	80+	120-277VAC	Yes
VA-BLA-LV24-ADJ-FXTR-X	24W	100%	Frosted	Traditional	4000K	3,200	80+	120-277VAC	Yes
VA-BLA-LV24-ADJ-FXTR-X	10W	40%	Frosted	Traditional	5000K	1,450	80+	120-277VAC	Yes
VA-BLA-LV24-ADJ-FXTR-X	14W	60%	Frosted	Traditional	5000K	1,950	80+	120-277VAC	Yes
VA-BLA-LV24-ADJ-FXTR-X	19W	80%	Frosted	Traditional	5000K	2,550	80+	120-277VAC	Yes
VA-BLA-LV24-ADJ-FXTR-X	24W	100%	Frosted	Traditional	5000K	3,100	80+	120-277VAC	Yes
VA-BLA-LV24-ADJ-CXGR-X	10W	40%	Clear	Grill	3000K	1,400	80+	120-277VAC	No
VA-BLA-LV24-ADJ-CXGR-X	14W	60%	Clear	Grill	3000K	1,900	80+	120-277VAC	No
VA-BLA-LV24-ADJ-CXGR-X	19W	80%	Clear	Grill	3000K	2,500	80+	120-277VAC	No
VA-BLA-LV24-ADJ-CXGR-X	24W	100%	Clear	Grill	3000K	3,000	80+	120-277VAC	No
VA-BLA-LV24-ADJ-CXGR-X	10W	40%	Clear	Grill	4000K	1,500	80+	120-277VAC	No
VA-BLA-LV24-ADJ-CXGR-X	14W	60%	Clear	Grill	4000K	2,000	80+	120-277VAC	No
VA-BLA-LV24-ADJ-CXGR-X	19W	80%	Clear	Grill	4000K	2,600	80+	120-277VAC	No
VA-BLA-LV24-ADJ-CXGR-X	24W	100%	Clear	Grill	4000K	3,200	80+	120-277VAC	No
VA-BLA-LV24-ADJ-CXGR-X	10W	40%	Clear	Grill	5000K	1,450	80+	120-277VAC	No
VA-BLA-LV24-ADJ-CXGR-X	14W	60%	Clear	Grill	5000K	1,950	80+	120-277VAC	No
VA-BLA-LV24-ADJ-CXGR-X	19W	80%	Clear	Grill	5000K	2,550	80+	120-277VAC	No
VA-BLA-LV24-ADJ-CXGR-X	24W	100%	Clear	Grill	5000K	3,100	80+	120-277VAC	No

PHOTOMETRICS 24W / 4000K / Square / Frosted

