

CLIENT

PROJECT

NOTES

BPLA SERIES

ADJUSTABLE BACKLIT PANEL

The BPLA Series features a back-lit technology for compact size and light uniformity. The BPLA comes standard with an adjustable color temperature, power output, and three different size options to choose from.

- 5 Wattage & CCT adjustable
- Optional factory EM driver install available
- Comes standard with external junction box
- Available in 1'x4', 2'x2', and 2'x4' sizing
- ETL, TAA, IC Rated



TECHNICAL DETAILS

POWER 1'X4'	20W / 25W / 30W / 35W / 40W
POWER 2'X2'	20W / 25W / 30W / 35W / 40W
POWER 2'X4'	25W / 30W / 40W / 45W / 50W
COLOR TEMPERATURE	30K / 35K / 40K / 50K / 65K
CRI	80+ CRI
VOLTAGE	120-277VAC
EFFICIENCY	Up to 125lm/w
DIMMING	0-10V
HOUSING	Aluminum
MOUNTING	Recessed, Hanging, Surface
OPERATING TEMPERATURE	-4°F to 122°F
WARRANTY	5 Years
FINISH	White
LOCATION	Damp
CERTIFICATIONS	ETL, TAA, IC Rated

LUMENS 5000K

1'X4'	20W	25W	30W	35W	40W
	2,500lm	3,125lm	3,750lm	4,375lm	5,000lm
2'X2'	20W	25W	30W	35W	40W
	2,500lm	3,125lm	3,750lm	4,375lm	5,000lm
2'X4'	25W	30W	40W	45W	50W
	3,125lm	3,750lm	5,000lm	5,625lm	6,250lm

L70: 50,000+ HOURS





DIMENSIONS

External Box

1'X4' - 3.8lbs

2'X2' - 3.8lbs

2'X4' - 7.6lbs

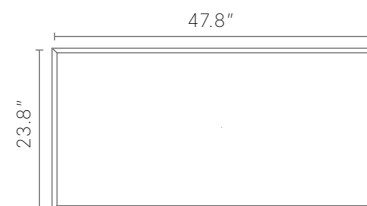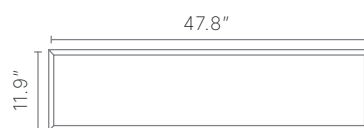

BPLA SERIES

ADJUSTABLE BACKLIT PANEL

VALRIYA
SPEC GRADE COMMERCIAL LED LIGHTING

ORDERING GUIDE

Example: VA-BPLA-LV24

VA-BPLA	LV		
	VOLTAGE	SIZE / POWER	OPTIONS
	[LV] 120-277VAC	[14] 1'x4' 20W / 25W / 30W / 35W / 40W	[E] 8W EM Driver, CEC Listed ¹
		[22] 2'x2' 20W / 25W / 30W / 35W / 40W	
		[24] 2'x4' 25W / 30W / 40W / 45W / 50W	

¹ Consult factory for other EM options

ACCESSORIES*

SKU	DESCRIPTION
VA-SMK-14	1'x4' Surface Mount Kit
VA-SMK-22	2'x2' Surface Mount Kit
VA-SMK-24	2'x4' Surface Mount Kit
VA-DWK-14	1'x4' Drywall Flange Kit
VA-DWK-22	2'x2' Drywall Flange Kit
VA-DWK-24	2'x4' Drywall Flange Kit
VA-PSK-2	2'x2' Suspension Kit (4ft length)
VA-PSK-4	1'x4' or 2'x4' Suspension Kit (4ft length)
VA-EDD-LI08-058	8W EM Driver, CEC Listed

*Items must be ordered separately



PHOTOMETRICS 40W / 5000K

