

CLIENT

PROJECT

NOTES

BPLA1 SERIES

CONTRACTOR GRADE PANEL



The BPLA1 Series features a back-lit technology for compact size and light uniformity. The BPLA1 comes standard with an adjustable color temperature, power output, and three different size options to choose from.



- 5 Wattage & CCT adjustable
- Optional factory EM driver install available
- Available in 1'x4', 2'x2', and 2'x4' sizing
- ETL, IC Rated

TECHNICAL DETAILS


POWER 1'X4'	20W / 25W / 30W / 35W / 40W
POWER 2'X2'	20W / 25W / 30W / 35W / 40W
POWER 2'X4'	20W / 25W / 30W / 40W / 50W
COLOR TEMPERATURE	30K / 35K / 40K / 50K / 65K
CRI	80+ CRI
VOLTAGE	120-277VAC
EFFICIENCY	Up to 135lm/w
DIMMING	0-10V
HOUSING	Aluminum
MOUNTING	Recessed, Hanging, Surface
OPERATING TEMPERATURE	-4°F to 113°F
WARRANTY	5 Years
FINISH	White
LOCATION	Damp
CERTIFICATIONS	ETL, IC Rated

LUMENS 5000K

1X4	20W	25W	30W	35W	40W
	2,700lm	3,375lm	4,050lm	4,725lm	5,400lm
2X2	20W	25W	30W	35W	40W
	2,700lm	3,375lm	4,050lm	4,725lm	5,400lm
2X4	20W	25W	30W	40W	50W
	2,700lm	3,375lm	4,050lm	5,400lm	6,750lm

L70: 50,000+ HOURS

DIMENSIONS

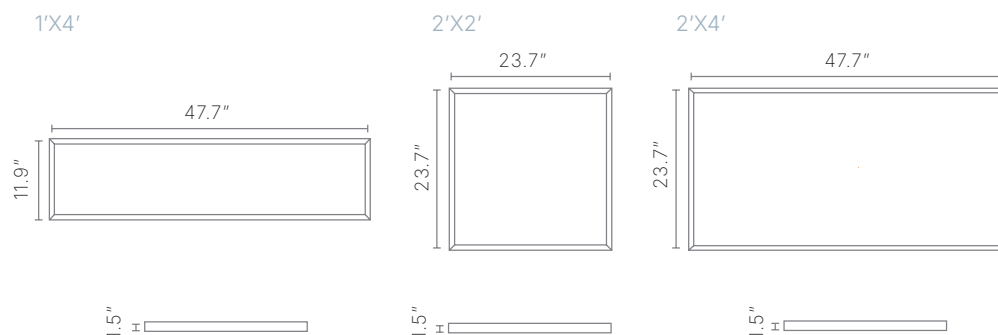

BPLA1 SERIES

CONTRACTOR GRADE PANEL

ORDERING GUIDE

Example: VA-BPLA1-LV24

VA-BPLA1

LV

VOLTAGE

[LV] 120-277VAC

SIZE / POWER

[14] 1'x4' 20W / 25W / 30W / 35W / 40W

[22] 2'x2' 20W / 25W / 30W / 35W / 40W

[24] 2'x4' 20W / 25W / 30W / 40W / 50W

BLANK

CCT

[BLANK] 30K / 35K / 40K / 50K / 65K

OPTIONS

[E] 8W EM Driver, CEC Listed ¹

¹ Consult factory for other EM options

ACCESSORIES*

SKU	DESCRIPTION
VA-SMK-14	1'x4' Surface Mount Kit
VA-SMK-22	2'x2' Surface Mount Kit
VA-SMK-24	2'x4' Surface Mount Kit
VA-DWK-14	1'x4' Drywall Flange Kit
VA-DWK-22	2'x2' Drywall Flange Kit
VA-DWK-24	2'x4' Drywall Flange Kit
VA-PSK-2	2'x2' Suspension Kit (4ft length)
VA-PSK-4	1'x4' or 2'x4' Suspension Kit (4ft length)

*Items must be ordered separately

ACCESSORIES

VA-SMK

VA-DWK

VA-PSK

EMERGENCY BATTERY OPTION

VA-EDD

PHOTOMETRICS 50W / 4000K

