

## CES2 SERIES EXIT LIGHT COMBO

The CES2 Series combines LED exit illumination with reliable LED lamp emergency lighting and energy efficiency for a maintenance-free, dependable design.


- UL 924, NEC, OSHA, NFPA 101 Life Safety Code
- Damp location listed
- Two fully adjustable emergency light heads designed to point down and light the path of egress
- Injection molded, 5VA flame retardant thermoplastic housing



### TECHNICAL DETAILS

BACKUP BATTERY	NiCad 3.6V 100mAh
VOLTAGE	120VAC / 277VAC
WEIGHT	8lbs.
MOUNTING	Wall, Ceiling
REMOTE HEAD	ERH Series & ORH Series
OPERATING TEMPERATURE	32°F to 104°F
WARRANTY	1 Year
LOCATION	Damp
CERTIFICATIONS	UL 924, NEC, OSHA, NFPA101

### DIMENSIONS

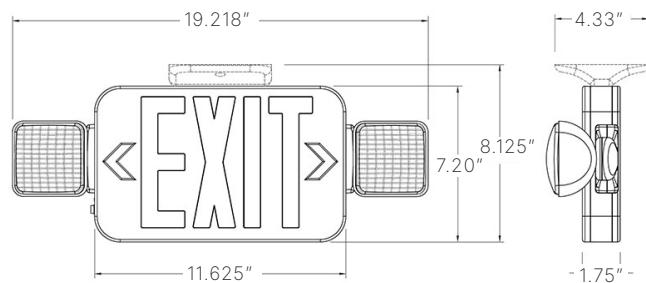

### ORDERING GUIDE

VA-CES2	_____	<input type="text"/>	_____	<input type="text"/>	_____	<input type="text"/>	_____	<input type="text"/>
		LETTER COLOR		HOUSING		OPERATION		OPTIONS
		[R] Red [G] Green		[B] Black [W] White		[BB] Battery Backup [RH] Remote head capable [ST] Self testing		[3F] 3ft Cord

Example: VA-CES2-R-B-BB

### EMERGENCY OPERATION

Upon failure of the normal utility power, an internal solidstate transfer switch automatically provides uninterrupted emergency operation for at least 90 minutes. The fully automatic solid-state, two-rate charger initiates recharging a discharged battery within 24 hours.

### BATTERY BACKUP

The CES2 Series is designed with a maintenance-free 3.6V 100mAh NiCad battery that provides a minimum emergency duration of 90 minutes. Recharge time of the battery is 24 hours.