

CLIENT
PROJECT
NOTES



## CESJR-U SERIES

### ADJUSTABLE EXIT LIGHT

The CESJR-U Series features an all LED design with no SLA batteries, using long lasting LEDs. With a lightweight, snap-together construction.


- UL924, NEC, OSHA, NFPA 70, NFPA 101
- Universal mounting canopy for top installation or flush mount to wall
- Injection molded, impact, and scratch-resistant
- Universal J-Box mounting pattern
- Damp location



### TECHNICAL DETAILS

BACKUP BATTERY	3.6V 1000mAh Ni-Mh Battery
VOLTAGE	120-277VAC
WEIGHT	10lbs.
MOUNTING	Flush Mount, Wall
REMOTE HEAD	ERH Series & ORH Series
OPERATING TEMP	32°F to 104°F
WARRANTY	1 Year
LOCATION	Damp
CERTIFICATIONS	UL924, NEC, OSHA, NFPA70, NFPA101

### DIMENSIONS

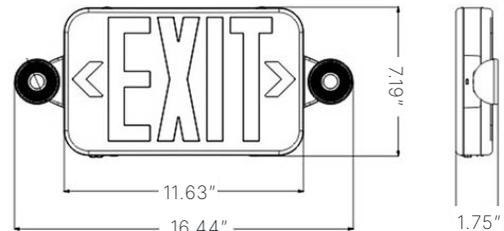

### ORDERING GUIDE

VA-CESJR	<b>U</b>	<b>W</b>	
	<b>LETTER COLOR</b>	<b>HOUSING</b>	<b>OPERATION</b>
	[U] Red / Green	[W] White	[BB] Battery Backup [RH] Remote Head Capable

Example: VA-CESJR-U-W-BB

### EMERGENCY OPERATION

Upon failure of the normal utility power, an internal solid state transfer switch automatically provides uninterrupted emergency operation for atleast 90 minutes. The fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24hours.

### BATTERY BACKUP

The CESJR-U Series is designed with a maintenance-free 3.6V 1000mAh Ni-Mh battery that provides a minimum emergency duration of 90 minutes. Recharge time of the battery is 24 hours.