

CLIENT
PROJECT
NOTES

CESR SERIES EXIT LIGHT COMBO

The CESR Series is an edge-lit exit sign, reinventing the meaning of edge-lit signage, allowing one sign to meet multiple needs for the first time.


- UL 924, NEC, OSHA, NFPA 101 Life Safety Code
- Damp location listed
- Aluminum housing with high-grade acrylic face
- Field installable arrows for left, right, or both directions
- Long life LED illumination



TECHNICAL DETAILS

BACKUP BATTERY	NiCad 3.6V 1800mAh
VOLTAGE	120VAC / 277VAC
WEIGHT	10lbs.
MOUNTING	Wall, Ceiling, Recessed
OPERATING TEMP	41°F to 104°F
WARRANTY	1 Year
LOCATION	Damp
CERTIFICATIONS	UL 924, NEC, OSHA, NFPA101

DIMENSIONS

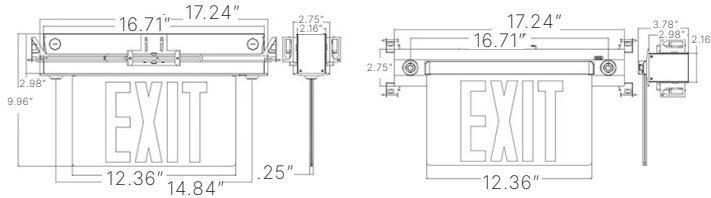

ORDERING GUIDE

VA-CESR	_____	<input type="text"/>	_____	<input type="text"/>	_____	<input type="text"/>	_____	<input type="text"/>
	LETTER COLOR		HOUSING		OPERATION		SIDES	
	[R] Red [G] Green		[A] Brushed Aluminum [B] Black [W] White		[BB] Battery Backup		[S] Single Sided [DM] Double Sided Mirrored	

Example: VA-CESR-G-A-BB-S

EMERGENCY OPERATION

Upon failure of the normal utility power, an internal solid state transfer switch automatically provides uninterrupted emergency operation for at least 90 minutes. The fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

BATTERY BACKUP

The CESR Series is designed with a 3.6V 1800mAh maintenance-free NiCad battery. The battery is protected by a low voltage cut-off circuit. The operating temperature range for the battery is 41°F (5°C) to 104°F (40°C).