

CLA SERIES

CANOPY LIGHT


The CLA Series features a sealed, high performance die-cast housing that is wet rated and suitable for both indoor and outdoor applications. Ideal for parking structures, storage areas, outdoor retail, walkways, entryways, and low level security applications.

- Available in both dark bronze and white
- Premium LEDs providing a crisp CRI
- Polycarbonate clear optical lens
- UL listed, Wet location

TECHNICAL DETAILS

POWER	20W, 27W, 40W, 60W
COLOR TEMPERATURE	4000K, 5000K
CRI	70CRI
VOLTAGE	120-277VAC
EFFICIENCY	Up to 130lm/w
DIMMING	Standard 1-10V Dimming
LUMENS	Up to 8,000lm
HOUSING	Aluminum
MOUNTING	Surface
OPERATING TEMPERATURE	-40°F to 113°F
WARRANTY	5 Years
FINISH	Dark Bronze, White
LOCATION	Wet
CERTIFICATIONS	UL Listed


DIMENSIONS

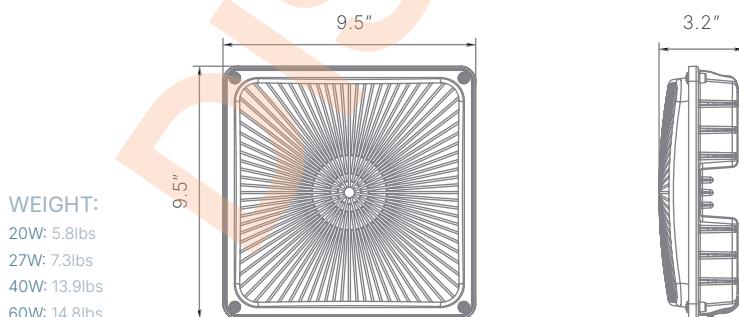

LUMENS 5000K

20W	27W	40W	60W
2,600lm	3,800lm	5,450lm	8,000lm

L70: 50,000+ HOURS



CLA SERIES

CANOPY LIGHT



VALRIYA
SPEC GRADE COMMERCIAL LED LIGHTING

ORDERING GUIDE

Example: VA-CLA-27-40-D

VA-CLA	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
	POWER	CCT	FINISH	DIMMING
[20] 20 Watts	[40] 4000K	[D] Dark Bronze	[BLANK] 1-10V Dimming	
[27] 27 Watts	[50] 5000K	[W] White	[ND] Non-Dimmable	
[40] 40 Watts				
[60] 60 Watts				

PHOTOMETRICS 60W / 5000K

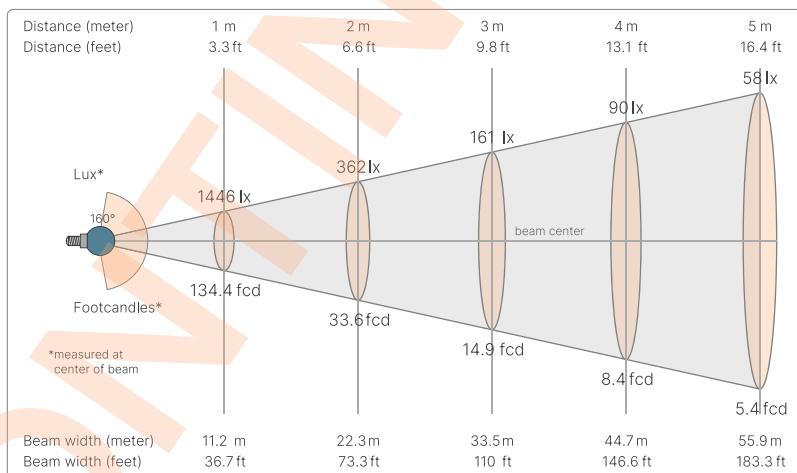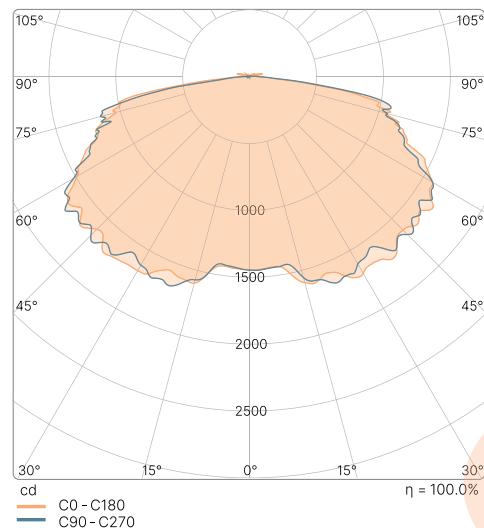

CLA SERIES

CANOPY LIGHT

VALRIYA
SPEC GRADE COMMERCIAL LED LIGHTING

SKU	WATTAGE	CCT	LUMENS	CRI	VOLTAGE	DLC	QUICK SHIP
VA-CLA-20-50-DND	20W	5000K	2600	70+	120-277VAC	No	2 Weeks
VA-CLA-20-40-DND	20W	4000K	2600	70+	120-277VAC	No	2 Weeks
VA-CLA-20-50-D	20W	5000K	2600	70+	120-277VAC	No	2 Weeks
VA-CLA-20-40-D	20W	4000K	2600	70+	120-277VAC	No	2 Weeks
VA-CLA-27-50-DND	27W	5000K	3800	70+	120-277VAC	No	2 Weeks
VA-CLA-27-40-DND	27W	4000K	3750	70+	120-277VAC	No	2 Weeks
VA-CLA-27-50-D	27W	5000K	3800	70+	120-277VAC	No	2 Weeks
VA-CLA-27-40-D	27W	4000K	3750	70+	120-277VAC	No	2 Weeks
VA-CLA-40-50-DND	40W	5000K	5450	70+	120-277VAC	No	2 Weeks
VA-CLA-40-40-DND	40W	4000K	5350	70+	120-277VAC	No	2 Weeks
VA-CLA-40-50-D	40W	5000K	5450	70+	120-277VAC	No	2 Weeks
VA-CLA-40-40-D	40W	4000K	5350	70+	120-277VAC	No	2 Weeks
VA-CLA-60-50-DND	60W	5000K	8000	70+	120-277VAC	No	2 Weeks
VA-CLA-60-40-DND	60W	4000K	7800	70+	120-277VAC	No	2 Weeks
VA-CLA-60-50-D	60W	5000K	8000	70+	120-277VAC	No	2 Weeks
VA-CLA-60-40-D	60W	4000K	7800	70+	120-277VAC	No	2 Weeks

DISCONTINUED