

CLB SERIES

LED CANOPY

The CLB Series is a high performance LED canopy light, perfect for surface mount applications. Ideal for commercial, retail, and hospitality; this fixtures housing provides excellent heat dissipation which prolongs its lifespan.


- Equipped with an external quick-mounting plate suitable for a standard J-Box mount
- Adjustable color temperature and power output
- Corrosion resistant powder coating
- UL & wet location

TECHNICAL DETAILS


POWER SMALL	24W / 36W / 48W / 60W
POWER LARGE	44W / 66W / 88W / 110W
COLOR TEMPERATURE	3000K / 4000K / 5000K
CRI	80+ CRI
VOLTAGE	120-277VAC, 120-347VAC
EFFICIENCY	Up to 168lm/w
DIMMING	0-10V
LUMENS	Up to 17,000lm
HOUSING	Aluminum
MOUNTING	Surface, Conduit Pendant
OPERATING TEMPERATURE	-40°F to 104°F
WARRANTY	5 Years
FINISH	Dark Bronze, Black, White, Gray
LOCATION	Wet
CERTIFICATIONS	UL

DIMENSIONS

SMALL

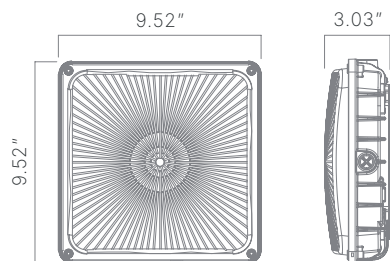

LARGE

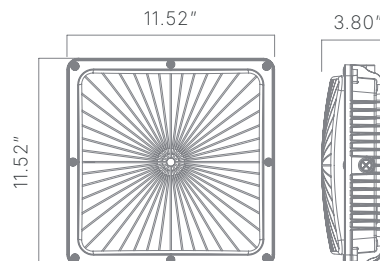

CLIENT

PROJECT

NOTES



LUMENS 4000K

65W	24W	36W	48W	60W
	4,000lm	5,600lm	7,000lm	8,400lm
110W	44W	66W	88W	110W
	7,400lm	10,800lm	14,000lm	17,000lm

L70: 50,000+ HOURS

CLB SERIES

LED CANOPY

VALRIYA
SPEC GRADE COMMERCIAL LED LIGHTING

ORDERING GUIDE

Example: VA-CLB-LVD-AD

VA-CLB				
	POWER	VOLTAGE	FINISH	CCT
	[BLANK] 24W / 36W / 48W / 60W [HO] 44W / 66W / 88W / 110W	[LV] 120-277VAC	[D] Dark Bronze [B] Black [W] White [G] Gray [C] Custom	[AD] Adjustable CCT 30K / 40K / 50K



ACCESSORIES*

SKU	DESCRIPTION
VA-CLB-EBB	5W Emergency Battery Backup + External Box
BRI-819-B-D	PIR Motion + Daylight Sensor

*Items must be ordered separately



PHOTOMETRICS 60W / 5000K

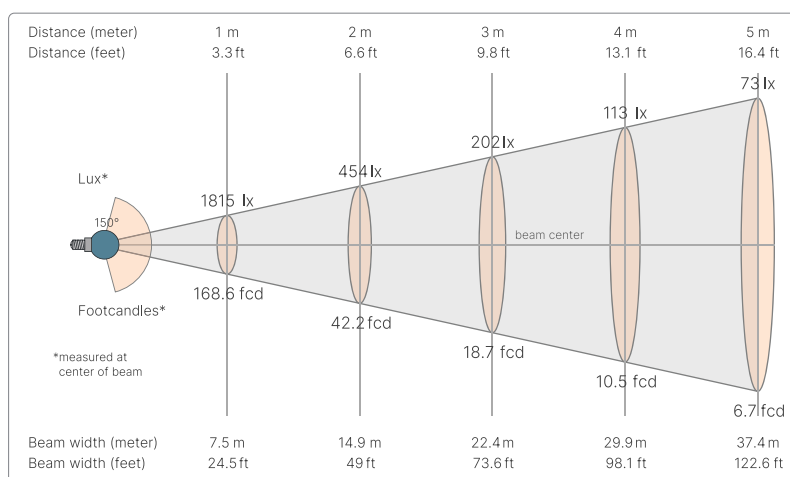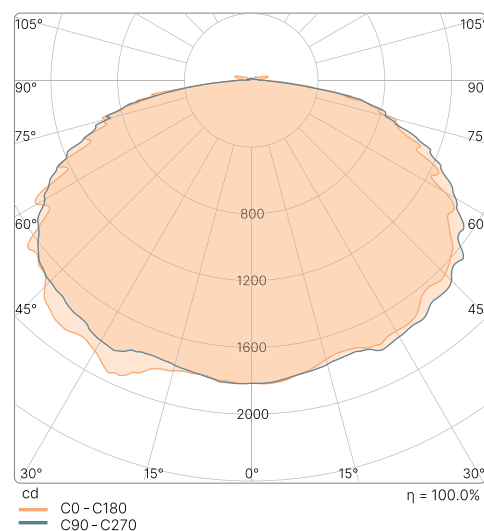

CLB SERIES

LED CANOPY

VALRIYA
SPEC GRADE COMMERCIAL LED LIGHTING

SKU	WATTS	SETTING	CCT	LUMENS	CRI	VOLTAGE ¹	DLC	QUICK SHIP
VA-CLB-LVX-AD	60W	100%	3000K	7,800	80+	120-277VAC	No	Yes
VA-CLB-LVX-AD	48W	80%	3000K	6,500	80+	120-277VAC	No	Yes
VA-CLB-LVX-AD	36W	60%	3000K	5,200	80+	120-277VAC	No	Yes
VA-CLB-LVX-AD	24W	40%	3000K	3,700	80+	120-277VAC	No	Yes
VA-CLB-LVX-AD	60W	100%	4000K	8,400	80+	120-277VAC	No	Yes
VA-CLB-LVX-AD	48W	80%	4000K	7,000	80+	120-277VAC	No	Yes
VA-CLB-LVX-AD	36W	60%	4000K	5,600	80+	120-277VAC	No	Yes
VA-CLB-LVX-AD	24W	40%	4000K	4,000	80+	120-277VAC	No	Yes
VA-CLB-LVX-AD	60W	100%	5000K	8,000	80+	120-277VAC	No	Yes
VA-CLB-LVX-AD	48W	80%	5000K	6,600	80+	120-277VAC	No	Yes
VA-CLB-LVX-AD	36W	60%	5000K	5,300	80+	120-277VAC	No	Yes
VA-CLB-LVX-AD	24W	40%	5000K	3,800	80+	120-277VAC	No	Yes
VA-CLB-HO-LVX-AD	110W	100%	3000K	16,200	80+	120-277VAC	No	No
VA-CLB-HO-LVX-AD	88W	80%	3000K	13,200	80+	120-277VAC	No	No
VA-CLB-HO-LVX-AD	66W	60%	3000K	10,200	80+	120-277VAC	No	No
VA-CLB-HO-LVX-AD	44W	40%	3000K	7,000	80+	120-277VAC	No	No
VA-CLB-HO-LVX-AD	110W	100%	4000K	17,000	80+	120-277VAC	No	No
VA-CLB-HO-LVX-AD	88W	80%	4000K	14,000	80+	120-277VAC	No	No
VA-CLB-HO-LVX-AD	66W	60%	4000K	10,800	80+	120-277VAC	No	No
VA-CLB-HO-LVX-AD	44W	40%	4000K	7,400	80+	120-277VAC	No	No
VA-CLB-HO-LVX-AD	110W	100%	5000K	16,500	80+	120-277VAC	No	No
VA-CLB-HO-LVX-AD	88W	80%	5000K	13,500	80+	120-277VAC	No	No
VA-CLB-HO-LVX-AD	66W	60%	5000K	10,500	80+	120-277VAC	No	No
VA-CLB-HO-LVX-AD	44W	40%	5000K	7,200	80+	120-277VAC	No	No

¹High Voltage (120-347VAC) option available through special order