

CLIENT

PROJECT

NOTES



## CP SERIES

### CYLINDER PENDANT

The CP Series is a modular pendant ideal for commercial, residential, retail, or educational settings. Featuring multiple sizes, beam angles, and mounting options.

- 15°, 24°, 36°, and 60° beam angle options
- Available in 3 different sizes
- Adjustable power output
- Pendant or surface mount available



## TECHNICAL DETAILS







|                       |                            |
|-----------------------|----------------------------|
| POWER 4"              | 12W / 18W / 25W            |
| POWER 6"              | 20W / 30W / 40W            |
| POWER 8"              | 30W / 45W / 58W            |
| COLOR TEMPERATURE     | 2700K, 3000K, 3500K, 4000K |
| CRI                   | 80+ CRI, 90+ CRI           |
| VOLTAGE               | 120-277VAC                 |
| EFFICIENCY            | Up to 105lm/w              |
| DIMMING               | 0-10V to 10%, 0-10V to 1%  |
| BEAM ANGLE            | 15°, 24°, 36°, 60°         |
| HOUSING               | Aluminum                   |
| MOUNTING              | Suspended, Surface         |
| OPERATING TEMPERATURE | -4°F to 104°F              |
| WARRANTY              | 5 Years                    |
| FINISH                | Black, White               |
| LOCATION              | Damp                       |
| CERTIFICATIONS        | UL                         |

## LUMENS 4000K

|    |                |                |                |
|----|----------------|----------------|----------------|
| 4" | 12W<br>1,140lm | 18W<br>1,710lm | 25W<br>2,375lm |
| 6" | 20W<br>2,100lm | 30W<br>3,150lm | 40W<br>4,200lm |
| 8" | 30W<br>2,700lm | 45W<br>4,050lm | 58W<br>5,220lm |

L70: 50,000+ HOURS

## DIMENSIONS



# CP SERIES

## CYLINDER PENDANT

VALRIYA  
SPEC GRADE COMMERCIAL LED LIGHTING

### ORDERING GUIDE

Example: VA-CP-6-30-80-10-M-B-CH


|       |                                                                                    |                                                                                                                               |                                                                    |                                                                                                                                                                                                                                                     |                                                                   |                                       |
|-------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------|---------------------------------------|
| VA-CP | <input type="text"/>                                                               | <input type="text"/>                                                                                                          | <input type="text"/>                                               | <input type="text"/>                                                                                                                                                                                                                                | <input type="text"/>                                              | <input type="text"/>                  |
|       | <b>SIZE / POWER</b>                                                                | <b>CCT</b>                                                                                                                    | <b>CRI</b>                                                         | <b>DIMMING</b>                                                                                                                                                                                                                                      | <b>BEAM</b>                                                       | <b>FINISH</b>                         |
|       | [4] 4" 12W / 18W / 25W<br>[6] 6" 20W / 30W / 40W<br>[8] 8" 30W / 45W / 58W         | [27] 2700K<br>[30] 3000K<br>[35] 3500K<br>[40] 4000K                                                                          | [80] 80+ CRI<br>[90] 90+ CRI                                       | [10] 0-10V (Dims to 10%)<br>[01] 0-10V (Dims to 1%)<br>or TRIAC Dimming                                                                                                                                                                             | [N] Narrow 15°<br>[M] Medium 24°<br>[W] Wide 36°<br>[F] Flood 60° | [B] Black<br>[W] White<br>[CU] Custom |
|       | <input type="text"/>                                                               |                                                                                                                               |                                                                    |                                                                                                                                                                                                                                                     | <input type="text"/>                                              |                                       |
|       | <b>TRIM OPTIONS</b>                                                                |                                                                                                                               |                                                                    |                                                                                                                                                                                                                                                     | <b>MOUNTING</b>                                                   |                                       |
|       | [WB] White Baffle<br>[BB] Black Baffle<br>[CO] Copper Baffle<br>[CH] Chrome Baffle | [DB] Decorative Blue<br>[DY] Decorative Yellow<br>[DG] Decorative Green<br>[DT] Decorative Transparent<br>[DR] Decorative Red | [RB] Regress Black <sup>1</sup><br>[RW] Regress White <sup>1</sup> | [PR] Pendant w/ Flat Canopy for Recessed J-Box<br>[PC] Pendant w/ Conduit Cutout Deep Canopy for Surface Mounted 4" Octagonal J-Box<br>[SR] Surface Mount to Recessed J-Box<br>[SC] Surface Mount w/ Conduit for Surface Mounted 4" Octagonal J-Box |                                                                   |                                       |

<sup>1</sup> Only available with [4] 4" option

### ACCESSORIES\*

| SKU       | DESCRIPTION                        |
|-----------|------------------------------------|
| VA-CP-CM2 | 2" Nominal Length Cable Mount      |
| VA-CP-CM4 | 4" Nominal Length Cable Mount      |
| VA-CP-CM8 | 8" Nominal Length Cable Mount      |
| VA-CP-RS2 | 2" Nominal Length Rigid Stem Mount |
| VA-CP-RS4 | 4" Nominal Length Rigid Stem Mount |
| VA-CP-RS8 | 8" Nominal Length Rigid Stem Mount |

\*Items must be ordered separately

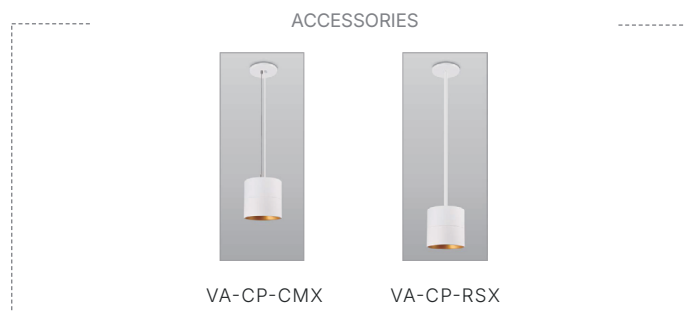


# CP SERIES

## CYLINDER PENDANT


VALRIYA  
SPEC GRADE COMMERCIAL LED LIGHTING

### PHOTOMETRICS


8" / 58W / 3000K / NARROW 15°

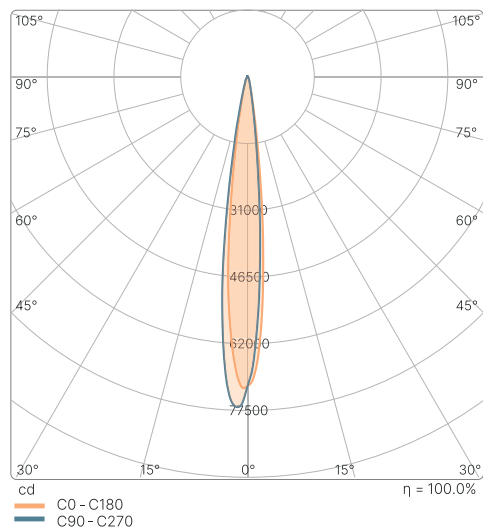

8" / 58W / 3000K / MEDIUM 24°

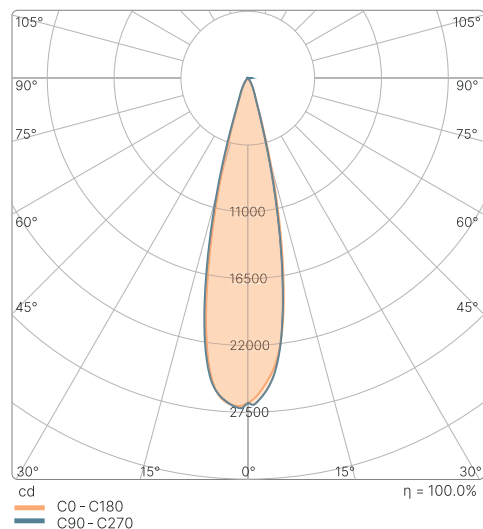

8" / 58W / 3000K / WIDE 36°

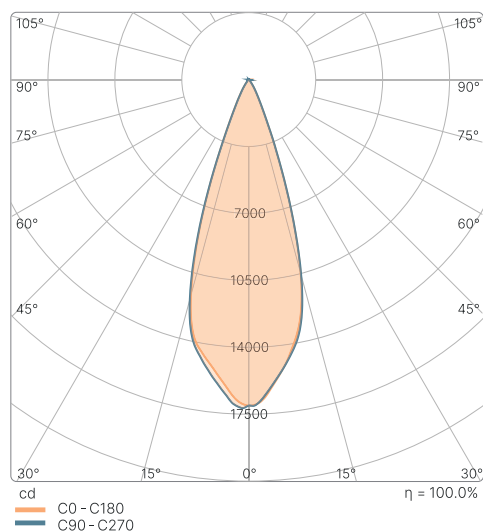

8" / 58W / 3000K / FLOOD 60°

