

CLIENT

PROJECT

NOTES

3" CP SERIES

CYLINDER PENDANT



The CP Series is a modular pendant ideal for commercial, residential, retail, or educational settings. Featuring multiple configurations, beam angles, and mounting options.

- 15°, 24°, 36°, and 60° beam angle options
- 90+ CRI standard
- Dim to warm option available
- Variety of design combinations



TECHNICAL DETAILS

POWER 3"	5W / 8W / 10W / 13W / 16W / 19W
COLOR TEMPERATURE	27K, 30K, 35K, 40K, Dim to Warm
CRI	90+ CRI, 95+ CRI
VOLTAGE	120-277VAC
EFFICIENCY	Up to 120lm/w
DIMMING	0-10V Dim to 1% or Triac
BEAM ANGLE	15°, 24°, 36°, 60°
HOUSING	Aluminum
MOUNTING	Pendant, Surface, Wall
OPERATING TEMPERATURE	-4°F to 104°F
WARRANTY	5 Years
FINISH	Black, White, Silver, Gold, Chrome
LOCATION	Damp
CERTIFICATIONS	UL

LUMENS 3000K / 24°

5W	8W	10W
575lm	960lm	1,150lm
13W	16W	19W
1,490lm	1,760lm	1,995lm

L70: 50,000+ HOURS

TRIM OPTIONS

STANDARD



DECORATIVE



WALL WASH



DROP LENS




DIMENSIONS


STANDARD




DROP LENS




PENDANT RECESSED J-BOX



CONDUIT CUTOUT FOR SURFACE J-BOX



WALL MOUNT



3" CP SERIES

CYLINDER PENDANT


VALRIYA
SPEC GRADE COMMERCIAL LED LIGHTING

ORDERING GUIDE

Example: VA-CP-3R-3090DM-WG-PCR2

VA-CP	3R			D
	SIZE / POWER	CCT	CRI	DIMMING
	[3R] 3" - 5W / 8W / 10W / 13W / 16W / 19W	[27] 2700K [30] 3000K [35] 3500K [40] 4000K [DW] Dim to Warm 30K-20K	[90] 90+ CRI [95] 95+ CRI ¹	[D] 0-10V DIM to 1% OR TRIAC
BEAM	FINISH	TRIM	MOUNTING	
[N] Narrow 15° [M] Medium 24° [W] Wide 36° [F] Flood 60°	[W] White [B] Black [S] Silver ⁴	[W] White [B] Black [G] Gold [C] Chrome [DL] Drop Lens [WWW] White Wall Wash [BWW] Black Wall Wash	[PR] ² Pendant w/ Flat Canopy for Recessed J-Box [PC] ² Pendant w/ Conduit Cutout Deep Canopy for Surface Mounted 4" Octagonal J-Box [SR] Surface Mount to Recessed J-Box [SC] Surface Mount w/ Conduit for Surface Mounted 4" Octagonal J-Box [WM] Wall Mount	
SUSPENSION	OPTIONS		OPTIC	EMERGENCY
[C2] 2ft Cable for Pendant [C4] 4ft Cable for Pendant [C8] 8ft Cable for Pendant [C12] 12ft Cable for Pendant [R2] 2ft Rigid Stem for Pendant [R4] 4ft Rigid Stem for Pendant [R8] 8ft Rigid Stem for Pendant [R12] 12ft Rigid Stem for Pendant	DECORATIVE KIT [YB] Yellow w/ Black [GB] Green w/ Black [TB] Transparent w/ Black [BB] Blue w/ Black [RB] Red w/ Black [YW] Yellow w/ White [GW] Green w/ White [TW] Transparent w/ White [BW] Blue w/ White [RW] Red w/ White		[HB] Hex Baffle ³	[E] 15W EM Driver

¹Only for Dim to Warm option ²Must also select Suspension option ³Not available with Drop Lens or Wall Wash trims ⁴Cable will be white if selecting pendant option

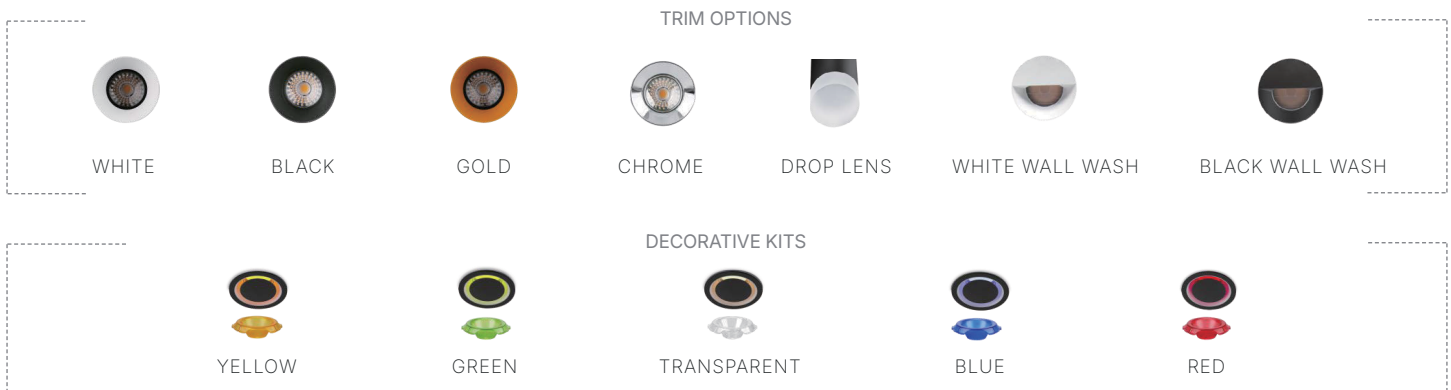

3" CP SERIES

CYLINDER PENDANT

VALRIYA
SPEC GRADE COMMERCIAL LED LIGHTING

MOUNTING OPTIONS



Pendant w/ Recessed J-Box



Pendant w/ Conduit Cutout for Surface J-Box



Surface Mount to Recessed J-Box




Surface Mount w/ Conduit Cutout for Surface J-Box




Wall Mount

PHOTOMETRICS 10W / 3000K / 36°

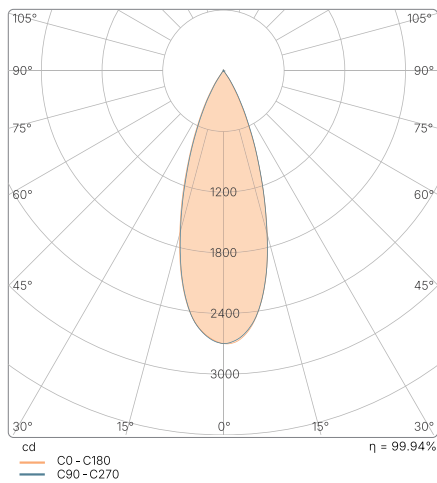

FIXED CCT 27K / 30K / 35K / 40K / 90+ CRI

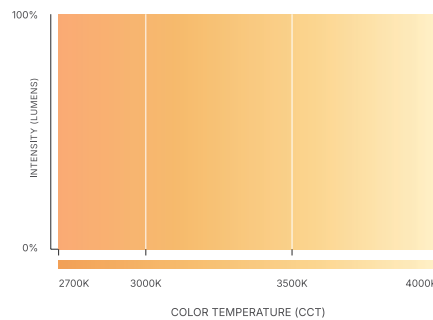

DIM TO WARM 3000K-2000K / 95+ CRI

