VALRIYA

SPEC GRADE COMMERCIAL LED LIGHTING

CLIENT
PROJECT
NOTES

4″ CP SERIES

CYLINDER PENDANT

The CP Series is a modular pendant ideal for commercial, residential, retail, or educational settings, Featuring multiple configurations, beam angles, and mounting options.

- 15°, 24°, 36°, and 60° beam angle options
- Available in multiple configurations
- Adjustable power output
- Pendant or surface mount available

TECHNICAL DETAILS

POWER 4″	12W / 18W / 25W
COLOR TEMPERATURE	2700K, 3000K, 3500K, 4000K
CRI	80+ CRI, 90+ CRI
VOLTAGE	120-277VAC
EFFICIENCY	Up to 100lm/w
DIMMING	0-10V (10%) or Triac (1%)
BEAM ANGLE	15°, 24°, 36°, 60°
HOUSING	Aluminum
MOUNTING	Suspended, Surface
OPERATING TEMPERATURE	-4°F to 104°F
WARRANTY	5 Years
FINISH	Black, White, Gold, Chrome
LOCATION	Damp
CERTIFICATIONS	UL

LUMENS 4000K

4″	12W	18W	25W
	1,140lm	1,710lm	2,375lm

L70: 50,000+ HOURS

DIMENSIONS

PENDANT RECESSED J-BOX



CONDUIT CUTOUT FOR SURFACE J-BOX



WALL MOUNT



4″ Baffle Trim



4″ Diffuser Trim



4″ Drop Lens



4″ Shade Trim

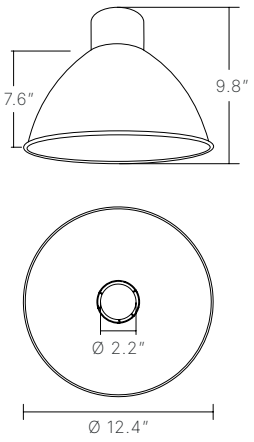

4″ CP SERIES
CYLINDER PENDANT

VALRIYA
SPEC GRADE COMMERCIAL LED LIGHTING

ORDERING GUIDE

Example: VA-CP-4-30-80-10-M-B-CB-PR-CM4

VA-CP — [4] — [CCT] — [CRI] — [DIMMING] — [BEAM] — [FINISH]

SIZE / POWER
[4] 4″ 12W / 18W / 25W

CCT
[27] 2700K
[30] 3000K
[35] 3500K
[40] 4000K

CRI
[80] 80+ CRI
[90] 90+ CRI

DIMMING
[10] 0-10V (Dims to 10%)
[01] 0-10V (Dims to 1%) or TRIAC Dimming

BEAM
[N] Narrow 15°
[M] Medium 24°
[W] Wide 36°
[F] Flood 60°
[D] Diffuser 100°
[70] Drop Lens 70°

FINISH
[B] Black
[W] White
[C] Custom

[TRIM OPTIONS] — [MOUNTING] — [SUSPENSION] — [EMERGENCY]

TRIM OPTIONS

STANDARD
[WB] White Baffle
[BB] Black Baffle
[GB] Gold Baffle
[CB] Chrome Baffle
[DL] Drop Lens [1]
[WS] White Shade
[BS] Black Shade

DIFFUSER TRIM
[WT] White Trim
[BT] Black Trim
[GT] Gold Trim
[CT] Chrome Trim

MOUNTING
[PR][2] Pendant w/ Flat Canopy for Recessed J-Box
[PC][2] Pendant w/ Conduit Cutout Deep Canopy for Surface Mounted 4″ Octagonal J-Box
[SR] Surface Mount to Recessed J-Box
[SC] Surface Mount w/ Conduit for Surface Mounted 4″ Octagonal J-Box
[WM] Wall Mount

SUSPENSION
[CM2] 2ft Cable for Pendant
[CM4] 4ft Cable for Pendant
[CM8] 8ft Cable for Pendant
[RS2] 2ft Rigid Stem for Pendant
[RS4] 4ft Rigid Stem for Pendant
[RS8] 8ft Rigid Stem for Pendant

EMERGENCY
[E] 15W EM Driver

[1] Must select [70] 70° option [2] Must also select Suspension option

MOUNTING OPTIONS

[PR]

[PC]

[SR]

[SC]

[WM]

PHOTOMETRICS 25W / 3000K / WIDE 36°

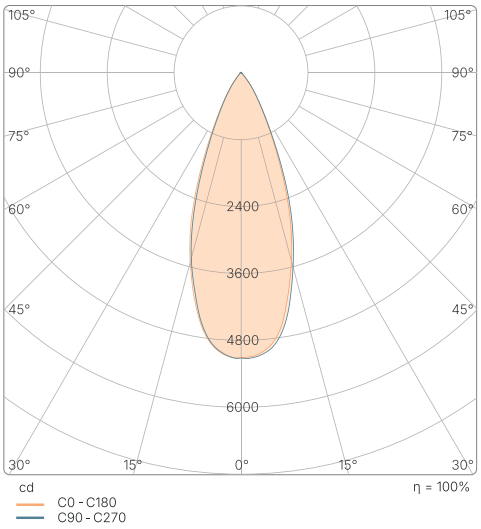

TRIM OPTIONS

WHITE

GOLD

CHROME

BLACK

DROP LENS

DIFFUSER

REGRESS WHITE

REGRESS BLACK