

CLIENT

PROJECT

NOTES

4" CP SERIES

CYLINDER PENDANT

The CP Series is a modular pendant ideal for commercial, residential, retail, or educational settings, Featuring multiple configurations, beam angles, and mounting options.

- 15°, 24°, 36°, and 60° beam angle options
- Available in multiple configurations
- Adjustable power output
- Pendant or surface mount available

WARRANTY 5 YEAR

SURFACE MOUNT

SUSPENSION

0-10V DIMMABLE

80+ CRI

90+ CRI



TECHNICAL DETAILS

POWER 4"	12W / 18W / 25W
COLOR TEMPERATURE	2700K, 3000K, 3500K, 4000K
CRI	80+ CRI, 90+ CRI
VOLTAGE	120-277VAC
EFFICIENCY	Up to 100lm/w
DIMMING	0-10V (10%) or Triac (1%)
BEAM ANGLE	15°, 24°, 36°, 60°
HOUSING	Aluminum
MOUNTING	Suspended, Surface
OPERATING TEMPERATURE	-4°F to 104°F
WARRANTY	5 Years
FINISH	Black, White, Gold, Chrome
LOCATION	Damp
CERTIFICATIONS	UL


LUMENS 4000K

4"

12W	18W	25W
1,140lm	1,710lm	2,375lm

L70: 50,000+ HOURS

DIMENSIONS

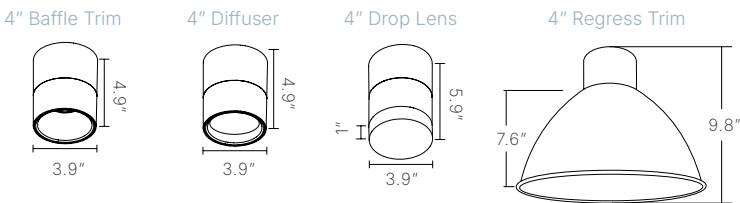

4" CP SERIES

CYLINDER PENDANT

VALRIYA
SPEC GRADE COMMERCIAL LED LIGHTING


ORDERING GUIDE

Example: VA-CP-4-30-80-10-M-B-CB-PR-CM4


VA-CP	4					
	SIZE / POWER	CCT	CRI	DIMMING	BEAM	FINISH
	[4] 4" 12W / 18W / 25W	[27] 2700K [30] 3000K [35] 3500K [40] 4000K	[80] 80+ CRI [90] 90+ CRI	[10] 0-10V (Dims to 10%) [01] 0-10V (Dims to 1%) or TRIAC Dimming	[N] Narrow 15° [M] Medium 24° [W] Wide 36° [F] Flood 60° [D] Diffuser 100° [70] 70° for Drop Lens ¹	[B] Black [W] White [C] Custom
	TRIM OPTIONS	MOUNTING	SUSPENSION		EMERGENCY	
	[WB] White Baffle [BB] Black Baffle [GB] Gold Baffle [CB] Chrome Baffle [DL] Drop Lens [RB] Regress Black [RW] Regress White	[PR] Pendant w/ Flat Canopy for Recessed J-Box [PC] Pendant w/ Conduit Cutout Deep Canopy for Surface Mounted 4" Octagonal J-Box [SR] Surface Mount to Recessed J-Box [SC] Surface Mount w/ Conduit for Surface Mounted 4" Octagonal J-Box	[CM2] 2ft Cable for Pendant [CM4] 4ft Cable for Pendant [CM8] 8ft Cable for Pendant [RS2] 2ft Rigid Stem for Pendant [RS4] 4ft Rigid Stem for Pendant [RS8] 8ft Rigid Stem for Pendant		[E] 15W EM Driver	

¹ Only available with [DL] Drop Lens option

MOUNTING OPTIONS

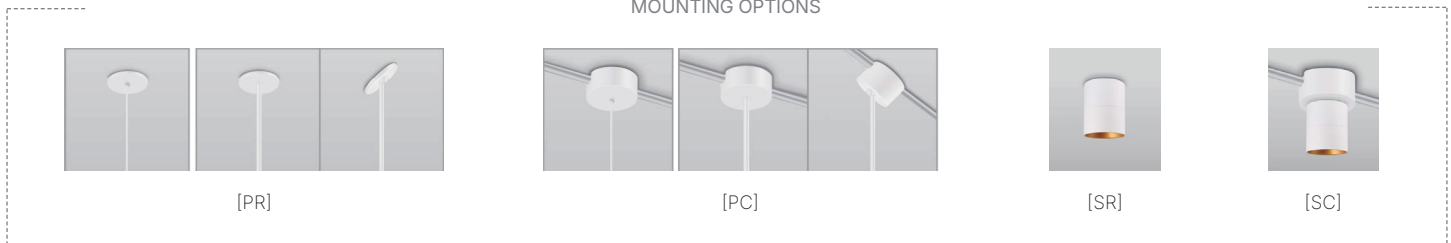

PHOTOMETRICS 25W / 3000K / WIDE 36°

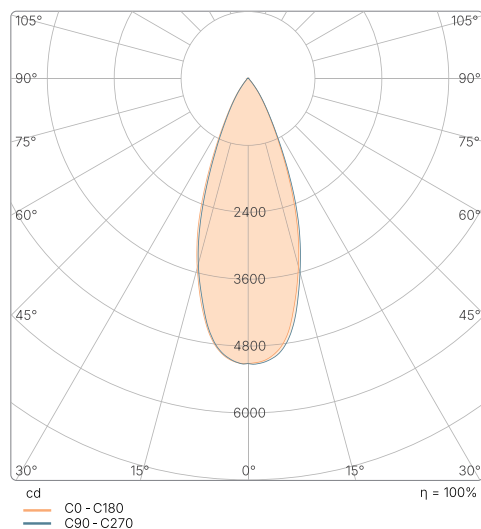

TRIM OPTIONS

