VALRIYA

SPEC GRADE COMMERCIAL LED LIGHTING

CLIENT
PROJECT
NOTES

DCS SERIES

CYLINDER SCONCE

The DCS Series features 4 way wattage output, 3 way CCT adjustment and an included photocell. Designed to provide a soft outer appearance, ideal for walkways, stairways, entrance ways, and commercial applications.

- Field selectable distribution
- Adjustable wattage output & CCT
- Wet location rated
- Included Photocell

TECHNICAL DETAILS

POWER 3″	10W / 15W / 19W / 24W
POWER 4″	12W / 18W / 24W / 30W
POWER 6″	18W / 27W / 36W / 45W
COLOR TEMPERATURE	3000K / 4000K / 5000K
CRI	80+ CRI
VOLTAGE	120-277VAC
EFFICIENCY	Up to 138lm/w
DIMMING	0-10V
BEAM ANGLE	50° / 60° / 70°
LUMENS	Up to 5,850lm
HOUSING	Aluminum
MOUNTING	Surface
OPERATING TEMPERATURE	-40°F to 122°F
WARRANTY	5 Years
FINISH	Dark Bronze, Black, White, Gray
LOCATION	Wet
CERTIFICATIONS	UL

LUMENS 4000K

3″	10W	15W	19W	24W
	1,280lm	1,900lm	2,350lm	2,900lm
4″	12W	18W	24W	30W
	1,550lm	2,270lm	2,980lm	3,660lm
6″	18W	27W	36W	45W
	2,480lm	3,670lm	4,790lm	5,850lm

L70: 50,000+ HOURS

DIMENSIONS

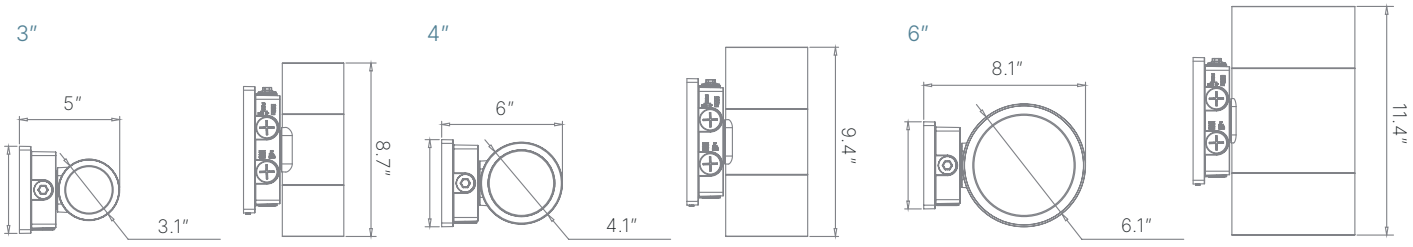

DCS SERIES
CYLINDER SCONCE

VALRIYA
SPEC GRADE COMMERCIAL LED LIGHTING

ORDERING GUIDE

Example: VA-DCS-LV4-ADJ-D

VA-DCS — [LV] — [ ] — [ADJ] — [ ]

VOLTAGE

[LV] 120-277VAC

SIZE / POWER

[3] 3″ - 10W / 15W / 19W / 24W
[4] 4″ - 12W / 18W / 24W / 30W
[6] 6″ - 18W / 27W / 36W / 45W

CCT

[ADJ] Adjustable CCT
3000K / 4000K / 5000K

FINISH

[D] Dark Bronze
[B] Black
[W] White
[G] Gray
[C] Custom

ADJUSTABLE LIGHT DISTRIBUTION

INDIRECT - 100% UP

DIRECT / INDIRECT - 50% UP / DOWN

DIRECT - 100% DOWN
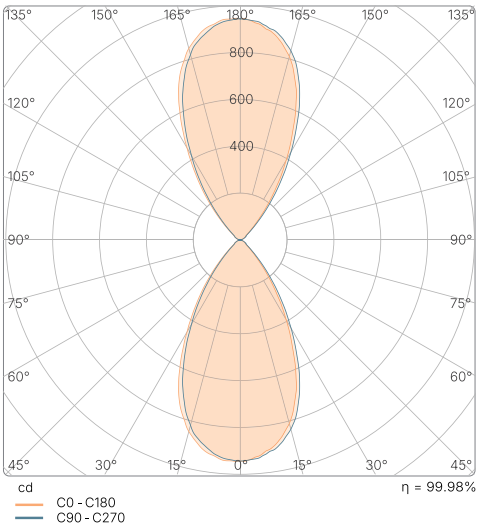
PHOTOMETRICS 4″ / 60° / 30W