

## 2" DLA SERIES

### ARCHITECTURAL DOWNLIGHT

The DLA Series is a recessed downlight with a wide array of trim styles and configurations. Featuring multiple beam angles and a modular design for any architectural project.

- 30° and 50° beam angles
- Multiple different trim styles
- 90+ CRI standard
- Features both 0-10V and Triac dimming
- Dim to warm option

### TECHNICAL DETAILS

|                       |                                 |
|-----------------------|---------------------------------|
| POWER 2"              | 5W / 8W / 10W / 13W / 16W       |
| COLOR TEMPERATURE     | 27K, 30K, 35K, 40K, Dim to Warm |
| CRI                   | 90+ CRI, 95+ CRI                |
| VOLTAGE               | 120-277VAC                      |
| EFFICIENCY            | Up to 74lm/w                    |
| DIMMING               | 0-10V Dim to 1% or TRIAC        |
| BEAM ANGLE            | 30°, 50°                        |
| HOUSING               | Aluminum                        |
| MOUNTING              | Recessed                        |
| OPERATING TEMPERATURE | -4°F to 104°F                   |
| WARRANTY              | 5 Years                         |
| FINISH                | Black, White, Gold, Chrome      |
| LOCATION              | Damp                            |
| CERTIFICATIONS        | UL                              |

CLIENT

PROJECT

NOTES




### LUMENS 3000K / ROUND / 30°


| 5W    | 8W    | 10W   |
|-------|-------|-------|
| 335lm | 544lm | 670lm |
| 13W   | 16W   |       |
| 832lm | 976lm |       |

### TRIM OPTIONS

ROUND



DECORATIVE KIT



# 2" DLA SERIES

## ARCHITECTURAL DOWNLIGHT


VALRIYA  
SPEC GRADE COMMERCIAL LED LIGHTING

### ORDERING GUIDE

Example: VA-DLA-2R-ADJ-TW-3090D-B30TA-W-RM

|        |                                                                                                                                                                                                                                            |                                               |                                                                                                                             |                                                                                                 |                                           |                                    |
|--------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|-------------------------------------------|------------------------------------|
| VA-DLA | <b>2R</b>                                                                                                                                                                                                                                  | <b>ADJ</b>                                    |                                                                                                                             |                                                                                                 |                                           | <b>D</b>                           |
|        | <b>STYLE</b>                                                                                                                                                                                                                               | <b>POWER</b>                                  | <b>FLANGE</b>                                                                                                               | <b>CCT</b>                                                                                      | <b>CRI</b>                                | <b>DIMMING</b>                     |
|        | [2R] 2" Round                                                                                                                                                                                                                              | [ADJ] Adjustable<br>5W / 8W / 10W / 13W / 16W | [TW] Trimmed w/ White Flange<br>[TB] Trimmed w/ Black Flange<br>[TL] Trimless <sup>3</sup><br>[WC] Trimless in Wood Ceiling | [27] 2700K<br>[30] 3000K<br>[35] 3500K<br>[40] 4000K<br>[DW] Dim to Warm 30K-20K                | [90] 90+ CRI<br>[95] 95+ CRI <sup>1</sup> | [D] 0-10V<br>DIM to 1%<br>OR TRIAC |
|        | <b>BEAM</b>                                                                                                                                                                                                                                | <b>HOLDER</b>                                 | <b>TRIM</b>                                                                                                                 | <b>MOUNTING</b>                                                                                 |                                           |                                    |
|        | [B30] Beam 30°<br>[B50] Beam 50°                                                                                                                                                                                                           | [TA] Tilt Angle & 360° Adjustment             | [W] White<br>[B] Black<br>[G] Gold<br>[C] Chrome                                                                            | [RM] Remodel<br>[NF] New Construction Frame Kit<br>[NH] New Construction Housing Insulation Kit |                                           |                                    |
|        | <b>OPTIONS</b>                                                                                                                                                                                                                             | <b>EMERGENCY</b>                              |                                                                                                                             |                                                                                                 |                                           |                                    |
|        | <b>DECORATIVE KIT</b>                                                                                                                                                                                                                      | [E] 15W EM Driver                             |                                                                                                                             |                                                                                                 |                                           |                                    |
|        | [YB] Yellow w/ Black<br>[GB] Green w/ Black<br>[TB] Transparent w/ Black<br>[BB] Blue w/ Black<br>[RB] Red w/ Black<br>[YW] Yellow w/ White<br>[GW] Green w/ White<br>[TW] Transparent w/ White<br>[BW] Blue w/ White<br>[RW] Red w/ White |                                               |                                                                                                                             |                                                                                                 |                                           |                                    |
|        | <b>OPTIC</b>                                                                                                                                                                                                                               |                                               |                                                                                                                             |                                                                                                 |                                           |                                    |
|        | [HB] Hex Baffle <sup>2</sup><br>[WL] Wet Rated Lens <sup>2</sup>                                                                                                                                                                           |                                               |                                                                                                                             |                                                                                                 |                                           |                                    |

<sup>1</sup> Only available with [DW] Dim to Warm   <sup>2</sup> Only available with Standard Trim options   <sup>3</sup> For Sheetrock and Plaster only



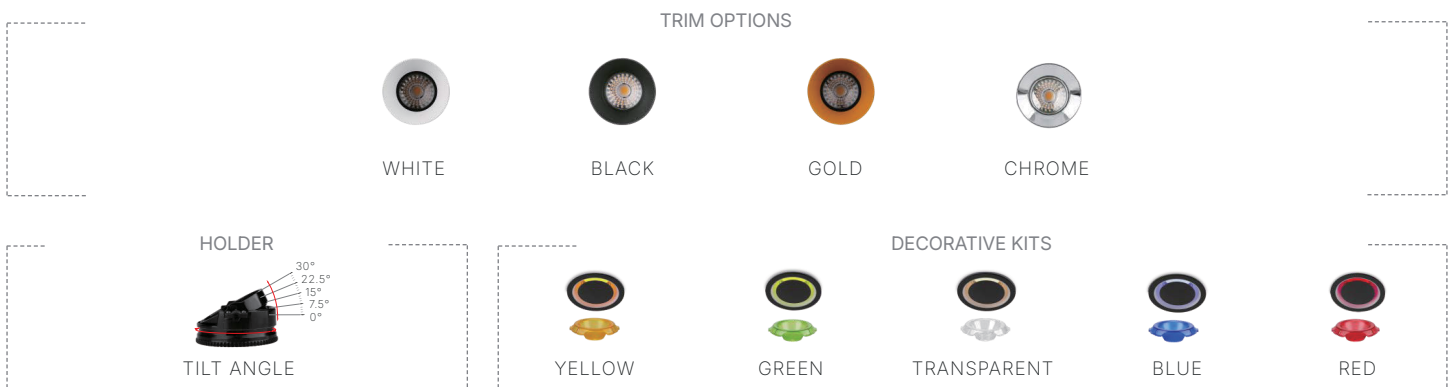


# 2" DLA SERIES

## ARCHITECTURAL DOWNLIGHT

VALRIYA  
SPEC GRADE COMMERCIAL LED LIGHTING

### DIMENSIONS

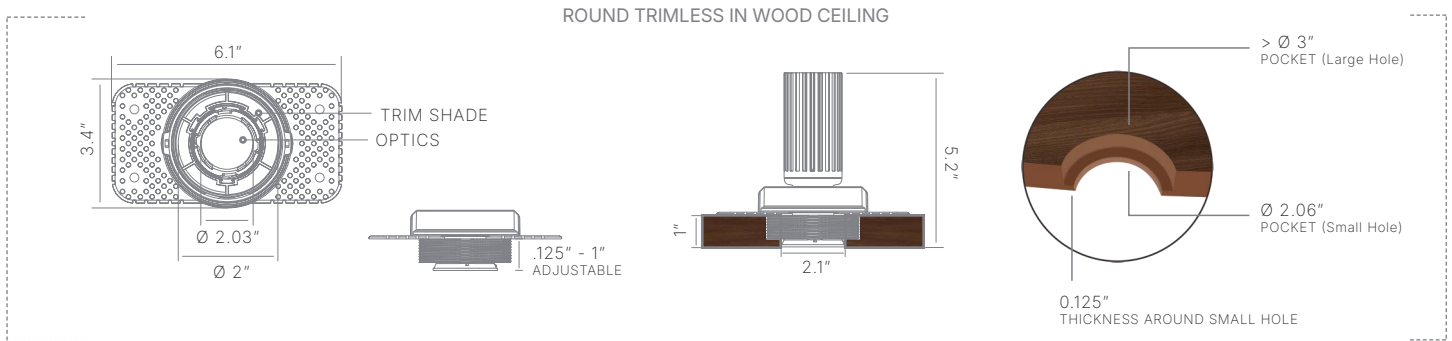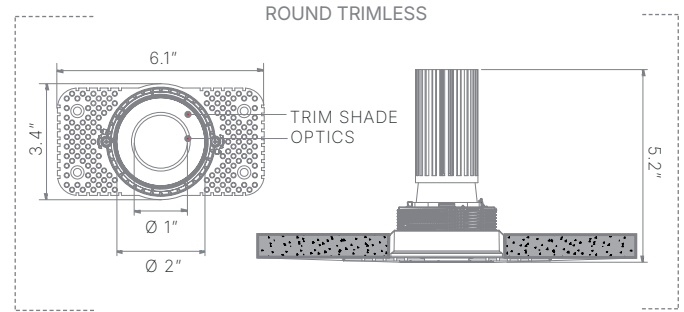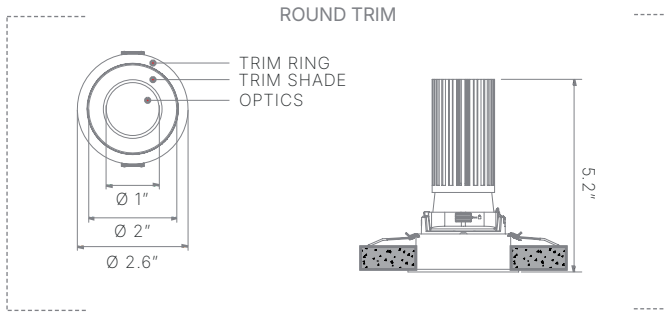


# 2" DLA SERIES

## ARCHITECTURAL DOWNLIGHT

VALRIYA  
SPEC GRADE COMMERCIAL LED LIGHTING


### MOUNTING

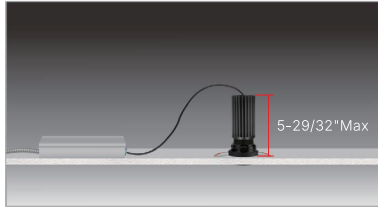

CAN BE INSTALLED IN EXISTING CEILING

#### REMODEL (INSTALL FROM BELOW)


REMOTE DRIVER BOX  
1 FIXTURE PER REMOTE DRIVER

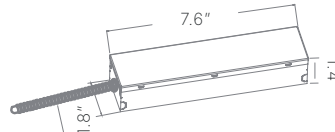


CONDUIT PROVIDED BY OTHERS

#### MOUNTING SPACE REQUIRED

UP TO 10W:




UP TO 19W:




#### NEW CONSTRUCTION (INSTALL FROM ABOVE)


##### FRAME KIT (NON-IC)





##### HOUSING INSULATION KIT (IC)




##### 2" ROUND TRIM




##### 2" ROUND TRIMLESS

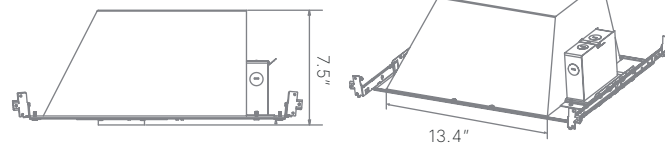

### PHOTOMETRICS 10W / 3000K / 50°

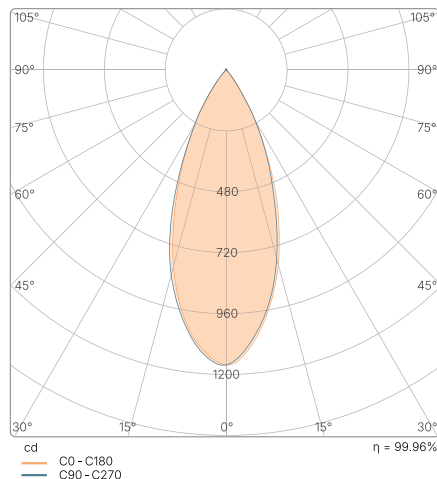

#### FIXED CCT 27K / 30K / 35K / 40K / 90+ CRI

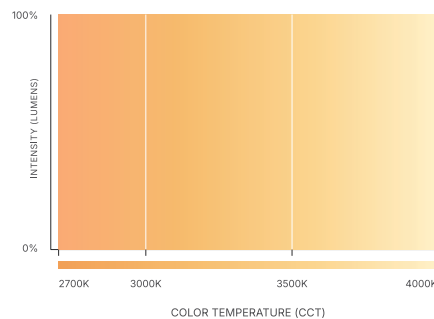

#### DIM TO WARM 3000K-2000K / 95+ CRI

