VALRIYA

SPEC GRADE COMMERCIAL LED LIGHTING

CLIENT
PROJECT
NOTES

2″ DLA SERIES

ARCHITECTURAL DOWNLIGHT

The DLA Series is a recessed downlight with a wide array of trim styles and configurations. Featuring multiple beam angles and a modular design for any architectural project.

- 30° and 50° beam angles
- Multiple different trim styles
- 90+ CRI standard
- Features both 0-10V and Triac dimming
- Dim to warm option

TECHNICAL DETAILS

POWER 2″	5W / 8W / 10W / 13W / 16W
COLOR TEMPERATURE	27K, 30K, 35K, 40K, Dim to Warm
CRI	90+ CRI, 95+ CRI
VOLTAGE	120-277VAC
EFFICIENCY	Up to 74lm/w
DIMMING	0-10V Dim to 1% or TRIAC
BEAM ANGLE	30°, 50°
HOUSING	Aluminum
MOUNTING	Recessed
OPERATING TEMPERATURE	-4°F to 104°F
WARRANTY	5 Years
FINISH	Black, White, Gold, Chrome
LOCATION	Damp
CERTIFICATIONS	UL

LUMENS 3000K / ROUND / 30°

5W	8W	10W
335lm	544lm	670lm
13W		16W
832lm		976lm

TRIM OPTIONS

ROUND



DECORATIVE KIT

2″ DLA SERIES
ARCHITECTURAL DOWNLIGHT

VALRIYA
SPEC GRADE COMMERCIAL LED LIGHTING

ORDERING GUIDE

Example: VA-DLA-2R-ADJ-TW-3090D-B30TA-W-RM

VA-DLA — [2R] — [ADJ] — [ ] — [ ] — [ ] — [D]

STYLE
[2R] 2″ Round

POWER
[ADJ] Adjustable
5W / 8W / 10W / 13W / 16W

FLANGE
[TW] Trimmed w/ White Flange
[TB] Trimmed w/ Black Flange
[TL] Trimless [3]
[WC] Trimless in Wood Ceiling

CCT
[27] 2700K
[30] 3000K
[35] 3500K
[40] 4000K
[DW] Dim to Warm 30K-20K

CRI
[90] 90+ CRI
[95] 95+ CRI [1]

DIMMING
[D] 0-10V
DIM to 1%
OR TRIAC

BEAM
[S30] Beam 30°
[S50] Beam 50°

HOLDER
[TA] Tilt Angle & 360° Adjustment

TRIM
[W] White
[B] Black
[G] Gold
[C] Chrome

OPTIONS

DECORATIVE KIT
[YB] Yellow w/ Black
[GB] Green w/ Black
[TB] Transparent w/ Black
[BB] Blue w/ Black
[RB] Red w/ Black
[YW] Yellow w/ White
[GW] Green w/ White
[TW] Transparent w/ White
[BW] Blue w/ White
[RW] Red w/ White

OPTIC
[HB] Hex Baffle [2]
[WL] Wet Rated Lens [2]

MOUNTING
[RM] Remodel
[FK] New Construction Frame Kit
[HK] New Construction Housing Insulation Kit

EMERGENCY
[E] 15W EM Driver

[1] Only available with [DW] Dim to Warm [2] Only available with Standard Trim options [3] For Sheetrock and Plaster only

TRIM OPTIONS

WHITE

BLACK

GOLD

CHROME

HOLDER

TILT ANGLE

DECORATIVE KITS

YELLOW

GREEN

TRANSPARENT

BLUE

RED

2″ DLA SERIES
ARCHITECTURAL DOWNLIGHT

VALRIYA
SPEC GRADE COMMERCIAL LED LIGHTING

DIMENSIONS

ROUND TRIM

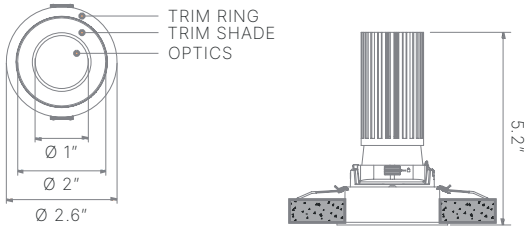

ROUND TRIMLESS

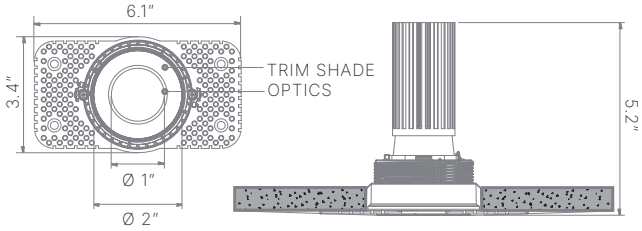

ROUND TRIMLESS IN WOOD CEILING

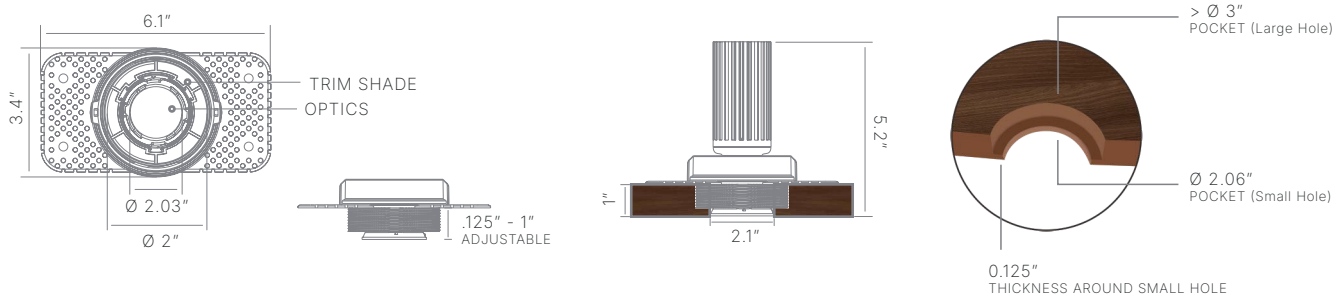

2″ DLA SERIES
ARCHITECTURAL DOWNLIGHT

VALRIYA
SPEC GRADE COMMERCIAL LED LIGHTING

MOUNTING

REMODEL (INSTALL FROM BELOW)

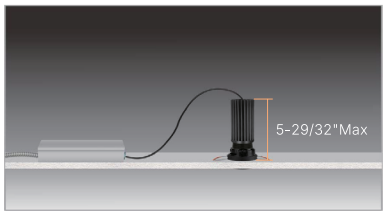

CAN BE INSTALLED IN EXISTING CEILING

REMOTE DRIVER BOX

1 FIXTURE PER REMOTE DRIVER



CONDUIT PROVIDED BY OTHERS

MOUNTING SPACE REQUIRED

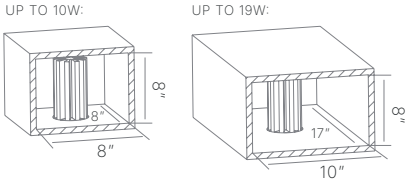

NEW CONSTRUCTION (INSTALL FROM ABOVE)

FRAME KIT (NON-IC)





2″ ROUND TRIM



HOUSING INSULATION KIT (IC)



2″ ROUND TRIMLESS



PHOTOMETRICS 10W / 3000K / 50°

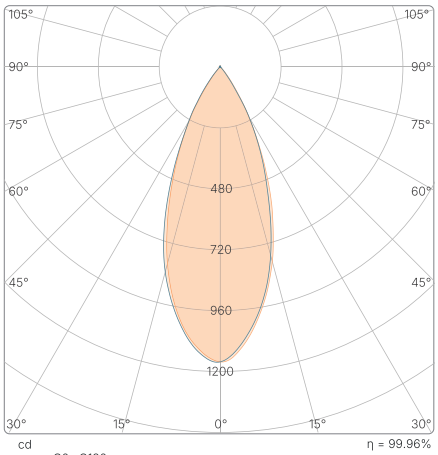

FIXED CCT 27K / 30K / 35K / 40K / 90+ CRI

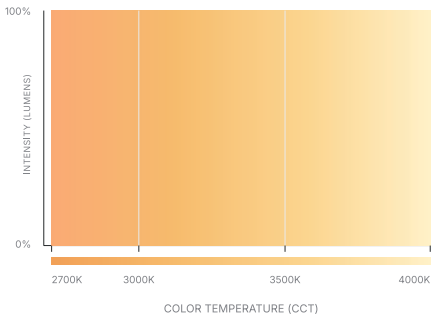
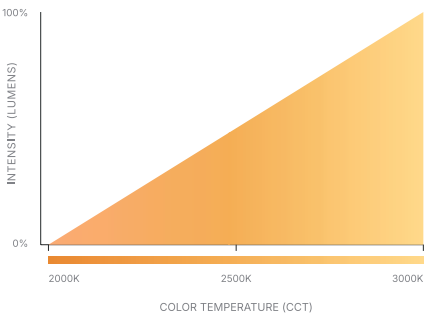
DIM TO WARM 3000K-2000K / 95+ CRI