VALRIYA

SPEC GRADE COMMERCIAL LED LIGHTING

CLIENT
PROJECT
NOTES

3″ DLA SERIES

ARCHITECTURAL DOWNLIGHT

The DLA Series is a recessed downlight with a wide array of trim styles and configurations. Featuring multiple beam angles and a modular design for any architectural project.

- 15°, 18°, 24°, 36°, 38°, 50° and 60° beam angles
- Multiple different trim styles
- 90+ CRI standard
- Features both 0-10V and Triac dimming
- Dim to warm option

TECHNICAL DETAILS

POWER 3″	5W / 8W / 10W / 13W / 16W / 19W
COLOR TEMPERATURE	27K, 30K, 35K, 40K, Dim to Warm
CRI	90+ CRI, 95+ CRI
VOLTAGE	120-277VAC
EFFICIENCY	Up to 100lm/w
DIMMING	0-10V Dim to 1% or TRIAC
BEAM ANGLE	15°, 18°, 24°, 36°, 38°, 50°, 60°
HOUSING	Aluminum
MOUNTING	Recessed
OPERATING TEMPERATURE	-4°F to 104°F
WARRANTY	5 Years
FINISH	Black, White, Gold, Chrome
LOCATION	Damp
CERTIFICATIONS	UL

LUMENS 3000K / ROUND / 24°

5W	8W	10W
475lm	800lm	990lm
13W	16W	19W
1,235lm	1,456lm	1,690lm

TRIM OPTIONS

ROUND | ROUND PINHOLE | OVAL PINHOLE | ROUND WALL WASH | DECORATIVE KIT | SQUARE WALL WASH | SQUARE

3″ DLA SERIES
ARCHITECTURAL DOWNLIGHT

VALRIYA
SPEC GRADE COMMERCIAL LED LIGHTING

ORDERING GUIDE

Example: VA-DLA-3R-ADJ-TW-3090D-B36TA-W-RM

VA-DLA — [ ] — [ADJ] — [ ] — [ ] — [ ] — [D]

STYLE
[3R] 3″ Round
[3S] 3″ Square

POWER
[ADJ] Adjustable
5W / 8W / 10W / 13W / 16W / 19W

FLANGE
[TW] Trimmed w/ White Flange
[TB] Trimmed w/ Black Flange
[TL] Trimless [3]
[WC] Trimless in Wood Ceiling

CCT
[27] 2700K
[30] 3000K
[35] 3500K
[40] 4000K
[DW] Dim to Warm 30K-20K

CRI
[90] 90+ CRI
[95] 95+ CRI [1]

DIMMING
[D] 0-10V DIM to 1% OR TRIAC

BEAM
[S15] Beam 15°
[S24] Beam 24°
[S36] Beam 36°
[S60] Beam 60°
[L18] Low Glare 18°
[L24] Low Glare 24°
[L38] Low Glare 38°
[L50] Low Glare 50°

HOLDER
[HA] 360° Horizontal Adjustment
[TA] Tilt Angle & 360° Adjustment

TRIM

STANDARD
[W] White
[B] Black
[G] Gold
[C] Chrome

WALL WASH
[WWW] White
[BWW] Black

PINHOLE ROUND
[PWW] Inside White, Outside White
[PBW] Inside Black, Outside White
[PGW] Inside Gold, Outside White
[PCW] Inside Chrome, Outside White
[PWB] Inside White, Outside Black
[PBB] Inside Black, Outside Black
[PGB] Inside Gold, Outside Black
[PCB] Inside Chrome, Outside Black

PINHOLE OVAL
[OWW] Inside White, Outside White
[OBW] Inside Black, Outside White
[OGW] Inside Gold, Outside White
[OCW] Inside Chrome, Outside White
[OWB] Inside White, Outside Black
[OBB] Inside Black, Outside Black
[OGB] Inside Gold, Outside Black
[OCB] Inside Chrome, Outside Black

OPTIONS

DECORATIVE KIT
[YB] Yellow w/ Black
[GB] Green w/ Black
[TB] Transparent w/ Black
[BB] Blue w/ Black
[RB] Red w/ Black
[YW] Yellow w/ White
[GW] Green w/ White
[TW] Transparent w/ White
[BW] Blue w/ White
[RW] Red w/ White

OPTIC
[HB] Hex Baffle [2]
[WL] Wet Rated Lens [2]

MOUNTING
[RM] Remodel
[FK] New Construction Frame Kit
[HK] New Construction Housing Insulation Kit

EMERGENCY
[E] 15W EM Driver

[1] Only available with [DW] Dim to Warm [2] Only available with Standard Trim options [3] For Sheetrock and Plaster only

STANDARD TRIM OPTIONS

WHITE | BLACK | GOLD | CHROME | WHITE WALL WASH | BLACK WALL WASH

WHITE PINHOLE TRIM OPTIONS

WHITE | BLACK | GOLD | CHROME

BLACK PINHOLE TRIM OPTIONS

WHITE | BLACK | GOLD | CHROME

HOLDER

360° HORIZONTAL | TILT ANGLE

DECORATIVE KITS



YELLOW | GREEN | TRANSPARENT | BLUE | RED

3″ DLA SERIES
ARCHITECTURAL DOWNLIGHT

VALRIYA
SPEC GRADE COMMERCIAL LED LIGHTING

DIMENSIONS

TRIM OPTIONS

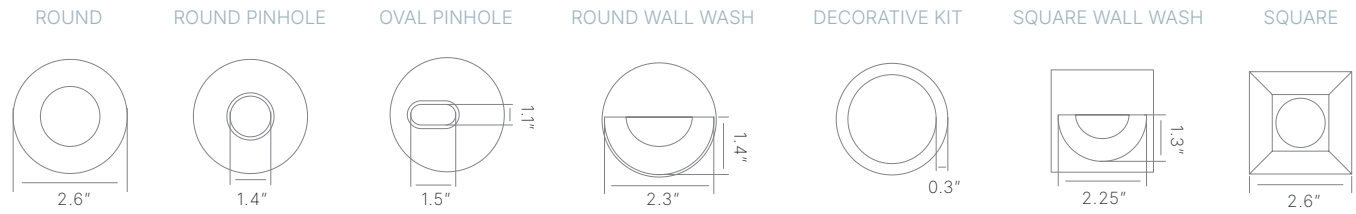

ROUND TRIM

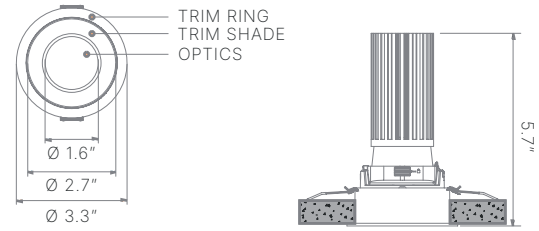

ROUND TRIMLESS

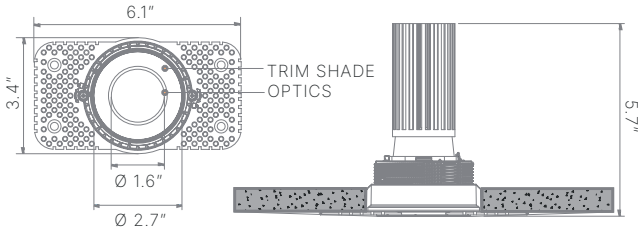

SQUARE TRIM

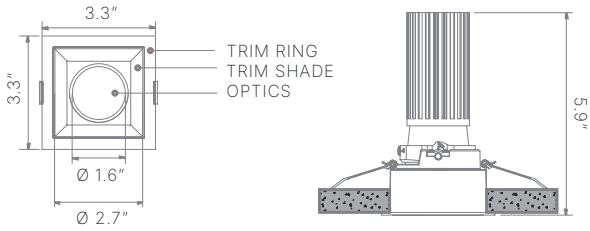

SQUARE TRIMLESS

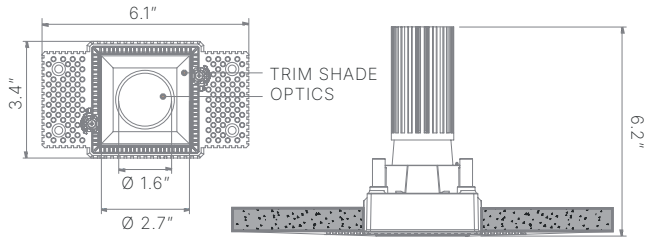

ROUND TRIMLESS IN WOOD CEILING

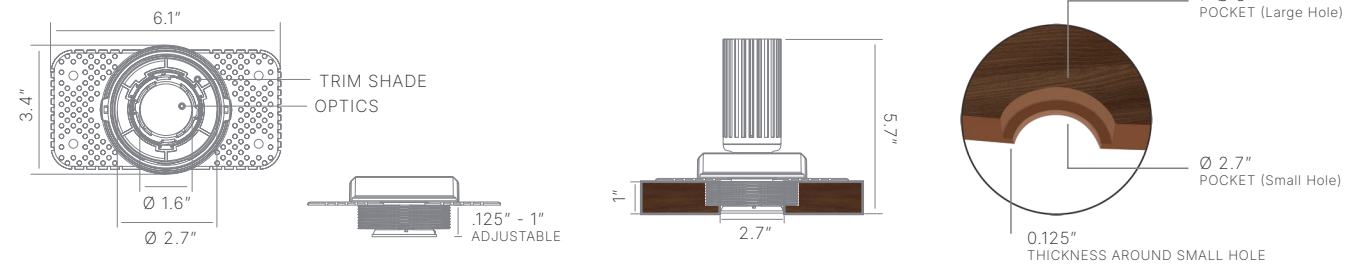

SQUARE TRIMLESS IN WOOD CEILING

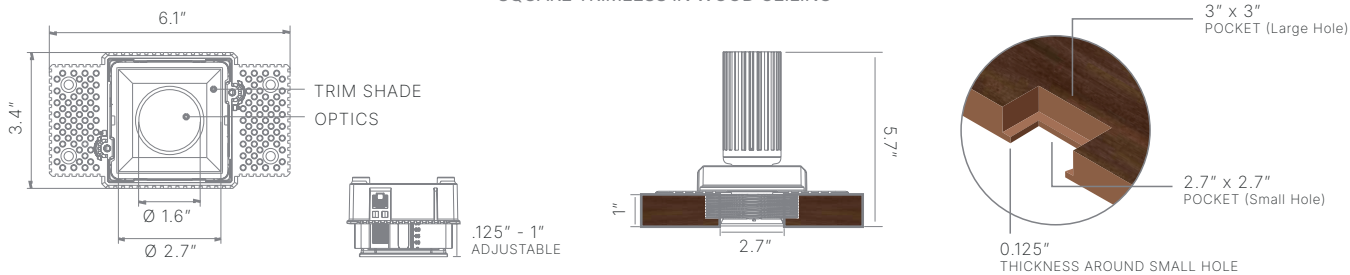

3″ DLA SERIES
ARCHITECTURAL DOWNLIGHT

VALRIYA
SPEC GRADE COMMERCIAL LED LIGHTING

MOUNTING

REMODEL (INSTALL FROM BELOW)

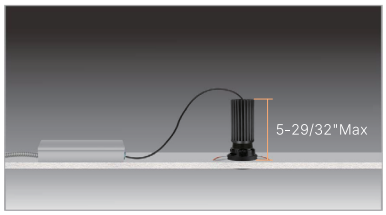

CAN BE INSTALLED IN EXISTING CEILING

REMOTE DRIVER BOX

1 FIXTURE PER REMOTE DRIVER



CONDUIT PROVIDED BY OTHERS

MOUNTING SPACE REQUIRED

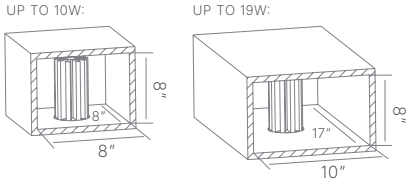

NEW CONSTRUCTION (INSTALL FROM ABOVE)

FRAME KIT (NON-IC)





HOUSING INSULATION KIT (IC)

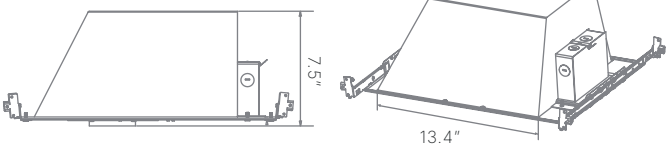

3″ ROUND TRIM



3″ ROUND TRIMLESS



3″ SQUARE TRIM



3″ SQUARE TRIMLESS



PHOTOMETRICS 10W / 3000K / 60°

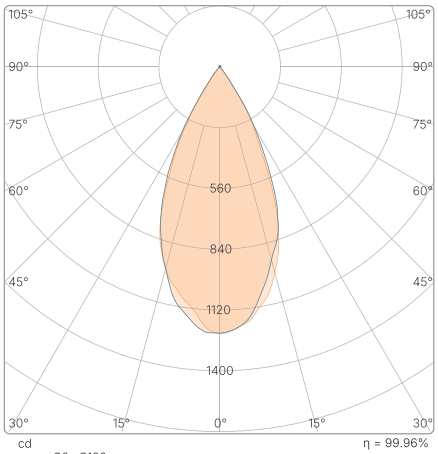

FIXED CCT 27K / 30K / 35K / 40K / 90+ CRI

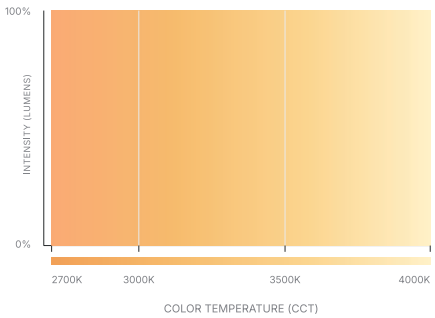
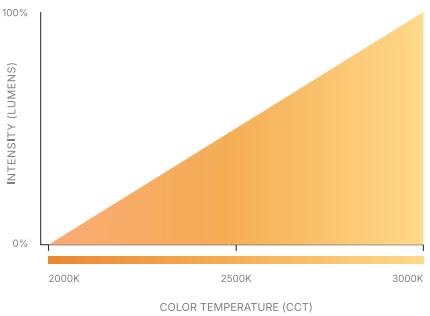
DIM TO WARM 3000K-2000K / 95+ CRI