

CLIENT

PROJECT

NOTES

3" DLA SERIES

ARCHITECTURAL DOWNLIGHT

The DLA Series is a recessed downlight with a wide array of trim styles and configurations. Featuring multiple beam angles and a modular design for any architectural project.

- 15°, 18°, 24°, 36°, 38°, 50° and 60° beam angles
- Multiple different trim styles
- 90+ CRI standard
- Features both 0-10V and Triac dimming
- Dim to warm option



TECHNICAL DETAILS


POWER 3"	5W / 8W / 10W / 13W / 16W / 19W
COLOR TEMPERATURE	27K, 30K, 35K, 40K, Dim to Warm
CRI	90+ CRI, 95+ CRI
VOLTAGE	120-277VAC
EFFICIENCY	Up to 100lm/w
DIMMING	0-10V Dim to 1% or TRIAC
BEAM ANGLE	15°, 18°, 24°, 36°, 38°, 50°, 60°
HOUSING	Aluminum
MOUNTING	Recessed
OPERATING TEMPERATURE	-4°F to 104°F
WARRANTY	5 Years
FINISH	Black, White, Gold, Chrome
LOCATION	Damp
CERTIFICATIONS	UL

LUMENS 3000K / ROUND / 24°


5W	8W	10W
475lm	800lm	990lm
13W	16W	19W
1,235lm	1,456lm	1,690lm

TRIM OPTIONS


ROUND



ROUND PINHOLE



OVAL PINHOLE



ROUND WALL WASH




DECORATIVE KIT



SQUARE WALL WASH



SQUARE



3" DLA SERIES

ARCHITECTURAL DOWNLIGHT

VALRIYA
SPEC GRADE COMMERCIAL LED LIGHTING

ORDERING GUIDE

Example: VA-DLA-3R-ADJ-TW-3090D-B36TA-W-RM

VA-DLA		ADJ				D
	STYLE	POWER	FLANGE	CCT	CRI	DIMMING
	[3R] 3" Round [3S] 3" Square	[ADJ] Adjustable 5W / 8W / 10W / 13W / 16W / 19W	[TW] Trimmed w/ White Flange [TB] Trimmed w/ Black Flange [TL] Trimless ³ [WC] Trimless in Wood Ceiling	[27] 2700K [30] 3000K [35] 3500K [40] 4000K [DW] Dim to Warm 30K-20K	[90] 90+ CRI [95] 95+ CRI ¹	[D] 0-10V DIM to 1% OR TRIAC
BEAM	HOLDER	TRIM				
[B15] Beam 15° [B24] Beam 24° [B36] Beam 36° [B60] Beam 60° [L18] Low Glare 18° [L24] Low Glare 24° [L38] Low Glare 38° [L50] Low Glare 50°	[HA] 360° Horizontal Adjustment [TA] Tilt Angle & 360° Adjustment	STANDARD [W] White [B] Black [G] Gold [C] Chrome WALL WASH [WWW] White [BWW] Black	PINHOLE ROUND [PWW] Inside White, Outside White [PBW] Inside Black, Outside White [PGW] Inside Gold, Outside White [PCW] Inside Chrome, Outside White [PWB] Inside White, Outside Black [PBB] Inside Black, Outside Black [PGB] Inside Gold, Outside Black [PCB] Inside Chrome, Outside Black	PINHOLE OVAL [OWW] Inside White, Outside White [OBW] Inside Black, Outside White [OGW] Inside Gold, Outside White [OCW] Inside Chrome, Outside White [OWB] Inside White, Outside Black [OBB] Inside Black, Outside Black [OGB] Inside Gold, Outside Black [OCB] Inside Chrome, Outside Black		
MOUNTING	OPTIONS		EMERGENCY			
[RM] Remodel [NF] New Construction Frame Kit [NH] New Construction Housing Insulation Kit	DECORATIVE KIT [YB] Yellow w/ Black [GB] Green w/ Black [TB] Transparent w/ Black [BB] Blue w/ Black [RB] Red w/ Black [YW] Yellow w/ White [GW] Green w/ White [TW] Transparent w/ White [BW] Blue w/ White [RW] Red w/ White		EMERGENCY [E] 15W EM Driver			
			OPTIC [HB] Hex Baffle ² [WL] Wet Rated Lens ²			

¹ Only available with [DW] Dim to Warm ² Only available with Standard Trim options ³ For Sheetrock and Plaster only




3" DLA SERIES

ARCHITECTURAL DOWNLIGHT


VALRIYA
SPEC GRADE COMMERCIAL LED LIGHTING

DIMENSIONS


TRIM OPTIONS

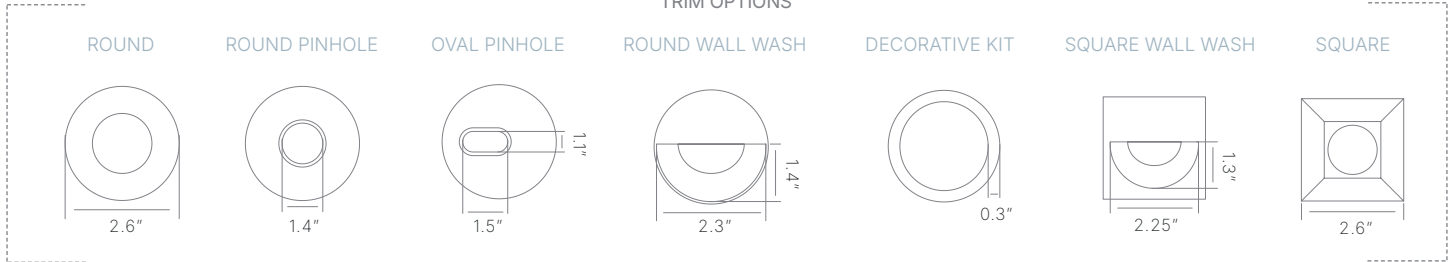


ROUND TRIM

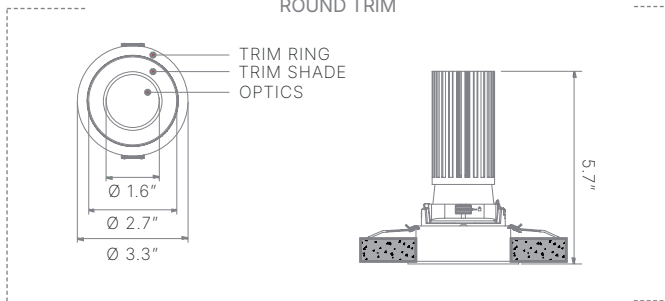


ROUND TRIMLESS

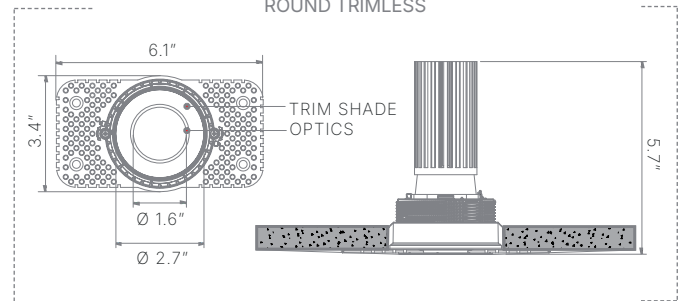


SQUARE TRIM

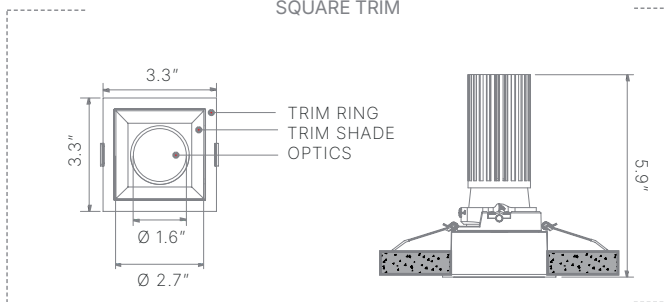

SQUARE TRIMLESS

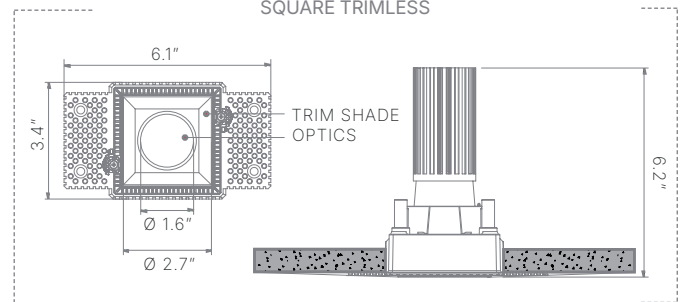

ROUND TRIMLESS IN WOOD CEILING

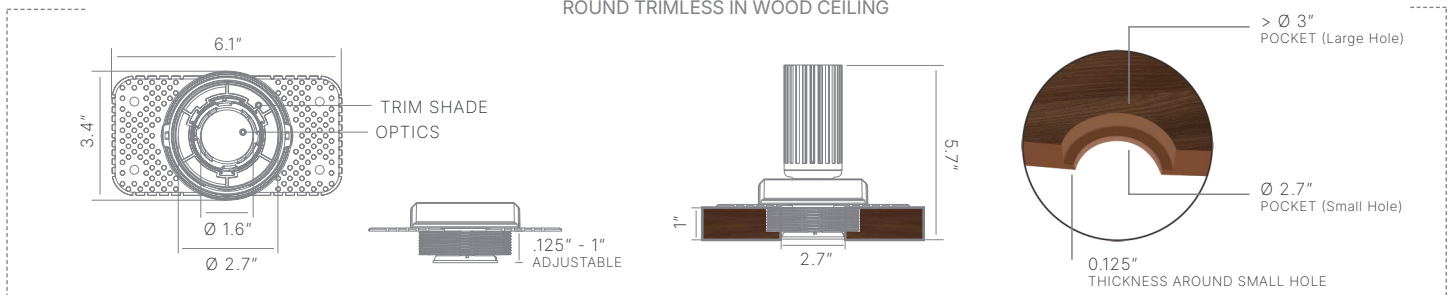

SQUARE TRIMLESS IN WOOD CEILING




3" DLA SERIES

ARCHITECTURAL DOWNLIGHT

VALRIYA
SPEC GRADE COMMERCIAL LED LIGHTING

MOUNTING

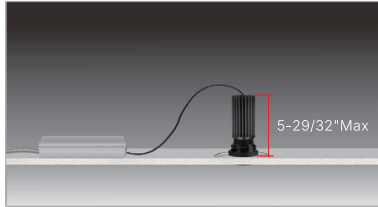


CAN BE INSTALLED IN EXISTING CEILING

REMODEL (INSTALL FROM BELOW)

REMOTE DRIVER BOX


1 FIXTURE PER REMOTE DRIVER




CONDUIT PROVIDED BY OTHERS

MOUNTING SPACE REQUIRED

UP TO 10W:




UP TO 19W:





NEW CONSTRUCTION (INSTALL FROM ABOVE)


FRAME KIT (NON-IC)





HOUSING INSULATION KIT (IC)





3" ROUND TRIM




3" ROUND TRIMLESS




3" SQUARE TRIM




3" SQUARE TRIMLESS



PHOTOMETRICS 10W / 3000K / 60°

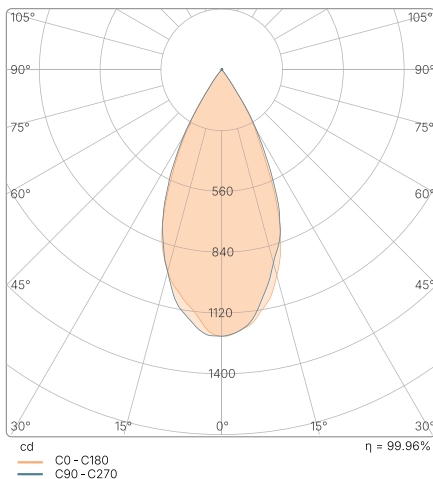

FIXED CCT 27K / 30K / 35K / 40K / 90+ CRI

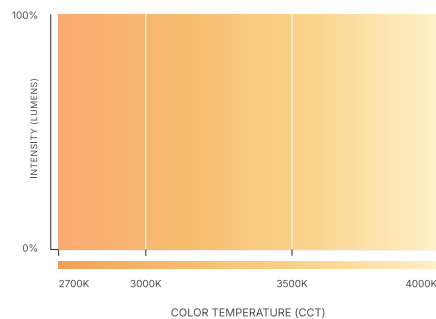

DIM TO WARM 3000K-2000K / 95+ CRI

