

# EDB SERIES

## LOW VOLTAGE EMERGENCY DRIVER


The EDB Series features a split battery design, allowing for custom installation into a variety of fixture types including linearighbays, wraparounds, and strip lighting. Comes standard with an IP65 test button.

- Minimum 90min. operating time
- Test button can be mounted into any location
- High efficiency charging system
- UL Field Install, CEC Listed

### TECHNICAL DETAILS

INPUT VOLTAGE	100-277VAC
OUTPUT VOLTAGE	25-50V DC
MOUNTING	Surface
WEIGHT	2.5lbs
OPERATING TEMPERATURE	32°F to 122°F
BATTERY TYPE	Li-ion
RECHARGE TIME	24 Hours
MATERIAL	Aluminum Shell
WARRANTY	5 Year
CERTIFICATIONS	UL Field Install, CEC

### DIMENSIONS

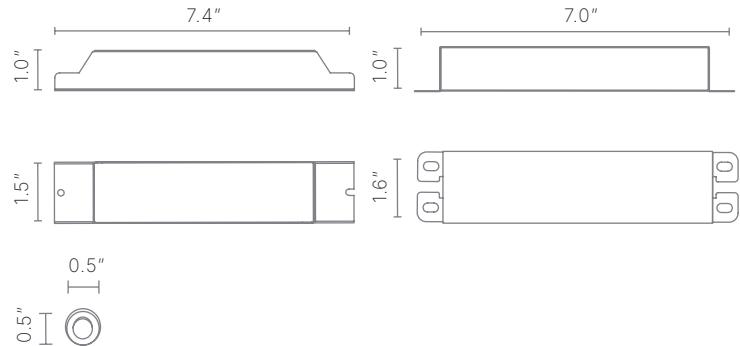

### ORDERING GUIDE

VA-EDB	_____	50
	POWER	OUTPUT VOLTAGE
[LI08]	8 Watts	[50] 25-50V DC
[LI15]	15 Watts	
[LI25]	25 Watts	
[LI30]	30 Watts	

Example: VA-EDB-LI15-50

# EDB SERIES


## LOW VOLTAGE EMERGENCY DRIVER

VALRIYA  
SPEC GRADE COMMERCIAL LED LIGHTING

### WIRING DIAGRAMS

#### <120W DRIVER

External battery not shown (Must be connected with supplied 3 pin connector)

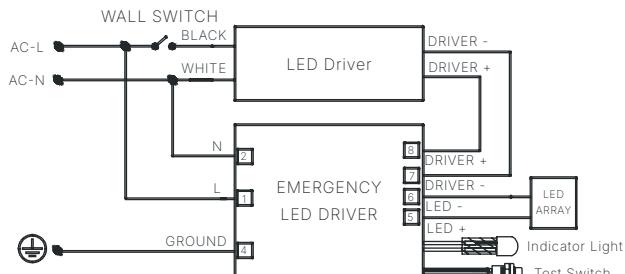

#### >120W DRIVER

External battery not shown (Must be connected with supplied 3 pin connector)

