

CLIENT	
PROJECT	
NOTES	

EL1 SERIES EMERGENCY LIGHT

The EL1 Series features an a high output and battery backup option. With two fully adjustable, glare-free LED lighting heads.

- 3.6V 1000mAh or 6V 4.5mAh battery
- Universal mounting plate with quick-connect feature
- Injection molded, impact and UV-stabilized UL 94 V-0 thermoplastic housing
- Universal J-Box mounting pattern
- UL cUL listed, Meets or exceeds all requirements in NFPA 101 Safety Code




TECHNICAL DETAILS



BACKUP BATTERY	3.6V 1000mAh, 6V 4.5mAh
VOLTAGE	120VAC / 277VAC
WEIGHT	See Dimensions
MOUNTING	Flush Mount, Wall
OPERATING TEMPERATURE	32°F to 104°F
WARRANTY	1 Year
LOCATION	Dry
CERTIFICATIONS	UL, cUL, NFPA 101

DIMENSIONS

REGULAR / 1lbs

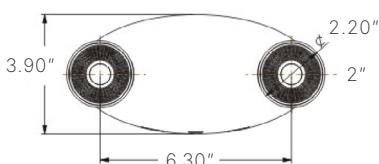

HIGH OUTPUT / 3lbs

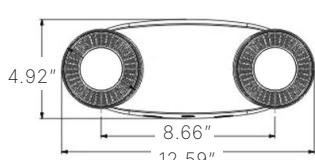

ORDERING GUIDE

VA-EL1	W	BB	
HOUSING	OPERATION	OPTIONS	
[W] White	[BB] Battery Backup	[HO] High Output - 650 Lumens	

Example: VA-EL1-W-BB

EMERGENCY OPERATION

Upon failure of the normal utility power, an internal solid state transfer switch automatically provides uninterrupted emergency operation for at least 90 minutes. The fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

BATTERY BACKUP

The EL1 Series is designed with maintenance-free 3.6V 1000mAh NiCad battery that provides a minimum emergency duration of 90 minutes. Recharge time of the battery is 24 hours. High Output model designed with 6V 4.5mAh sealed lead acid battery.