



ESJR SERIES

EXIT LIGHT


The ESJR Series offers a compact, modern design and combines the dependability of LED lighting illumination for an attractive and economical package.

- UL 924, NEC, NFPA 101 Life Safety Code
- Damp location listed
- Injection-molded VO flame retardant, high-impact housing
- Charge rate / power on LED indicator light
- Universal mounting canopy for top or side installation

TECHNICAL DETAILS

BACKUP BATTERY	NiCad 1.2V 1000mAh or 3.6V 1000mAh
VOLTAGE	120VAC / 277VAC
WEIGHT	5lbs.
MOUNTING	Wall, Ceiling
REMOTE HEAD	ERH Series & ORH Series
OPERATING TEMP	68°F to 86°F
WARRANTY	1 Year
LOCATION	Damp
CERTIFICATIONS	UL 924, NEC, NFPA101

DIMENSIONS

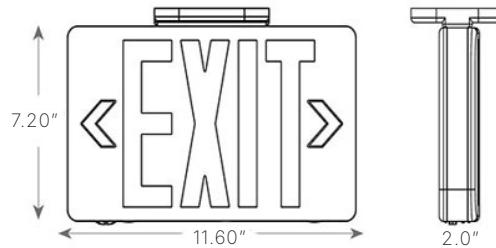

ORDERING GUIDE

VA-ESJR	—	<input type="text"/>	—	<input type="text"/>	—	<input type="text"/>
		LETTER COLOR		HOUSING		OPERATION
		[R] Red [G] Green		[B] Black [W] White		[BB] Battery Backup [RH] Remote head capable

Example: VA-ESJR-R-W-BB

EMERGENCY OPERATION

Upon failure of the normal utility power, an internal solid state transfer switch automatically provides uninterrupted emergency operation for at least 90 minutes. The fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

BATTERY BACKUP

The ESJR Series is designed with a maintenance-free 1.2V 1000mAh NiCad battery (Battery Backup Models) or a 3.6V 1800mAh battery (Remote Head Capable Models) that provides a minimum emergency duration of 90 minutes. Recharge time of the battery is 24 hours.