

CLIENT
PROJECT
NOTES



ESJR-U SERIES

ADJUSTABLE EXIT LIGHT

The ESJR-U Series offers a compact, modern design and combines the dependability of LED lighting illumination for an attractive and economical package.


- UL 924, NEC, NFPA 101 Life Safety Code
- Damp location listed
- Injection-molded VO flame retardant, high-impact housing
- Charge rate / power on LED indicator light
- Universal mounting canopy for top or side installation



TECHNICAL DETAILS

BACKUP BATTERY	Ni-MH 1.2V 1000mAh
VOLTAGE	120VAC / 277VAC
WEIGHT	5lbs.
MOUNTING	Wall, Side, Top
REMOTE HEAD	ERH Series & ORH Series
OPERATING TEMP	32°F to 104°F
WARRANTY	1 Year
LOCATION	Damp
CERTIFICATIONS	UL 924, NEC, NFPA101

DIMENSIONS

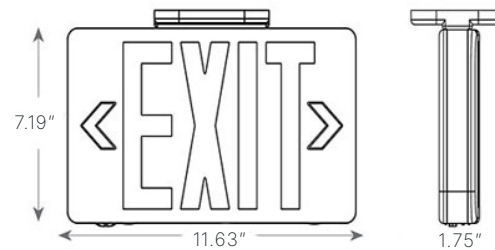

ORDERING GUIDE

VA-ESJR	U	W	BB
	LETTER COLOR	HOUSING	OPERATION
	[U] Red	[W] White	[BB] Battery Backup

Example: VA-ESJR-U-W-BB

EMERGENCY OPERATION

Upon failure of the normal utility power, an internal solidstate transfer switch automatically provides uninterrupted emergency operation for at least 90 minutes. The fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

BATTERY BACKUP

The ESJR-U Series is designed with a maintenance-free 1.2V 1000mAh Ni-MH battery that provides a minimum emergency duration of 90 minutes. Recharge time of the battery is 24 hours.