

ESL SERIES

LED EXIT LIGHT

The ESL Series combines a low profile traditional design and dependable LED lighting illumination for an attractive and affordable solution.


- UL 924, NEC, NFPA 101 Life Safety Code
- Damp location rated
- 120 or 277 VAC operation
- Injection molded VO flame retardant, high impact housing
- Universal mounting canopy for top or side installation



TECHNICAL DETAILS

BACKUP BATTERY	Ni-Cad 4.8V 700mAh
VOLTAGE	120VAC, 277VAC
WEIGHT	5.0lbs.
MOUNTING	Wall, Side, Top
OPERATING TEMP	68°F to 86°F
WARRANTY	1 Year
LOCATION	Damp
CERTIFICATIONS	UL 924, NEC, NFPA101

DIMENSIONS

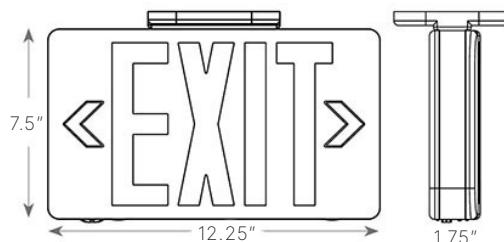

ORDERING GUIDE

VA-ESL	_____	_____	_____	_____	_____
	LETTER COLOR	HOUSING	OPERATION	OPTIONS	
	[R] Red [G] Green	[W] White [B] Black	[BB] Battery Backup [ST] Self Testing [AC] AC Only [DC] Dual Circuit ¹	[USA] Assembled in the USA [SV] 220/50Hz Special Voltage [ULC] UL Canada [3F] 3ft Cord	

¹ Not available with options

Example: VA-ESL-R-W-BB

EMERGENCY OPERATION

Upon failure of the normal utility power, an internal solid-state transfer switch automatically provides uninterrupted emergency operation for at least 90 minutes. The fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

BATTERY BACKUP

The ESL Series is designed with a maintenance-free 4.8V 700mAh NiCad battery that provides a minimum emergency duration of 90 minutes. Recharge time of the battery is 24 hours.