

CLIENT
PROJECT
NOTES



ESL-U SERIES

ADJUSTABLE EXIT LIGHT

The ESL-U Series combines a low profile traditional design and dependable LED lighting illumination for an attractive and affordable solution.


- UL 924, NFPA 101, NFPA 70 Life Safety Code
- Damp location rated
- 120 / 277 VAC operation
- Injection molded VO flame retardant, high impact housing
- Universal mounting canopy for top or side installation



TECHNICAL DETAILS

BACKUP BATTERY	Ni-Cad 3.6V 300mAh
VOLTAGE	120 / 277VAC
WEIGHT	5.0lbs.
MOUNTING	Wall, Side, Top
OPERATING TEMP	50°F to 104°F
WARRANTY	1 Year
LOCATION	Damp
CERTIFICATIONS	UL 924, NFPA101, NFPA70

DIMENSIONS

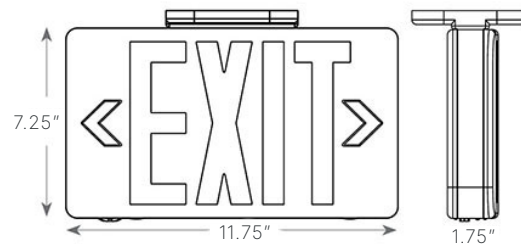

ORDERING GUIDE

VA-ESL	U			
	LETTER COLOR	HOUSING	OPERATION	OPTIONS
	[U] Red / Green	[W] White [B] Black	[BB] Battery Backup [ST] Self Testing [AC] AC Only [DC] Dual Circuit	[3F] 3ft Cord

Example: VA-ESL-U-B-BB

EMERGENCY OPERATION

Upon failure of the normal utility power, an internal solid-state transfer switch automatically provides uninterrupted emergency operation for at least 90 minutes. The fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

BATTERY BACKUP

The ESL-U Series is designed with a maintenance-free 3.6V 300mAh NiCad battery that provides a minimum emergency duration of 90 minutes. Recharge time of the battery is 24 hours.