


ESRM SERIES ADJUSTABLE EXIT LIGHT

The ESRM Series features a field-selectable color, allowing you to switch effortlessly between red and green. Design for maximum flexibility with an adjustable angle for optimal visibility.


- Recessed mounting
- Field installable arrows
- Aluminum housing with a high grade acrylic face
- Dual 120/277V operation
- UL 924, NEC, OSHA, NFPA 101 Life Safety Code
- Damp location

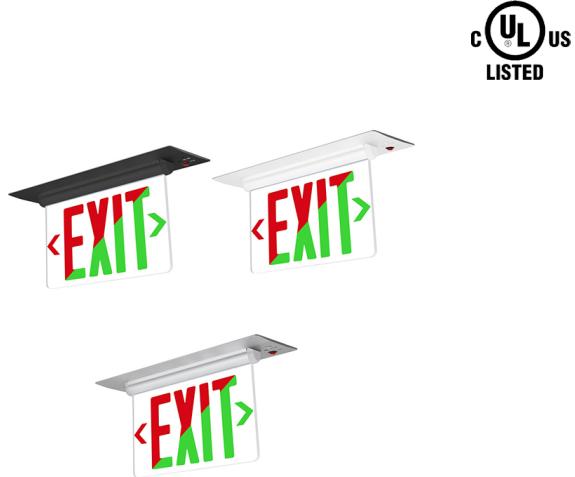


TECHNICAL DETAILS

BACKUP BATTERY	4.8V NiCad Battery
VOLTAGE	120/277VAC
WEIGHT	5lbs.
MOUNTING	Recessed
OPERATING TEMPERATURE	32°F to 104°F
WARRANTY	1 Year
LOCATION	Damp
CERTIFICATIONS	UL924, NEC, OSHA, NFPA 101

DIMENSIONS

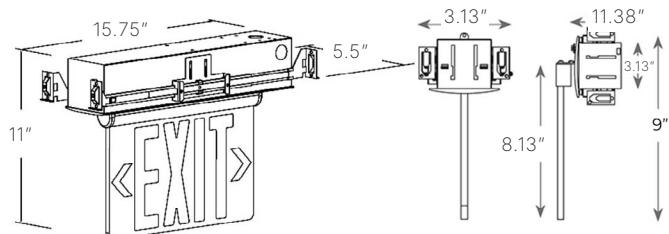

ORDERING GUIDE

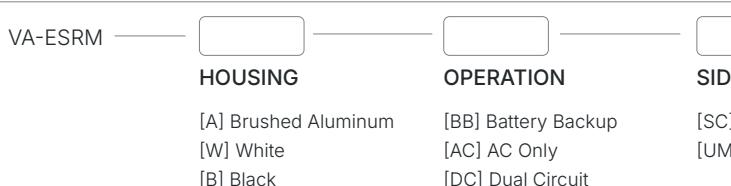

Example: VA-ESRM-A-DC-SC

EMERGENCY OPERATION

Upon failure of the normal utility power, an internal solidstate transfer switch automatically provides uninterrupted emergency operation for at least 90 minute s. The fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

BATTERY BACKUP

The ESRM Series is designed with a 4.8 Volt maintenance-free NiCad battery. The battery is protected by a low voltage cut-off circuit.