



SPEC GRADE COMMERCIAL LED LIGHTING

CLIENT
PROJECT
NOTES

EST SERIES

EXIT LIGHT



The EST Series features an injection-molded, high-impact, UL94 v-0 thermoplastic construction. With a universal mounting pattern knock-out in the back plate for J-Box mounting.


- 1.2V 1000mAh NiMH battery
- Knock-out left/right arrows
- Innovative and easy installation in minutes
- Test switch and charge indicator
- UL cUL listed
- Damp location



TECHNICAL DETAILS

BACKUP BATTERY	1.2V 1000mAh NiMH Battery
VOLTAGE	120VAC / 277VAC
WEIGHT	5lbs.
MOUNTING	Surface wall, Side, Top
OPERATING TEMPERATURE	32°F to 104°F
WARRANTY	1 Year
LOCATION	Damp
CERTIFICATIONS	UL, cUL

DIMENSIONS

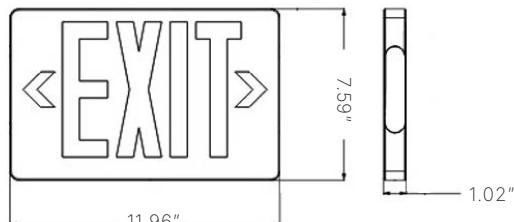

ORDERING GUIDE



Example: VA-EST-R-W-BB-S

EMERGENCY OPERATION

Upon failure of the normal utility power, an internal solidstate transfer switch automatically provides uninterrupted emergency operation for at least 90 minutes. The fully automatic solid-state, two-rate charger initiates recharging a discharged battery within 24 hours.

BATTERY BACKUP

The EST Series is designed with a maintenance-free 1.2V 1000mAh NiMH battery that provides an emergency duration of 90 minutes. Recharge time of the battery is 24 hours.