

FLAD SERIES

ADJUSTABLE FLOOD LIGHT

The FLAD Series features efficiency and flexibility. Featuring Wattage and CCT adjustability, the FLAD series is available in 3 different sizes achieving up to 161lm/w. Ideal for courtyards, driveways, buildings, and billboards.

- Adjustable color temperature & power output
- 7Hx7V NEMA optic
- Die-cast aluminum for superior heat dissipation
- Included photocell

TECHNICAL DETAILS

POWER SMALL	15W, 27W
POWER MEDIUM	40W, 65W
POWER LARGE	90W, 120W
COLOR TEMPERATURE	3000K / 4000K / 5000K
CRI	70+ CRI
VOLTAGE	120-277VAC
EFFICIENCY	Up to 161lm/w
DIMMING	1-10V
LUMENS	Up to 19,000lm
HOUSING	Die-Cast Aluminum
MOUNTING	Trunnion, Slipfitter, Knuckle, Yoke
OPERATING TEMPERATURE	-40°F to 104°F
WARRANTY	5 Years
FINISH	Dark Bronze
LOCATION	Wet
CERTIFICATIONS	UL, IP65

CLIENT

PROJECT

NOTES



LUMENS 4000K

SMALL	15W	27W
	2,300lm	3,800lm
MEDIUM	40W	65W
	6,000lm	9,700lm
LARGE	90W	120W
	14,500lm	19,000lm

L70: 50,000+ HOURS



FLAD SERIES

ADJUSTABLE FLOOD LIGHT


VALRIYA
SPEC GRADE COMMERCIAL LED LIGHTING

ORDERING GUIDE

Example: VA-FLAD-LV40-ADJ-TR

VA-FLAD	LV		ADJ	
	VOLTAGE	SIZE / POWER	CCT	MOUNT
	[LV] 120-277VAC	[15] Small - 6W / 10W / 12W / 15W [27] Small - 11W / 15W / 20W / 27W [40] Medium - 14W / 22W / 30W / 40W [65] Medium - 27W / 41W / 54W / 65W [90] Large - 33W / 50W / 67W / 90W [120] Large - 52W / 71W / 98W / 120W	[ADJ] Adjustable CCT 30K / 40K / 50K	[TR] Trunnion ¹ [KN] Knuckle ¹ [YK] Yoke ² [SP] Slipfitter ²
¹ Only available for Small & Medium models		² Only available for Large models		

DIMENSIONS

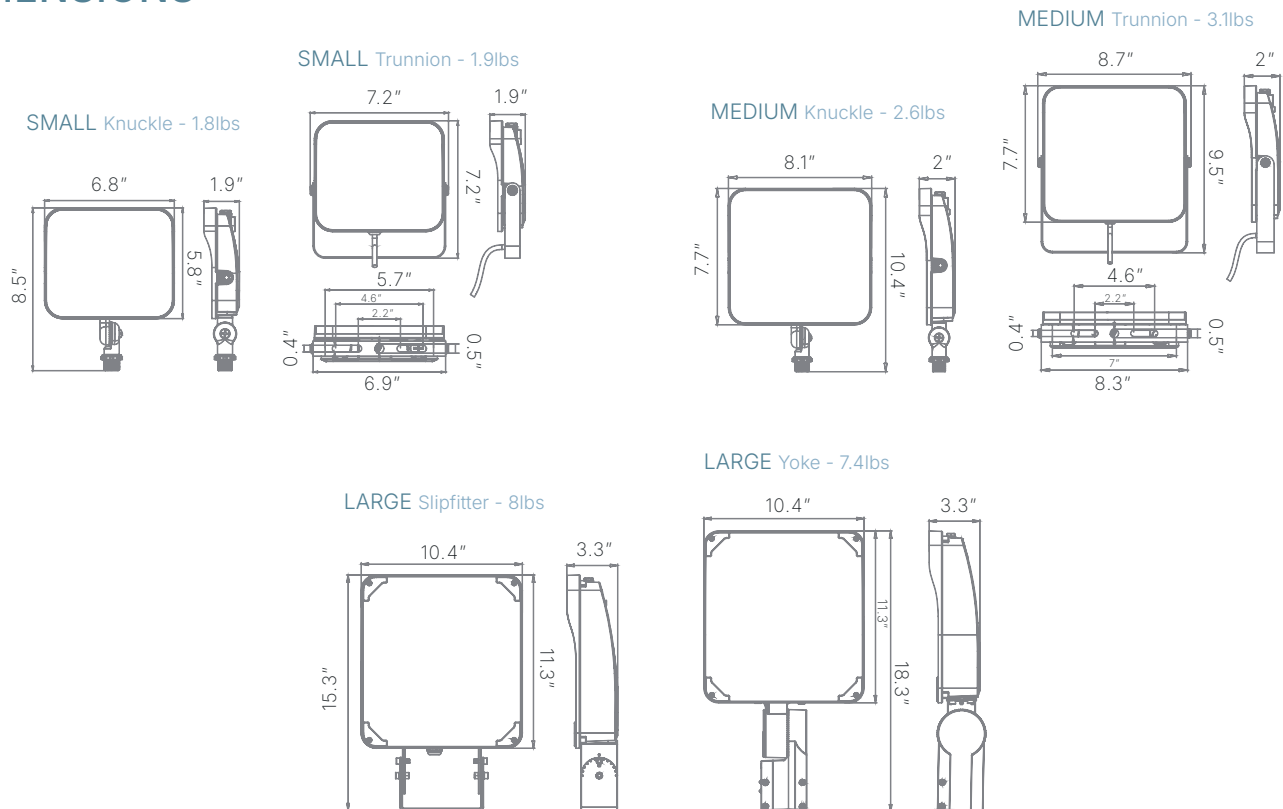

FLAD SERIES

ADJUSTABLE FLOOD LIGHT

VALRIYA
SPEC GRADE COMMERCIAL LED LIGHTING

SKU	WATTAGE	SETTING	CCT	LUMENS	VOLTAGE	DLC	QUICK SHIP
VA-FLAD-LV15-35A-X-XX	16.3W	100%	5000K	2,266	120-277VAC	Pending	Yes
VA-FLAD-LV15-35A-X-XX	12.63W	80%	5000K	1,790	120-277VAC	Pending	Yes
VA-FLAD-LV15-35A-X-XX	10.02W	60%	5000K	1,455	120-277VAC	Pending	Yes
VA-FLAD-LV15-35A-X-XX	6.15W	40%	5000K	943	120-277VAC	Pending	Yes
VA-FLAD-LV27-35A-X-XX	27.23W	100%	5000K	3,672	120-277VAC	Pending	No
VA-FLAD-LV27-35A-X-XX	20.4W	80%	5000K	2,856	120-277VAC	Pending	No
VA-FLAD-LV27-35A-X-XX	15.52W	60%	5000K	2,234	120-277VAC	Pending	No
VA-FLAD-LV27-35A-X-XX	11.4W	40%	5000K	1,690	120-277VAC	Pending	No
VA-FLAD-LV40-35A-X-XX	39.9W	100%	5000K	5,846	120-277VAC	Pending	Yes
VA-FLAD-LV40-35A-X-XX	29.5W	80%	5000K	4,542	120-277VAC	Pending	Yes
VA-FLAD-LV40-35A-X-XX	21.94W	60%	5000K	3,356	120-277VAC	Pending	Yes
VA-FLAD-LV40-35A-X-XX	14.3W	40%	5000K	2,327	120-277VAC	Pending	Yes
VA-FLAD-LV65-35A-X-XX	65.5W	100%	5000K	9,438	120-277VAC	Pending	Yes
VA-FLAD-LV65-35A-X-XX	54.3W	80%	5000K	7,824	120-277VAC	Pending	Yes
VA-FLAD-LV65-35A-X-XX	41.2W	60%	5000K	5,937	120-277VAC	Pending	Yes
VA-FLAD-LV65-35A-X-XX	27.5W	40%	5000K	3,963	120-277VAC	Pending	Yes
VA-FLAD-LV90-35A-X-XX	94.35W	100%	5000K	13,982	120-277VAC	Pending	No
VA-FLAD-LV90-35A-X-XX	67.9W	80%	5000K	10,535	120-277VAC	Pending	No
VA-FLAD-LV90-35A-X-XX	50.9W	60%	5000K	8,144	120-277VAC	Pending	No
VA-FLAD-LV90-35A-X-XX	33W	40%	5000K	5,490	120-277VAC	Pending	No
VA-FLAD-LV120-35A-X-XX	122.9W	100%	5000K	18,092	120-277VAC	Pending	No
VA-FLAD-LV120-35A-X-XX	98.82W	80%	5000K	15,119	120-277VAC	Pending	No
VA-FLAD-LV120-35A-X-XX	71.28W	60%	5000K	11,206	120-277VAC	Pending	No
VA-FLAD-LV120-35A-X-XX	52.8W	40%	5000K	8,581	120-277VAC	Pending	No

PHOTOMETRICS 40W / 5000K

