

LHBA SERIES

LINEAR HIGHBAY


The LHBA Series is a high-efficiency fixture with up to 150lm/w, suitable for warehouse, retail, and industrial type applications. Featuring changeable optics and an included hanging kit.

- Included 6ft hanging kit with optional pendant and surface mounting
- Optional wireless motion, daylight sensor, and EM integration available
- Damp location rated
- UL, NOM, DLC® Standard

TECHNICAL DETAILS

POWER 2FT	75W, 100W, 150W
POWER 4FT	200W, 240W, 300W, 400W
COLOR TEMPERATURE	3000K, 3500K, 4000K, 5000K
CRI	80+ CRI
VOLTAGE	120-277VAC, 347-480VAC
EFFICIENCY	Up to 150lm/w
DIMMING	0-10V
LUMENS	Up to 59,000lm
HOUSING	Aluminum
MOUNTING	Suspension, Surface, Pendant
OPERATING TEMPERATURE	14°F to 104°F
WARRANTY	5 Years
FINISH	White
LOCATION	Damp
CERTIFICATIONS	UL, NOM, DLC® Standard

DIMENSIONS

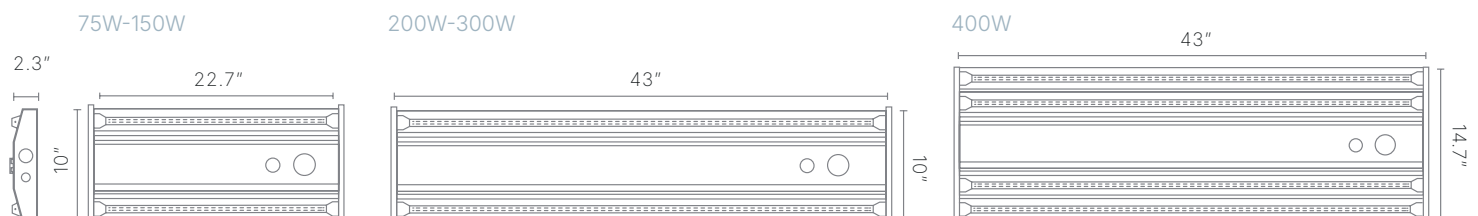

CLIENT
PROJECT
NOTES



LUMENS 5000K

2FT	75W	100W	150W	
	10,875lm	14,500lm	22,500lm	
4FT	200W	240W	300W	400W
	30,000lm	36,000lm	44,100lm	59,000lm

L70: 50,000+ HOURS

WEIGHT

2FT	75W	100W	150W	
	6.8lbs	6.8lbs	7.3lbs	
4FT	200W	240W	300W	400W
	11.9lbs	12.6lbs	14.3lbs	18.5lbs

LHBA SERIES

LINEAR HIGHBAY

VALRIYA
SPEC GRADE COMMERCIAL LED LIGHTING

ORDERING GUIDE

Example: VA-LHBA-LV100-30-120-E

VA-LHBA	VOLTAGE	SIZE / POWER	CCT	BEAM ANGLE	OPTIONS
	[LV] 120-277VAC [HV] 347-480VAC ²	[75] 2ft / 75W [100] 2ft / 100W [150] 2ft / 150W [200] 4ft / 200W [240] 4ft / 240W [300] 4ft / 300W [400] 4ft / 400W	[30] 3000K ² [35] 3500K ² [40] 4000K [50] 5000K	[120] 120° [90] 90° [59] 50°90°	[E] 15W EM Driver, CEC Listed ¹ [S] Microwave / PIR Sensor [ES] EM + Sensor

¹ Consult factory for other EM options ² Consult factory for lead times

ACCESSORIES*


SKU	DESCRIPTION
VA-LHBA-2-WG	Wireguard Kit for 2ft Optics
VA-LHBA-4-WG	Wireguard Kit for 4ft Optics
VA-LHBA-SMB	Surface Mount Kit (2ft / 4ft Models)
BRI823	Wireless Occ + Daylight Sensor
ANT-6-4T	Wireless Occ + Daylight Harvesting
RC100	Wireless Programmable Remote (BRI823)
MC054V RC4 D	Wireless Occ + Daylight Harvesting
MH10	Wireless Remote (MC054V)




*Items must be ordered separately

PHOTOMETRICS

300W / 5000K / 50°90°

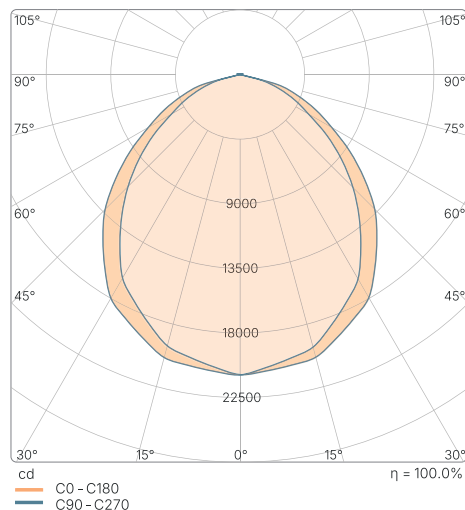

300W / 5000K / 90°

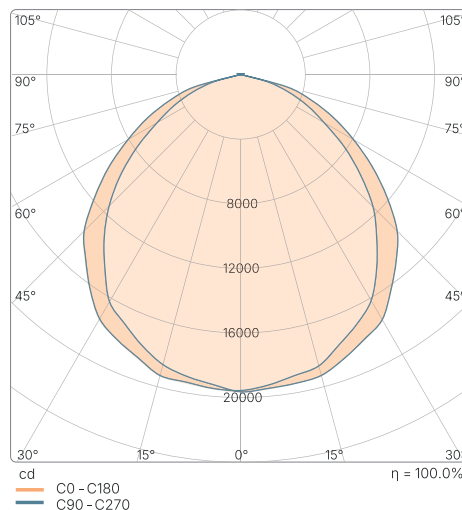

300W / 5000K / 120°

