



SPEC GRADE COMMERCIAL LED LIGHTING

CLIENT
PROJECT
NOTES

MEL SERIES

MINI EMERGENCY LIGHT

The MEL Series combines traditional emergency lighting and energy efficient LED performance for a maintenance free light. Featuring a new modern mini design.


- UL 924, NEC, OSHA, NFPA 101 Life Safety Code
- Indoor damp location rated
- Two fully adjustable LED lamp heads
- LED indicator light with push-to-test switch
- Universal mounting plate
- Innovative, easy installation in minutes

TECHNICAL DETAILS

BACKUP BATTERY	Ni-Cad 3.6V 1000mAh
VOLTAGE	120VAC / 277VAC
WEIGHT	2lbs.
MOUNTING	Wall, Ceiling
OPERATING TEMP	32°F to 104°F
WARRANTY	1 Year
LOCATION	Damp
CERTIFICATIONS	cUL, UL 924, NEC, NFPA101



DIMENSIONS

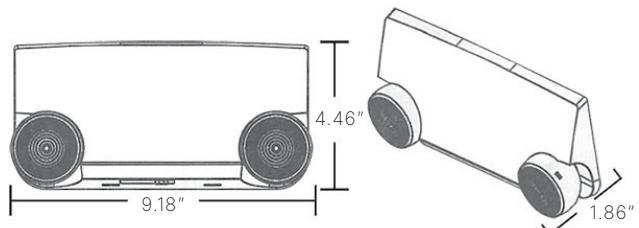

ORDERING GUIDE



Example: VA-MEL-W-BB

EMERGENCY OPERATION

Upon failure of the normal utility power, an internal solidstate transfer switch automatically provides uninterrupted emergency operation for at least 90 minutes. The fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

BATTERY BACKUP

The MEL Series is designed with a maintenance-free 3.6V 1000mAh Ni-Cd battery that provides a minimum emergency duration of 90 minutes. Recharge time of the battery is 24 hours.