

RHBB SERIES

ROUND HIGHBAY


The RHBB Series features an aluminum alloy heat sink for superior heat dissipation, performance, and weight. IP65 rated, suitable for both warehouse and industrial type applications.

- Available in white and custom order black
- Equipped with a 6ft AC power cord
- 100° aluminum reflector or 70° polycarbonate reflector available
- UL, NOM, IP65, DLC® Standard

TECHNICAL DETAILS

POWER	100W, 150W, 200W
COLOR TEMPERATURE	3000K, 4000K, 5000K
CRI	80+ CRI
VOLTAGE	120-277VAC
EFFICIENCY	Up to 150lm/w
DIMMING	1-10V
LUMENS	Up to 30,000lm
BEAM ANGLE	120° Standard
HOUSING	Aluminum Alloy
MOUNTING	Suspension, Surface
OPERATING TEMPERATURE	-40°F to 113°F
WARRANTY	5 Years
FINISH	White
LOCATION	Damp
CERTIFICATIONS	UL, NOM, IP65, DLC® Standard

DIMENSIONS

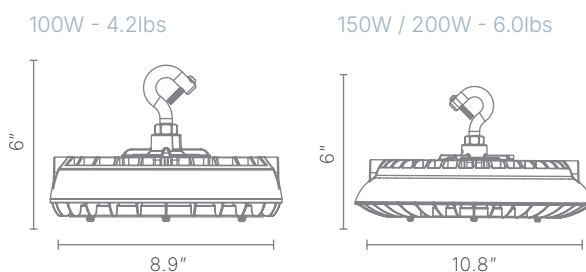

CLIENT
PROJECT
NOTES




LUMENS 5000K


100W	150W	200W
14,800lm	22,650lm	30,000lm

L70: 50,000+ HOURS

ALUMINUM REFLECTOR

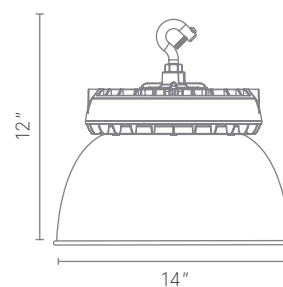

PC REFLECTOR

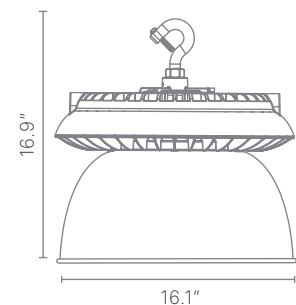

RHBB SERIES

ROUND HIGHBAY

VALRIYA
SPEC GRADE COMMERCIAL LED LIGHTING

ORDERING GUIDE

Example: VA-RHBB-LV200-50

VA-RHBB		
	POWER	CCT
	[LV100] 100W	[30] 3000K ¹
	[LV150] 150W	[40] 4000K
	[LV200] 200W	[50] 5000K

¹ Consult factory for lead times

ACCESSORIES*

SKU	DESCRIPTION
VA-RHBB-FL	Frosted Lens
VA-RHBB-ALR	Aluminum Reflector (100°)
VA-RHBB-ALS	Aluminum Reflector Shield
VA-RHBB-PCR	PC Reflector (70°)
VA-RHBB-PCS	PC Reflector Shield
VA-RHBB-JB	Junction Box
VA-RHBB-SSMB	Surface Mount Bracket (Small)
VA-RHBB-LSMB	Surface Mount Bracket (Large)
VA-RHBB-WG	Wire Guard (Below Lens)
VA-RHBB-WG-PCR	Wire Guard (Below PC Reflector)
MC054V RC A	Wireless Occ + Daylight Sensor
MH10	Wireless Remote (MC054V)
VA-EDUB-HY25-170	25W Driver 120-277VAC In / 170VDC Out



*Items must be ordered separately

PHOTOMETRICS 200W / 5000K

