

RHBC SERIES

ADJUSTABLE HIGHBAY

The RHBC Series features a die-cast aluminum housing and a 4-way adjustable power output with a 2 way adjustable CCT. Ideal for warehouse, manufacturing, and stadium applications.


- Available in white and custom order black
- Equipped with a 6ft AC power cord
- Corrosion resistant powder coating
- UL, TAA

TECHNICAL DETAILS


POWER	100W, 150W, 210W, 230W
COLOR TEMPERATURE	4000K / 5000K
CRI	70+ CRI
VOLTAGE	120-277VAC
EFFICIENCY	Up to 180lm/w
DIMMING	0-10V
LUMENS	Up to 35,000lm
HOUSING	Die-Cast Aluminum
MOUNTING	Suspended, Surface
OPERATING TEMPERATURE	-40°F to 113°F
WARRANTY	5 Years
FINISH	White, Black
LOCATION	Wet
CERTIFICATIONS	UL, TAA

DIMENSIONS

100W / 150W

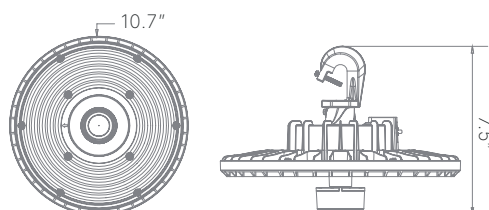

210W / 230W

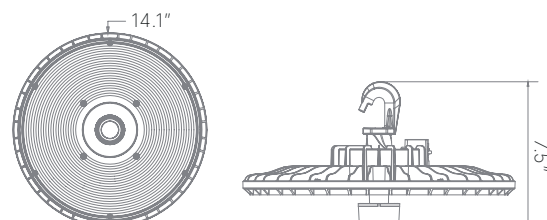

CLIENT

PROJECT

NOTES



LUMENS 5000K

100W	40W	60W	80W	100W
	6,500lm	9,400lm	12,000lm	14,500lm
150W	60W	90W	120W	150W
	10,000lm	14,600lm	19,000lm	22,500lm
210W	84W	126W	168W	210W
	14,000lm	20,000lm	25,000lm	30,500lm
230W	92W	138W	184W	230W
	16,000lm	23,000lm	29,000lm	35,000lm

L70: 50,000+ HOURS

RHBC SERIES

ADJUSTABLE HIGHBAY

VALRIYA
SPEC GRADE COMMERCIAL LED LIGHTING

ORDERING GUIDE

Example: VA-RHBC-LV100-45A-W-ES


VA-RHBC	LV		45A		
	VOLTAGE		CCT	FINISH	OPTIONS
	[LV] 120-277VAC	[100] 40W / 60W / 80W / 100W [150] 60W / 90W / 120W / 150W [210] 84W / 126W / 168W / 210W [230] 92W / 138W / 184W / 230W	[45A] Adjustable CCT	[W] White [B] Black	[E] EM Battery [S] Sensor [ES] EM + Sensor

ACCESSORIES*

SKU	DESCRIPTION
VA-EDUA-LI25-170	25W Driver 120-277VAC In / 170VDC Out
MSANT12VPH01	PIR Sensor
MSANT12VMH01	Microwave Sensor
VA-RHBC-AR	Aluminum Reflector
VA-RHBC-PR	PC Reflector
VA-RHBC-UB	U-Bracket

*Items must be ordered separately

ACCESSORIES

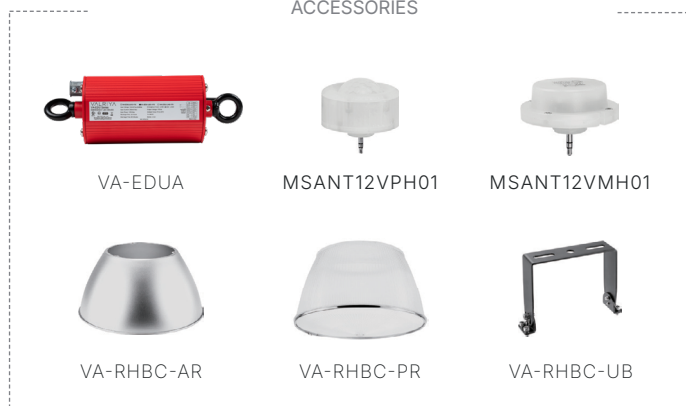

PHOTOMETRICS 150W / 4000K

