

VT SERIES

VAPOR TIGHT



The VT Series is a durable IP66 rated vapor tight fixture with (10) 7/8" knock-outs. Ideal for parking garages, utility, car wash, elevator shaft, and stairwell applications. Comes standard with stainless steel clips, tamper-proof hardware and mounting accessories.

- High efficiency 130lm/w fixture
- Optional integrated EM driver and/or motion sensor available
- Premium LEDs providing a crisp CRI
- ETL, DLC® Standard

TECHNICAL DETAILS

POWER	40W, 60W
COLOR TEMPERATURE	3000K, 3500K, 4000K, 5000K
CRI	80+ CRI
VOLTAGE	120-277VAC
EFFICIENCY	130lm/w
DIMMING	0-10V
LUMENS	Up to 7,800lm
HOUSING	Performance Plastic
MOUNTING	Surface, Suspended
OPERATING TEMPERATURE	14°F to 104°F
WARRANTY	5 Years
FINISH	White
LOCATION	Wet
CERTIFICATIONS	ETL, IP66, DLC® Standard

DIMENSIONS 5.2lbs



CLIENT

PROJECT

NOTES



LUMENS 5000K

40W	60W
5,200lm	7,800lm

L70: 50,000+ HOURS

VT SERIES

VAPOR TIGHT

VALRIYA
SPEC GRADE COMMERCIAL LED LIGHTING

ORDERING GUIDE

Example: VA-VT-4-40-50-E


VA-VT	4			
	SIZE	POWER	CCT	OPTIONS
	[4] 4ft	[40] 40 Watts [60] 60 Watts	[30] 3000K ¹ [35] 3500K ¹ [40] 4000K [50] 5000K	[E] 8W EM Driver, CEC Listed [S] Occ. Sensor [ES] EM + Sensor

¹ Not DLC® Listed



ACCESSORIES*

SKU	DESCRIPTION
MC077V RC	Wireless Occ Sensor
MH10*	Wireless Remote (MC077V RC)
VA-CSK*	Chain Suspension kit (4ft)
VA-EDM-LP08-058	8W Emergency Battery

*Items must be ordered separately

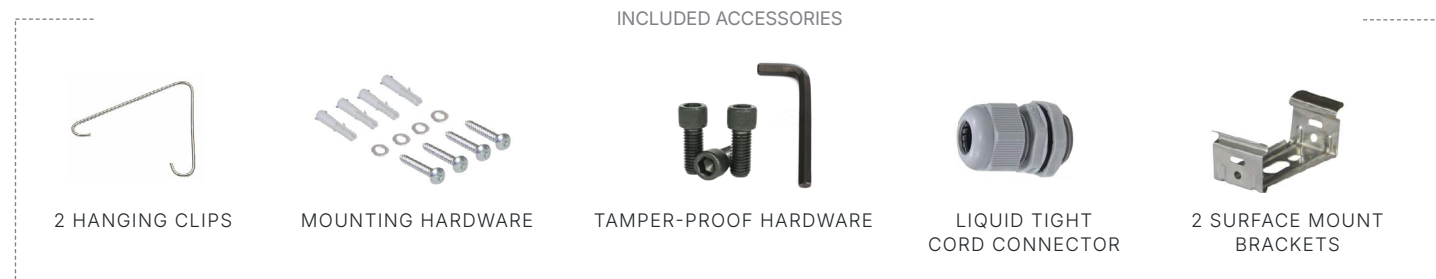

PHOTOMETRICS 60W / 5000K

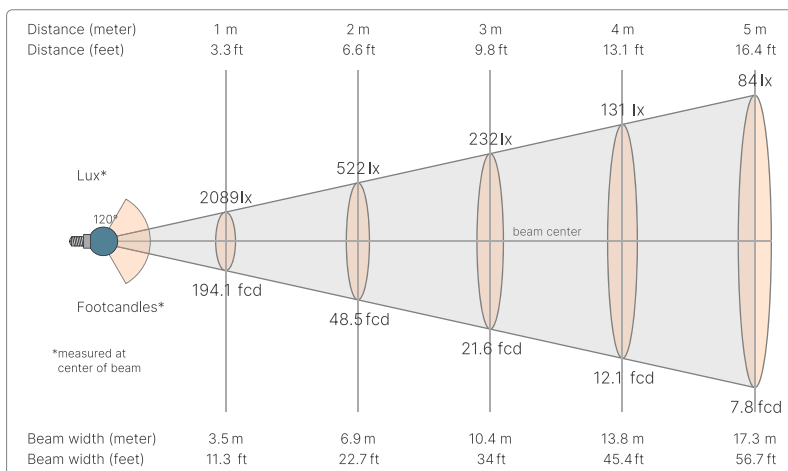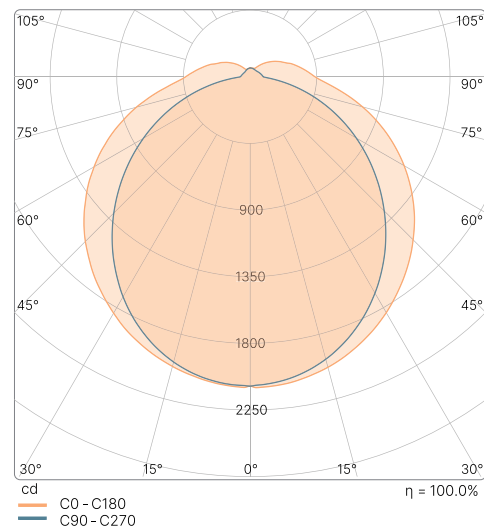

VT SERIES

VAPOR TIGHT

VALRIYA
SPEC GRADE COMMERCIAL LED LIGHTING

SKU	WATTS	CCT	LUMENS	CRI	VOLTAGE ¹	OPTIONS	DLC	QUICK SHIP
VA-VT-4-40-30	40W	3000K	5200	80+	120-277VAC	None	No	Yes
VA-VT-4-40-35	40W	3500K	5200	80+	120-277VAC	None	No	Yes
VA-VT-4-40-40	40W	4000K	5200	80+	120-277VAC	None	Standard	Yes
VA-VT-4-40-50	40W	5000K	5200	80+	120-277VAC	None	Standard	Yes
VA-VT-4-40-30-S	40W	3000K	5200	80+	120-277VAC	Sensor	No	Yes
VA-VT-4-40-35-S	40W	3500K	5200	80+	120-277VAC	Sensor	No	Yes
VA-VT-4-40-40-S	40W	4000K	5200	80+	120-277VAC	Sensor	Standard	Yes
VA-VT-4-40-50-S	40W	5000K	5200	80+	120-277VAC	Sensor	Standard	Yes
VA-VT-4-40-30-E	40W	3000K	5200	80+	120-277VAC	Emergency	No	Yes
VA-VT-4-40-35-E	40W	3500K	5200	80+	120-277VAC	Emergency	No	Yes
VA-VT-4-40-40-E	40W	4000K	5200	80+	120-277VAC	Emergency	Standard	Yes
VA-VT-4-40-50-E	40W	5000K	5200	80+	120-277VAC	Emergency	Standard	Yes
VA-VT-4-40-30-ES	40W	3000K	5200	80+	120-277VAC	EM + Sensor	No	Yes
VA-VT-4-40-35-ES	40W	3500K	5200	80+	120-277VAC	EM + Sensor	No	Yes
VA-VT-4-40-40-ES	40W	4000K	5200	80+	120-277VAC	EM + Sensor	Standard	Yes
VA-VT-4-40-50-ES	40W	5000K	5200	80+	120-277VAC	EM + Sensor	Standard	Yes
VA-VT-4-60-30	60W	3000K	7800	80+	120-277VAC	None	No	Yes
VA-VT-4-60-35	60W	3500K	7800	80+	120-277VAC	None	No	Yes
VA-VT-4-60-40	60W	4000K	7800	80+	120-277VAC	None	No	Yes
VA-VT-4-60-50	60W	5000K	7800	80+	120-277VAC	None	No	Yes
VA-VT-4-60-30-S	60W	3000K	7800	80+	120-277VAC	Sensor	No	Yes
VA-VT-4-60-35-S	60W	3500K	7800	80+	120-277VAC	Sensor	No	Yes
VA-VT-4-60-40-S	60W	4000K	7800	80+	120-277VAC	Sensor	No	Yes
VA-VT-4-60-50-S	60W	5000K	7800	80+	120-277VAC	Sensor	No	Yes
VA-VT-4-60-30-E	60W	3000K	7800	80+	120-277VAC	Emergency	No	Yes
VA-VT-4-60-35-E	60W	3500K	7800	80+	120-277VAC	Emergency	No	Yes
VA-VT-4-60-40-E	60W	4000K	7800	80+	120-277VAC	Emergency	No	Yes
VA-VT-4-60-50-E	60W	5000K	7800	80+	120-277VAC	Emergency	No	Yes
VA-VT-4-60-30-ES	60W	3000K	7800	80+	120-277VAC	EM + Sensor	No	Yes
VA-VT-4-60-35-ES	60W	3500K	7800	80+	120-277VAC	EM + Sensor	No	Yes
VA-VT-4-60-40-ES	60W	4000K	7800	80+	120-277VAC	EM + Sensor	No	Yes
VA-VT-4-60-50-ES	60W	5000K	7800	80+	120-277VAC	EM + Sensor	No	Yes