

CLIENT

PROJECT

NOTES

WPD SERIES

ADJUSTABLE WALL PACK



The WPD Series is a high-efficiency wall pack with traditional semi cut off styling. Built with a high-quality UV resistant PC lens and a die-cast aluminum shell for durability.

- Adjustable dial to change output in the field
- Optional wireless sensor available for energy savings
- Optional factory installed emergency battery backup
- Die-Cast aluminum shell with a dark bronze finish
- UL wet rated, DLC® (Pending)



TECHNICAL DETAILS

POWER	65W, 100W
COLOR TEMPERATURE	3000K / 4000K / 5000K
CRI	70+ CRI
VOLTAGE	120-277VAC
EFFICIENCY	Up to 118lm/w
DIMMING	1-10V
LUMENS	Up to 12,123lm
HOUSING	Die-Cast Aluminum
WEIGHT	7.0lbs
OPERATING TEMPERATURE	-40°F to 104°F
WARRANTY	5 Years
FINISH	Dark Bronze, Black, White, Gray
LOCATION	Wet
CERTIFICATIONS	UL, DLC® (Pending)



LUMENS 5000K

59°	65W	52W	38W	26W
	7,950lm	6,857lm	5,403lm	3,860lm
100°	100W	82W	58W	36W
	11,702lm	10,708lm	8,268lm	5,558lm

L70: 50,000+ HOURS

DIMENSIONS

WEIGHT:
65W: 6.7lbs
100W: 7.3lbs



WPD SERIES

ADJUSTABLE WALL PACK

VALRIYA
SPEC GRADE COMMERCIAL LED LIGHTING

ORDERING GUIDE

Example: VA-WPD-065-LV35A-ADJ-D


VA-WPD		LV35A	ADJ		
	POWER	OUTPUT	ADJUSTABLE	FINISH	OPTIONS
	[065] 26W / 38W / 52W / 65W [100] 36W / 58W / 82W / 100W	[LV35A] 120-277VAC 3000K / 4000K / 5000K	[ADJ] Adjustment Dial	[D] Dark Bronze [B] Black [W] White [G] Gray	[PC] Photocell

ACCESSORIES*

SKU	DESCRIPTION
MS-PUNVC01	Button Photocell, Clear, 120-277VAC
BRI823	Wireless Motion + Photocell
RC100	Wireless Programmable Remote (BRI823)
YH12-W890	8W Split EM Driver, CEC Listed

*Items must be ordered separately

PHOTOMETRICS 65W / 5000K

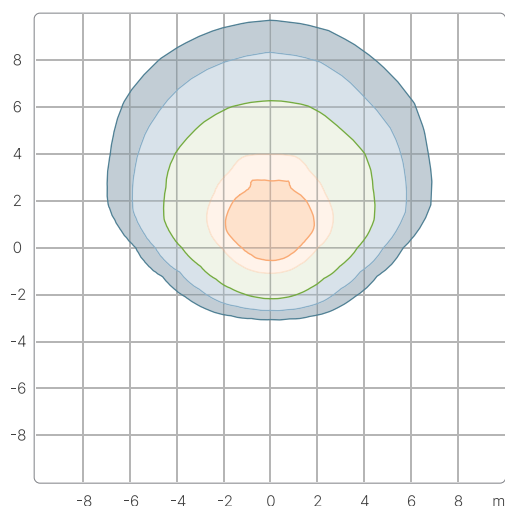

50.0 %	11.50 fc
30.0 %	6.90 fc
10.0 %	2.30 fc
5.0 %	1.15 fc
3.0 %	0.69 fc

Peak illuminance: 22.99 fc
Mounting height: 9.84 ft
Number of c-planes: 24

ACCESSORIES



MS-PUNVC01



BRI823



RC100



YH12-W890

WPD SERIES

ADJUSTABLE WALL PACK

VALRIYA
SPEC GRADE COMMERCIAL LED LIGHTING

SKU	WATTS	SETTING	CCT	LUMENS	CRI	VOLTAGE	DLC	QUICK SHIP
VA-WPD-065-LV35A-ADJ-X	67.17W	100%	3000K	7,761	70+	120-277VAC	Pending	Yes
VA-WPD-065-LV35A-ADJ-X	55.34W	80%	3000K	6,695	70+	120-277VAC	Pending	Yes
VA-WPD-065-LV35A-ADJ-X	40.97W	60%	3000K	5,275	70+	120-277VAC	Pending	Yes
VA-WPD-065-LV35A-ADJ-X	27.50W	40%	3000K	3,769	70+	120-277VAC	Pending	Yes
VA-WPD-065-LV35A-ADJ-X	63.67W	100%	4000K	8,334	70+	120-277VAC	Pending	Yes
VA-WPD-065-LV35A-ADJ-X	52.46W	80%	4000K	7,189	70+	120-277VAC	Pending	Yes
VA-WPD-065-LV35A-ADJ-X	38.84W	60%	4000K	5,664	70+	120-277VAC	Pending	Yes
VA-WPD-065-LV35A-ADJ-X	26.06W	40%	4000K	4,047	70+	120-277VAC	Pending	Yes
VA-WPD-065-LV35A-ADJ-X	67.30W	100%	5000K	7,950	70+	120-277VAC	Pending	Yes
VA-WPD-065-LV35A-ADJ-X	55.45W	80%	5000K	6,857	70+	120-277VAC	Pending	Yes
VA-WPD-065-LV35A-ADJ-X	41.05W	60%	5000K	5,403	70+	120-277VAC	Pending	Yes
VA-WPD-065-LV35A-ADJ-X	27.55W	40%	5000K	3,860	70+	120-277VAC	Pending	Yes
VA-WPD-100-LV35A-ADJ-X	99.40W	100%	3000K	11,604	70+	120-277VAC	Pending	Yes
VA-WPD-100-LV35A-ADJ-X	87.62W	80%	3000K	10,620	70+	120-277VAC	Pending	Yes
VA-WPD-100-LV35A-ADJ-X	62.02W	60%	3000K	8,200	70+	120-277VAC	Pending	Yes
VA-WPD-100-LV35A-ADJ-X	38.68W	40%	3000K	5,512	70+	120-277VAC	Pending	Yes
VA-WPD-100-LV35A-ADJ-X	94.13W	100%	4000K	12,123	70+	120-277VAC	Pending	Yes
VA-WPD-100-LV35A-ADJ-X	82.97W	80%	4000K	11,094	70+	120-277VAC	Pending	Yes
VA-WPD-100-LV35A-ADJ-X	58.73W	60%	4000K	8,566	70+	120-277VAC	Pending	Yes
VA-WPD-100-LV35A-ADJ-X	36.63W	40%	4000K	5,758	70+	120-277VAC	Pending	Yes
VA-WPD-100-LV35A-ADJ-X	99.88W	100%	5000K	11,702	70+	120-277VAC	Pending	Yes
VA-WPD-100-LV35A-ADJ-X	88.04W	80%	5000K	10,708	70+	120-277VAC	Pending	Yes
VA-WPD-100-LV35A-ADJ-X	62.32W	60%	5000K	8,268	70+	120-277VAC	Pending	Yes
VA-WPD-100-LV35A-ADJ-X	38.87W	40%	5000K	5,558	70+	120-277VAC	Pending	Yes