


CLIENT _____
PROJECT _____
NOTES _____

SLT Series

Adjustable Strip Light

Highlights

- Adjustable strip light ideal for stairwells, corridors, indoor parking, and storage
- Improved design that opens without fasteners for quick and easy install
- Features adjustable color temp and power output on the driver:
 - 3500K / 4000K / 5000K
 - 3 different wattages
- Optional integrated EM driver and or motion sensor available
- High efficiency 130lm/w fixture
- UL, DLC

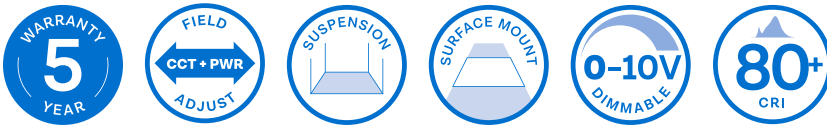

Ordering Guide

Example: VA-SLT-4-35A


VA-SLT-X-35A-X

VA	-	SLT	-	-	35A	-	
VALRIYA		FAMILY		SIZE	CCT	POWER	OPTIONS
VA		SLT		X	35A	BLANK	X
		Adjustable Strip		4= 4ft	3500K/4000K/5000K	4ft = 34W/38W/45W	E = EM Driver
		Light		8= 8ft		8ft = 65W/75W/90W	S = Occ. Sensor
							ES = EM + Sensor
							Blank = No Options

SLT Series

Adjustable Strip Light

0.1 Dimensions

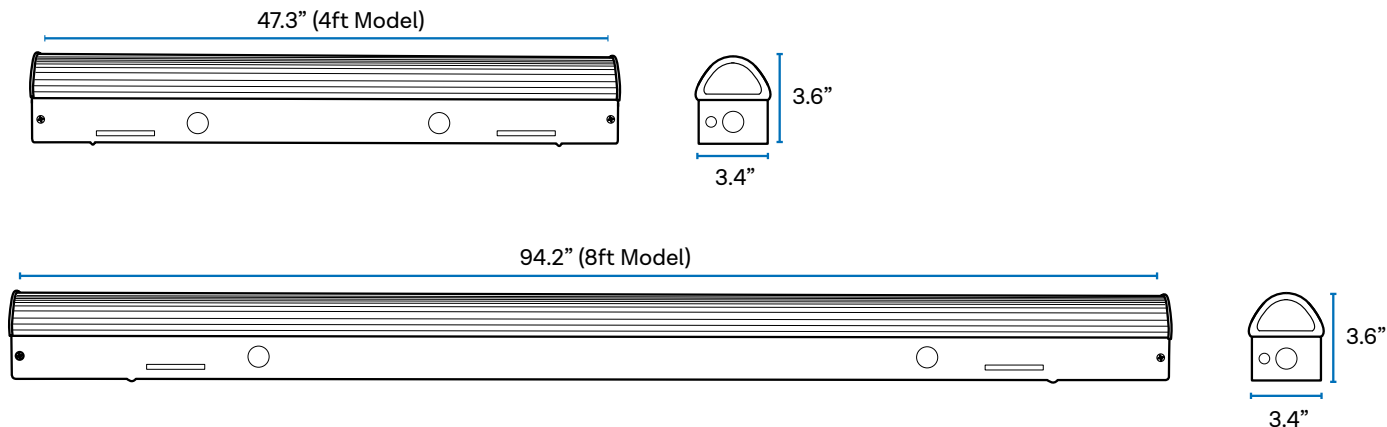

0.2 Technical Overview

CATEGORY	SPECIFICATION	DETAILS	
General Performance	Length	4ft	8ft
	Nominal Power	34W / 38W / 45W	65W / 75W / 90W
	Nominal Lumens Delivered	4800lm / 5200lm / 5900lm	9,200lm / 10,300lm / 11,800lm
	Efficiency (lm/w)	130lm	
	Color Temperature (CCT)	3500K / 4000K / 5000K	
	Dimming	Standard 0-10V Dimming	
	Input Voltage	120-277V 50/60 Hz	
	CRI	80+	
	Lumen Maintenance (L70)	50,000 Hours+	
Physical	Dimensions (Inches)	See Above	
	Weight	4.5lbs	9.0lbs
	Housing	Steel	
	Diffuser / Lens	PC	
	Mounting	Surface Mount / Suspension	
	Operating Temperature	-4°F to 122°F	
Certifications	Safety Certification	UL, Damp Location	
	DLC Listed*	V4.4, Premium	
	Warranty	5 Year	

* Nominal Lumens Delivered based on 5000K. DLC listing is pending

SLT Series

Adjustable Strip Light

0.3 SKU List

SKU	DESCRIPTION	WATTS	CCT	LUMENS	CRI	DIM	INPUT VOLTAGE	OPTIONS	CERTS.	DLC*	QUICK SHIP
VA-SLT-4-35A	4ft Strip	34W-38W-45W	35K-40K-50K	4800-5200-5900	80+	0-10	120-277VAC	None	UL, Damp Location	5.1 Standard	Yes
VA-SLT-4-35A-S	4ft Strip	34W-38W-45W	35K-40K-50K	4800-5200-5900	80+	0-10V	120-277VAC	Sensor	UL, Damp Location	No	Yes
VA-SLT-4-35A-E	4ft Strip	34W-38W-45W	35K-40K-50K	4800-5200-5900	80+	0-10V	120-277VAC	EM	UL, Damp Location	No	Yes
VA-SLT-4-35A-ES	4ft Strip	34W-38W-45W	35K-40K-50K	4800-5200-5900	80+	0-10V	120-277VAC	None	UL, Damp Location	No	Yes
VA-SLT-8-35A	8ft Strip	65W-75W-90W	35K-40K-50K	9,200-10,300-11,800	80+	0-10V	120-277VAC	Sensor + EM	UL, Damp Location	5.1 Standard	Yes
VA-SLT-8-35A-S	8ft Strip	65W-75W-90W	35K-40K-50K	9,200-10,300-11,800	80+	0-10V	120-277VAC	Sensor	UL, Damp Location	No	Yes
VA-SLT-8-35A-E	8ft Strip	65W-75W-90W	35K-40K-50K	9,200-10,300-11,800	80+	0-10V	120-277VAC	EM	UL, Damp Location	No	Yes
VA-SLT-8-35A-ES	8ft Strip	65W-75W-90W	35K-40K-50K	9200-10,300-11,800	80+	0-10V	120-277VAC	Sensor +EM	UL, Damp Location	No	Yes

*DLC listing is pending


0.4 Options & Accessories

SKU	DESCRIPTION
EM-0825	8W EM Driver, CEC Listed ¹
MC612V D RC	Wireless Occ Sensor
MH02 ²	Wireless Remote (MC612V D RC)
MC087V RC	Wireless Occ Sensor
MH10 ²	Wireless Remote (MC087V RC)
BRI819-B-D ²	Wireless Occ Sensor (PIR)
RC100 ²	Wireless Remote (BRI819-B-D)
VA-CSK ²	Chain Suspension Kit (4ft length)
VA-SLT-WG ²	Wire Guard
VA-SLT-JB ²	Joining Bracket

¹ EM wattage must be specified ² Items must be ordered separately



EM-0825




MC612V D RC



MC087V RC



BRI819-B-D



MH02




MH10




RC100



CSK



Wire Guard



Joining Bracket

SLT Series


Adjustable Strip Light

0.5 Photometric Data (4ft, 45W, 3500K)

CANDLE POWER

ANGLE	C0	C45	C90
10	1655	1647	1646
20	1549	1550	1561
30	1380	1405	1435
40	1165	1225	1283
50	923	1022	1110
60	664	818	932
70	398	623	756
80	153	451	594
90	8	311	450

CANDELA PLOT

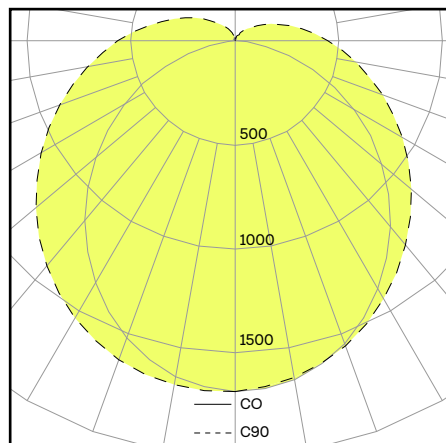

ZONAL LUMEN SUMMARY

ZONE	LUMENS	% FIXTURE	LAMP
0-30	1308	21.0	21.0
0-40	2146	34.4	34.4
0-60	3868	62.0	62.0
0-90	5524	88.5	88.5
0-180	6241	100.0	100.0

COEFFICIENT OF UTILIZATION (PFC - 20%)

RCR	RC	80%			70%			50%			30%			10%			0%
		50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
0		116	116	116	112	112	112	105	105	105	98	98	98	91	91	91	89
1		98	93	89	95	90	86	88	85	81	82	79	77	77	75	72	69
2		84	77	71	82	75	69	76	70	65	71	66	62	66	63	59	56
3		74	65	58	71	63	57	66	60	54	62	56	52	58	53	49	47
4		65	56	49	63	54	48	59	51	46	55	49	44	52	46	42	39
5		58	48	41	56	47	41	52	45	39	49	43	38	46	41	36	34
6		52	43	36	50	42	35	47	40	34	44	38	33	42	36	32	29
7		47	38	32	46	37	31	43	35	30	40	34	29	38	32	28	26
8		43	34	28	41	33	28	39	32	27	37	31	26	35	29	25	23
9		39	31	25	38	30	25	36	29	24	34	28	23	32	27	23	21
10		36	28	23	35	27	22	33	26	22	32	25	21	30	24	20	19

*Effective floor cavity reflectance 20%

*Additional IES data can be downloaded [here](#)