

CLIENT
PROJECT
NOTES



## COMBOELR SERIES

### EXIT LIGHT COMBO

The COMBOELR Series is an edge-lit exit sign, reinventing the meaning of edge-lit signage, allowing one sign to meet multiple needs for the first time.


- UL 924, NEC, OSHA, NFPA 101 Life Safety Code
- Damp location listed
- Aluminum housing with high-grade acrylic face
- Field installable arrows for left, right, or both directions
- Long life LED illumination



### FEATURES

BACKUP BATTERY	NiCad 3.6V 1800mAh
VOLTAGE	120-277V
WEIGHT	10lbs.
MOUNTING	Wall, Ceiling, Recessed
OPERATING TEMP	41°F to 104°F
WARRANTY	1 Year
LOCATION	Damp
CERTIFICATIONS	UL 924, NEC, OSHA, NFPA101

### DIMENSIONS

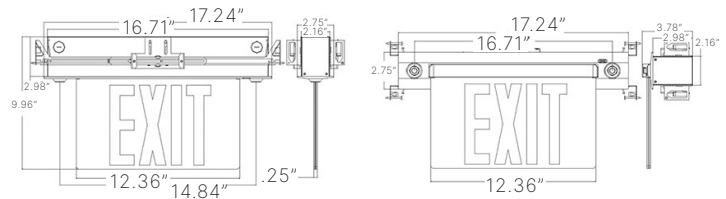

### ORDERING GUIDE

VA-COMBOELR	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
	<b>LETTER COLOR</b>	<b>HOUSING</b>	<b>OPERATION</b>	<b>SIDES</b>
	[R] Red [G] Green	[A] Brushed Aluminum [B] Black [W] White	[BB] Battery Backup	[S] Single Sided [DM] Double Sided Mirrored

Example: VA-COMBOELR-G-A-BB-S

### EMERGENCY OPERATION

Upon failure of the normal utility power, an internal solid state transfer switch automatically provides uninterrupted emergency operation for at least 90 minutes. The fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

### BATTERY BACKUP

The COMBOELR Series is designed with a 3.6V 1800mAh maintenance-free NiCad battery. The battery is protected by a low voltage cut-off circuit. The operating temperature range for the battery is 41°F (5°C) to 104°F (40°C).