

CESJR SERIES

EXIT LIGHT

The CESJR Series features an all LED design with no SLA batteries, using long lasting NiCads. With a lightweight, snap-together construction.

- 3.6V 1000mAh battery
- Universal mounting canopy for top installation or flush mount to wall.
- Injection molded, impact, and scratch-resistant
- Universal J-Box mounting pattern
- UL924, NEC, OSHA, NFPA 101 Life Safety Code
- Damp location

TECHNICAL DETAILS

BACKUP BATTERY	3.6V 1000mAh NiCad Battery
VOLTAGE	120VAC / 277VAC
WEIGHT	10lbs.
MOUNTING	Flush Mount, Wall
REMOTE HEAD	ERH Series & ORH Series
OPERATING TEMPERATURE	32°F to 104°F
WARRANTY	1 Year
LOCATION	Damp
CERTIFICATIONS	UL924, NEC, OSHA, NFPA 101


ORDERING GUIDE

VA-CESJR	—	<input type="text"/>	—	<input type="text"/> W <input type="text"/>	—	<input type="text"/>
		LETTER COLOR		HOUSING		OPERATION
		[R] Red [G] Green		[W] White		[BB] Battery Backup [RH] Remote Head Capable


Example: VA-CESJR-R-A-BB

EMERGENCY OPERATION

Upon failure of the normal utility power, an internal solid state transfer switch automatically provides uninterrupted emergency operation for atleast 90 minutes. The fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24hours.

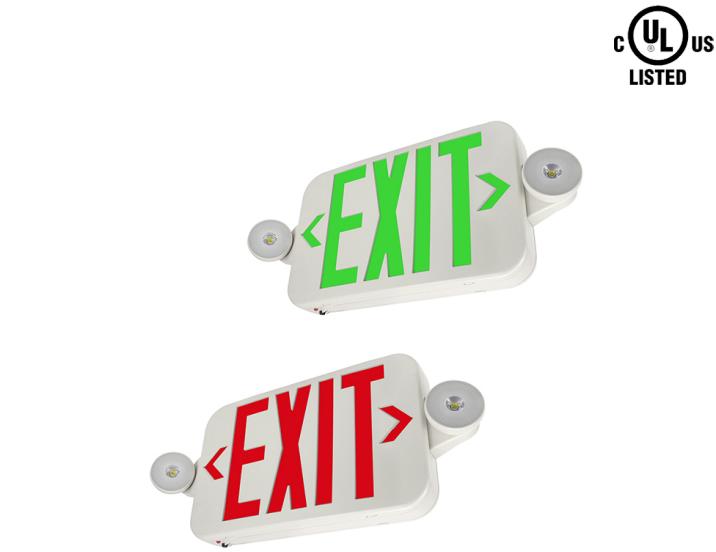

DIMENSIONS

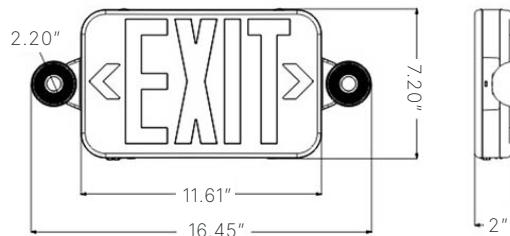

BATTERY BACKUP

The CESJR Series is designed with a maintenance-free 3.6V 1000mAh NiCad battery that provides a minimum emergency duration of 90 minutes. Recharge time of the battery is 24hours.