



# CEST SERIES

## EXIT LIGHT COMBO

The CEST Series is an ultra thin LED combo exit sign with a sleek and modern design. Featuring an injection-molded, high-impact, UL94 V-0 thermoplastic construction.


- Two 300° adjustable LED lamps
- Universal mounting pattern knock-out in back plate for J-Box mounting
- Test switch and charge indicator
- Innovative and easy installation
- cUL, UL924, NEC, NFPA 101 Life Safety Code



## TECHNICAL DETAILS

BACKUP BATTERY	NiMH 1.2V 1000mAh
VOLTAGE	120-277VAC
WEIGHT	7lbs.
MOUNTING	Wall, Ceiling
OPERATING TEMP	32°F to 104°F
WARRANTY	1 Year
LOCATION	Dry
CERTIFICATIONS	cUL, UL 924, NEC, NFPA101

## DIMENSIONS

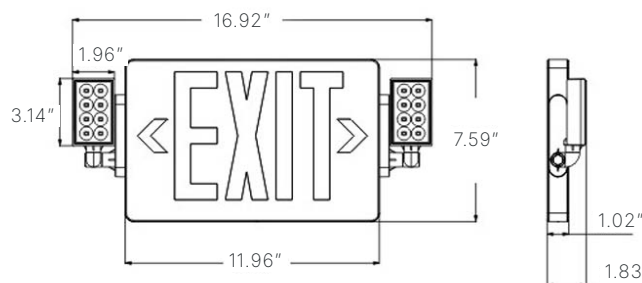

## ORDERING GUIDE

VA-CEST	<input type="text"/>	<input type="text" value="W"/>	<input type="text" value="BB"/>
	<b>LETTER COLOR</b>	<b>HOUSING</b>	<b>OPERATION</b>
	[R] Red [G] Green	[W] White	[BB] Battery Backup

Example: VA-CEST-R-W

## EMERGENCY OPERATION

Upon failure of the normal utility power, an internal solid-state transfer switch automatically provides uninterrupted emergency operation for at least 90 minutes. The fully automatic solid-state, two-rate charger initiates recharging a discharged battery within 24 hours.

## BATTERY BACKUP

The CEST Series is designed with 2 maintenance-free Ni-MH batteries - (1) 1.2V 1000mAh and (1) 2.4V 1000mAh - that provides an emergency duration of 90 minutes. Recharge time of the battery is 24 hours.