

CLIENT

PROJECT


NOTES

CLE SERIES

ADJUSTABLE CANOPY

The CLE Series is an energy efficient LED canopy with a lightweight design. Ideal for parking garage, warehouse and industrial applications. Featuring a precision engineered optical lens for reduced glare and improved performance.

- Standard external quick mounting plate
- Compatible with 3/4" pendant fixtures
- 1/2" knockout on all 4 sides
- Corrosion resistant powder coating
- UL & wet location



TECHNICAL DETAILS


POWER 40W	16W / 24W / 32W / 40W
POWER 60W	24W / 36W / 48W / 60W
POWER 70W	28W / 42W / 56W / 70W
COLOR TEMPERATURE	3000K / 4000K / 5000K
CRI	70+ CRI
VOLTAGE	120-277VAC
EFFICIENCY	Up to 172lm/w
DIMMING	0-10V
LUMENS	Up to 10,500lm
HOUSING	Aluminum
MOUNTING	Surface, Conduit Pendant
OPERATING TEMPERATURE	-40°F to 104°F
WARRANTY	5 Years
FINISH	Dark Bronze, Black, White, Gray
LOCATION	Wet
CERTIFICATIONS	UL

LUMENS 4000K

40W	16W	24W	32W	40W
	2,700lm	3,900lm	5,100lm	6,200lm
60W	24W	36W	48W	60W
	4,100lm	6,100lm	7,900lm	9,400lm
70W	28W	42W	56W	70W
	4,600lm	6,700lm	8,700lm	10,500lm

L70: 50,000+ HOURS

DIMENSIONS

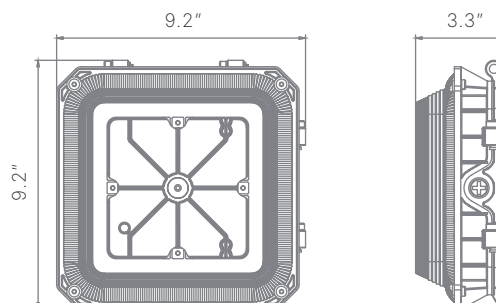

CLE SERIES

ADJUSTABLE CANOPY

VALRIYA
SPEC GRADE COMMERCIAL LED LIGHTING

ORDERING GUIDE

Example: VA-CLE-LV40-ADJ-D


VA-CLE	LV		ADJ		
	VOLTAGE	POWER	CCT	FINISH	EMERGENCY
	[LV] 120-277VAC	[40] 16W / 24W / 32W / 40W [60] 24W / 36W / 48W / 60W [70] 28W / 42W / 56W / 70W	[ADJ] Adjustable CCT 30K / 40K / 50K	[D] Dark Bronze [B] Black [W] White [G] Gray [C] Custom	[E] 8W EM Driver
	SENSOR				
	[S1] ANT-6-4T (PIR Motion & Photocell, DC) [S2] ANT-6-4T-BLE (Bluetooth® PIR Motion & Photocell, DC)				

ACCESSORIES*

SKU	DESCRIPTION
☐ VA-CLE-EBB	8W Emergency Battery Backup + External Box

*Items must be ordered separately

PHOTOMETRICS 60W / 5000K

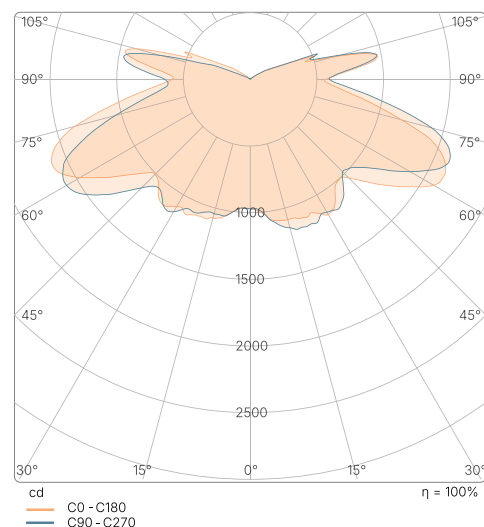

ACCESSORIES




VA-CLE-EBB

MOUNTING



SURFACE

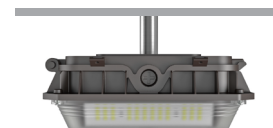

CONDUIT PENDANT