VALRIYA

SPEC GRADE COMMERCIAL LED LIGHTING

| |
|---|
| CLIENT |
| PROJECT |
| NOTES |

# 2.3" ALP SERIES

## ARCHITECTURAL LINEAR

The ALP Series is a versatile, specification-grade architectural linear fixture that can be configured into multiple shapes for endless design possibilities. Featuring field-adjustable up/down light distribution, lumen output, and CCT, it offers easy installation and flexibility for commercial, retail, and healthcare applications.

- 5 different lens options
- Hard-lid ceiling or drop ceiling compatible
- 0-10V Dim to 1% or 10%
- Individual or continuous runs
- Linear, corner, T, V, Y, X & Z joining accessories

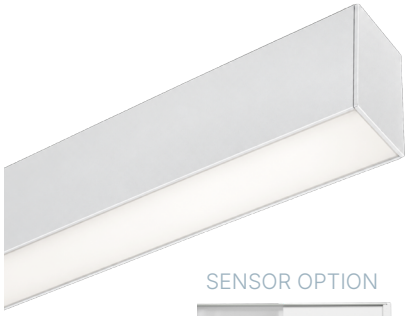

SENSOR OPTION

## TECHNICAL DETAILS

| | |
|---|---|
| POWER 2FT | 10W / 15W / 20W |
| POWER 4FT | 20W / 30W / 40W |
| POWER 8FT | 40W / 60W / 80W |
| COLOR TEMPERATURE | 3000K / 3500K / 4000K |
| CRI | 80+ CRI, 90+ CRI |
| VOLTAGE | 110-277VAC |
| EFFICIENCY | Up to 105lm/w |
| DIMMING | 0-10V Dim to 1% or 10% |
| HOUSING | Aluminum |
| MOUNTING | Suspension, Wall, Surface |
| OPERATING TEMPERATURE | 14°F to 104°F |
| WARRANTY | 5 Years |
| FINISH | Black, White |
| LOCATION | Damp |
| CERTIFICATIONS | UL |

## LUMENS 100% DOWN / DIFFUSER / 4000K

| | | | |
|---|---|---|---|
| 2FT | 10W | 15W | 20W |
| | 1,000lm | 1,500lm | 2,100lm |
| 4FT | 20W | 30W | 40W |
| | 2,000lm | 3,000lm | 4,200lm |
| 8FT | 40W | 60W | 80W |
| | 4,000lm | 6,000lm | 8,400lm |

**L70:** 50,000+ HOURS

## LENS OPTIONS

DIFFUSER | LOUVER | REFLECTOR | REGRESS | WALL WASH

## DIMENSIONS

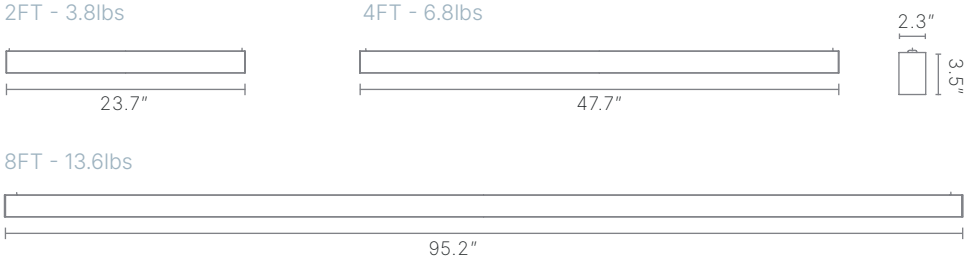

# 2.3" ALP SERIES
## ARCHITECTURAL LINEAR

VALRIYA
SPEC GRADE COMMERCIAL LED LIGHTING

## ORDERING GUIDE

Example: VA-ALP-4-LVA-810-35A-W-D-SM

VA-ALP — [ ] — [LV] — [ ] — [ ] — [ ] — [35A]

**SIZE / POWER**
[2] 2ft 10W / 15W / 20W
[4] 4ft 20W / 30W / 40W
[8] 8ft 40W / 60W / 80W
[X] Xft Total Run (Linear Joiner)

**VOLTAGE**
[LV] 110-277VAC

**DISTRIBUTION**
[A] Adjustable Up/Down
[D] Down 100%

**CRI**
[8] 80+ CRI
[9] 90+ CRI

**DIMMING**
[10] Dim to 10%
[01] Dim to 1%

**CCT**
[35A] 30K / 35K / 40K

[ ] — [ ] — [ ] — [ ] — [ ]

**FINISH**
[W] White
[B] Black
[C] Custom

**DOWN LENS**
[D] Diffuser
[L] Louver
[R] Regress
[M] Micro Reflector [1]
[W] Wall Wash 30°

**MOUNTING**
[5S] 5ft Aircraft Suspension
[12S] 12ft Aircraft Suspension
[XS] Custom Aircraft Suspension
[SM] Surface Mount
[WM] Wall Mount

**PENDANT CEILING**
[DC] Hard-Lid Ceiling to J-Box
[DF] Drop Ceiling Clips for 9/16" & 15/16" Flat Ceiling
[9S] Drop Ceiling Clips for 9/16" Slot Ceiling
[5S] Drop Ceiling Clips for 15/16" Slot Ceiling

**POWER CORD**
[4W] 4ft White
[12W] 12ft White
[XW] Custom White
[4B] 4ft Black
[12B] 12ft Black
[XB] Custom Black

[ ] — [ ] — [ ]

**PENDANT CANOPY**
[RW] Round White (1.6" & 4.5" for Power)
[SW] Square White (1.6" & 4.5" for Power)
[RB] Round Black (1.6" & 4.5" for Power)
[SB] Square Black (1.6" & 4.5" for Power)

**EMERGENCY**
[IE15] Internal 15W EM Driver
[E15] External 15W EM Driver
[E25] External 25W EM Driver

**SENSOR**
[S1] ANT-15P-KIT (PIR Motion & Daylight)
[S2] ANT-15P-KIT-BLE (Bluetooth® PIR Motion & Daylight)

For custom shapes and designs please contact us [1] Only available with [8] 80+ CRI option

## ACCESSORIES*

| SKU | DESCRIPTION |
|---|---|
| VA-ALP-LC | Linear Joiner |
| VA-ALP-CC | Corner Joiner (90° Non-Illuminated) |
| VA-ALP-VC | V-Joiner (120° Non-Illuminated) |
| VA-ALP-TC | T-Joiner (90° Non-Illuminated) |
| VA-ALP-YC | Y-Joiner (120° Non-Illuminated) |
| VA-ALP-XC | X-Joiner (90° Non-Illuminated) |
| VA-ALP-ZC | Z-Joiner (Vertical Non-Illuminated) |
| VA-ALP-CL | Corner Joiner (90° Illuminated) |
| VA-ALP-VL | V-Joiner (120° Illuminated) |
| VA-ALP-TL | T-Joiner (90° Illuminated) |
| VA-ALP-YL | Y-Joiner (120° Illuminated) |
| VA-ALP-XL | X-Joiner (90° Illuminated) |
| VA-ALP-40L | 40ft Continuous Lens |
| VA-ALP-TJB | T-Bar Junction Box |
| RC100 | Wireless Remote (BRI & ANT Series) |

ACCESSORIES

LINEAR JOINER

CORNER JOINER

V-JOINER

T-JOINER

Y-JOINER

X-JOINER

Z-JOINER

VA-ALP-40L

VA-ALP-TJB

RC100

*Items must be ordered separately

# 2.3" ALP SERIES
## ARCHITECTURAL LINEAR

VALRIYA
SPEC GRADE COMMERCIAL LED LIGHTING

NON-ILLUMINATED JOINER DIMENSIONS

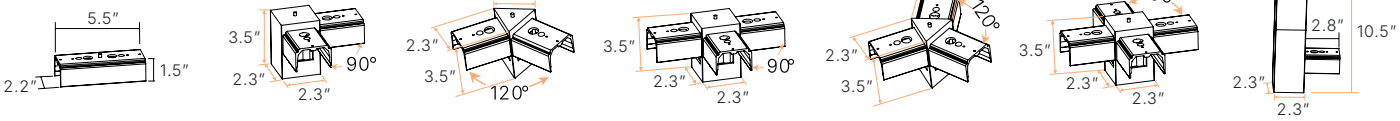


VA-ALP-LC (Linear Joiner) | VA-ALP-CC (Corner Joiner) | VA-ALP-VC (V-Joiner) | VA-ALP-TC (T-Joiner) | VA-ALP-YC (Y-Joiner) | VA-ALP-XC (X-Joiner) | VA-ALP-ZC (Z-Joiner)

ILLUMINATED JOINER DIMENSIONS

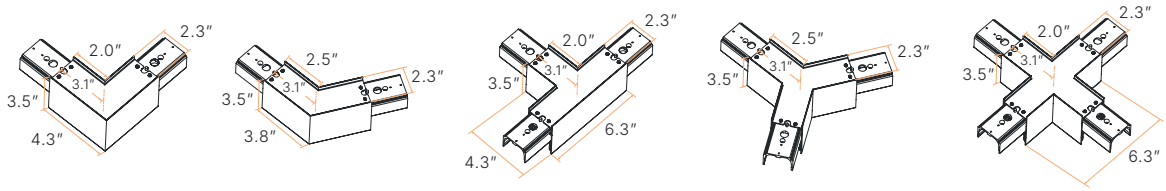


VA-ALP-CL (Lit Corner Joiner) | VA-ALP-VL (Lit V-Joiner) | VA-ALP-TL (Lit T-Joiner) | VA-ALP-YL (Lit Y-Joiner) | VA-ALP-XL (Lit X-Joiner)

## CUSTOM SHAPE ORDERING

Example: VA-ALP-R-2-4

VA-ALP — [ ] — [ ]

**SHAPE**

[S] Square
[R] Rectangle
[H] Hexagon
[L] L-Shape
[T] T-Shape
[Y] Y-Shape
[X] X-Shape

**LENGTHS**

[X-X] X = 2ft, 4ft, or 8ft (X1 - X2 - X3 - X4)
See dimensional illustrations below

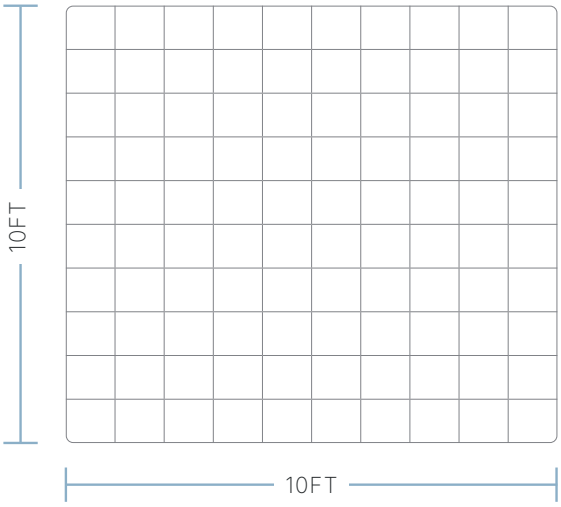


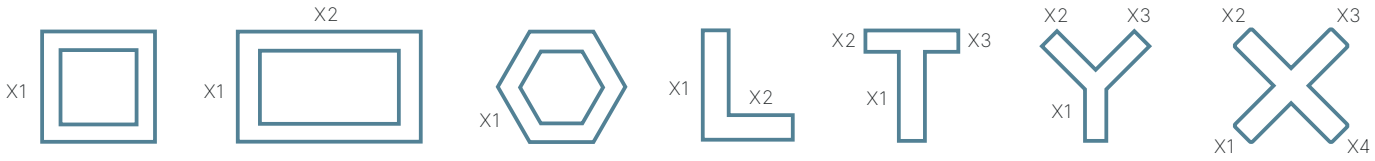


SQUARE | RECTANGLE | HEXAGON | L-SHAPE | T-SHAPE | Y-SHAPE | X-SHAPE

For custom shapes and designs please contact us

# 2.3" ALP SERIES
## ARCHITECTURAL LINEAR

VALRIYA
SPEC GRADE COMMERCIAL LED LIGHTING

MOUNTING POINTS

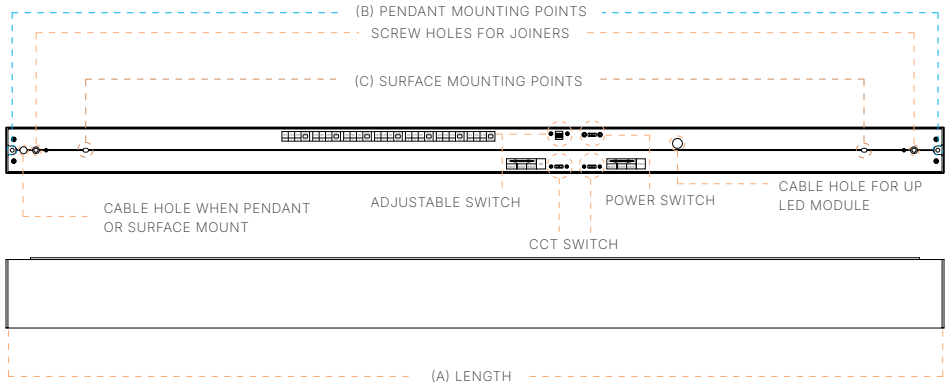


| | A | B | C |
|---|---|---|---|
| 2′ | 23.70″ | 23.1″ | 15.6″ |
| 4′ | 47.7″ | 47.1″ | 39.6″ |
| 8′ | 95.2″ | 93.1″ | 87.1″ |

LINEAR RUNS

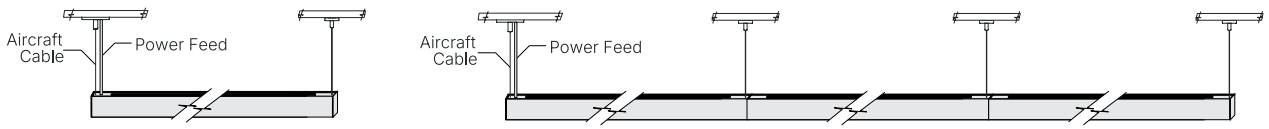


INDIVIDUAL RUN

CONTINUOUS RUN
(Up to 40ft in 120VAC, 100ft in 277VAC

## LINEAR RUN CONFIGURATIONS

| RUN LENGTH | CONFIGURATION | LINEAR CONNECTOR | POWER CABLE | AIRCRAFT CABLE | CANOPY |
|---|---|---|---|---|---|
| 2' | 2′ | 0 | 1 | 2 | 2 |
| 4' | 4′ | 0 | 1 | 2 | 2 |
| 6' | 4′+2′ | 1 | 1 | 3 | 3 |
| 8' | 8′ | 0 | 1 | 2 | 2 |
| 10' | 8′+2′ | 1 | 1 | 3 | 3 |
| 12' | 8′+4′ | 1 | 1 | 3 | 3 |
| 14' | 8′+4′+2′ | 2 | 1 | 4 | 4 |
| 16' | 8′+8′ | 1 | 1 | 3 | 3 |
| 18' | 8′+8′+2′ | 2 | 1 | 4 | 4 |
| 20' | 8′+8′+4′ | 2 | 1 | 4 | 4 |
| 22' | 8′+8′+4′+2′ | 3 | 1 | 5 | 5 |
| 24' | 8′+8′+8′ | 2 | 1 | 4 | 4 |
| 26' | 8′+8′+8′+2′ | 3 | 1 | 5 | 5 |
| 28' | 8′+8′+8′+4′ | 3 | 1 | 5 | 5 |
| 30' | 8′+8′+8′+4′+2′ | 4 | 1 | 6 | 6 |

# 2.3" ALP SERIES
## ARCHITECTURAL LINEAR

VALRIYA
SPEC GRADE COMMERCIAL LED LIGHTING

PENDANT OPTIONS


1.6" Round
(Non Power Feed)

4.5" Round
(Power Feed)

1.6" Square
(Non Power Feed)

4.5" Square
(Power Feed)


Hard-Lid Ceiling / Off Grid
(Mount to J-Box)

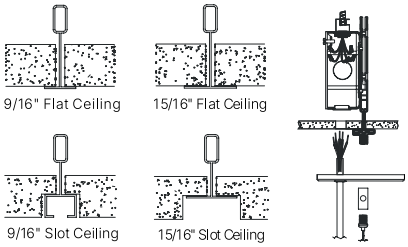

Drop Ceiling / On Grid
(9/16" Flat & Slot, 15/16" Flat & Slot)

White
Power Cord

Black
Power Cord

ADJUSTABLE LIGHT DISTRIBUTION

EASILY CHANGE DISTRIBUTION WITH THE SWITCH ON THE FIXTURE

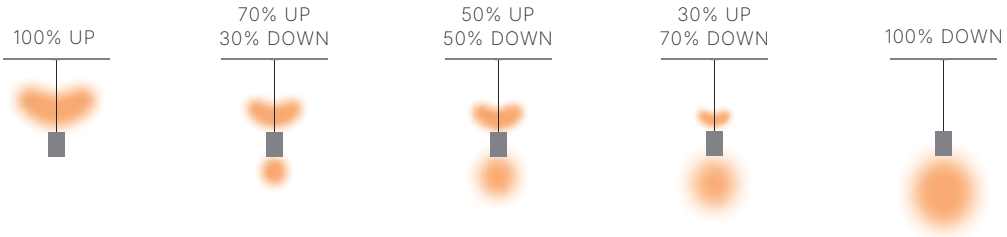


## PHOTOMETRICS

4FT / 40W / 4000K / 100% DOWN

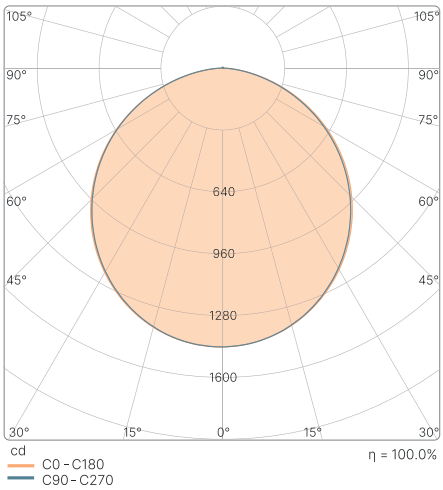

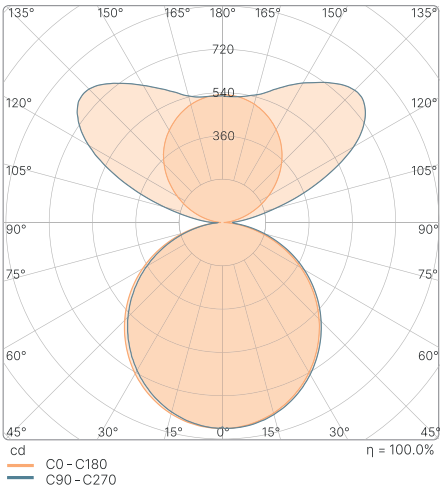
4FT / 40W / 4000K / 50% UP 50% DOWN