VALRIYA

SPEC GRADE COMMERCIAL LED LIGHTING

CLIENT
PROJECT
NOTES

2.4" ALPC SERIES

CONTRACTOR LINEAR

The ALPC Series is ideal for any architectural, commercial, retail, or healthcare setting. Featuring variable up/down light distribution, lumen output, and CCT, that can be adjusted in the field in multiple configurations for endless design ideas.

- Sensor ready out of the box
- Adjustable color temperature and power output
- 6 different joining accessories
- Adjustable light distribution

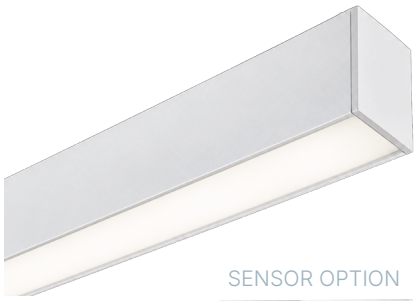

SENSOR OPTION

TECHNICAL DETAILS

POWER 2FT	10W / 15W / 20W
POWER 4FT	20W / 30W / 40W
POWER 8FT	40W / 60W / 80W
COLOR TEMP	2700K / 3000K / 3500K / 4000K / 5000K
CRI	80+ CRI
DISTRIBUTION	Direct, Direct / Indirect
VOLTAGE	120-277VAC
EFFICIENCY	Up to 120lm/w
DIMMING	0-10V
HOUSING	Aluminum
MOUNTING	Suspension, Wall, Surface
OPERATING TEMP	-4°F to 104°F
WARRANTY	5 Years
FINISH	Black, White, Custom
LOCATION	Damp
CERTIFICATIONS	UL

LUMENS 4000K

2FT	10W	15W	20W
	1,200lm	1,800lm	2,400lm
4FT	20W	30W	40W
	2,400lm	3,600lm	4,800lm
8FT	40W	60W	80W
	4,800lm	7,200lm	9,600lm

L70: 50,000+ HOURS

LENS TYPES

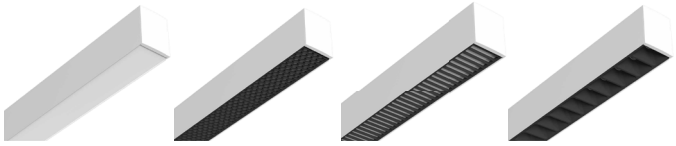

DIFFUSER HEX LOUVER UGR LOUVER

DIMENSIONS

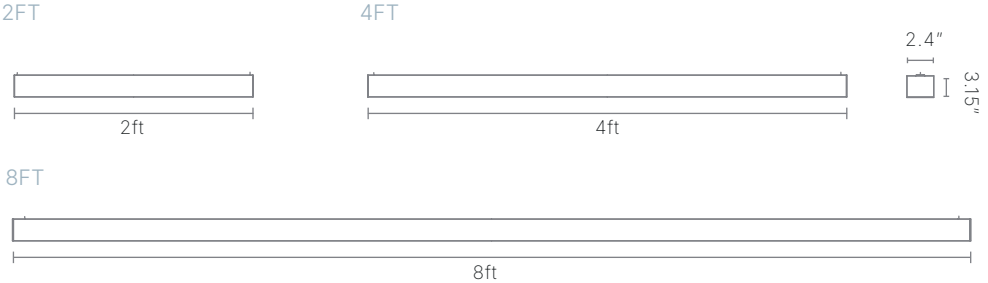

2.4" ALPC SERIES
CONTRACTOR LINEAR

VALRIYA
SPEC GRADE COMMERCIAL LED LIGHTING

ORDERING GUIDE

Example: VA-ALPC-LV4D-ADJ-B-DW

VA-ALPC — [LV] — [ ] — [ ] — [ ] — [ ]

VOLTAGE
[LV] 120-277VAC

SIZE / POWER
[2] 2ft 10W / 15W / 20W
[4] 4ft 20W / 30W / 40W
[8] 8ft 40W / 60W / 80W

DISTRIBUTION
[D] Direct Lens
[DI] Direct / Indirect Lens

DIRECT LENS
[BLANK] Diffuser
[H] Hex
[L] Louver
[UL] UGR Louver

INDIRECT LENS
[BLANK] Batwing

[ADJ] — [ ] — [ ] — [ ] — [ ]

CCT
[ADJ] Adjustable CCT

FINISH
[W] White
[B] Black
[C] Custom

EMERGENCY
[IE8] Internal 8W EM Driver
[IE15] Internal 15W EM Driver
[E15] External 15W EM Driver
[E25] External 25W EM Driver

SENSOR
[S1] ANT-15P-KIT (PIR Motion & Daylight)
[S2] ANT-15P-KIT-BLE (Bluetooth® PIR Motion & Daylight)

MOUNTING
[DW] Drywall Pendant
[DC] Drop Ceiling Pendant
[SM] Surface Mount
[WM] Wall Mount

For custom shapes and designs please contact us

ACCESSORIES*

SKU	DESCRIPTION
☐ VA-ALPC-LC	Linear Connector
☐ VA-ALPC-CC	Corner Connector (90°) Illuminated
☐ VA-ALPC-VC	V-Connector (120°) Illuminated
☐ VA-ALPC-TC	T-Connector (90°) Illuminated
☐ VA-ALPC-YC	Y-Connector (120°) Illuminated
☐ VA-ALPC-XC	X-Connector (90°) Illuminated
☐ VA-ALPC-40L	40ft Continuous Lens
☐ RC100	Wireless Remote (BRI & ANT Series)

*Items must be ordered separately

ACCESSORIES

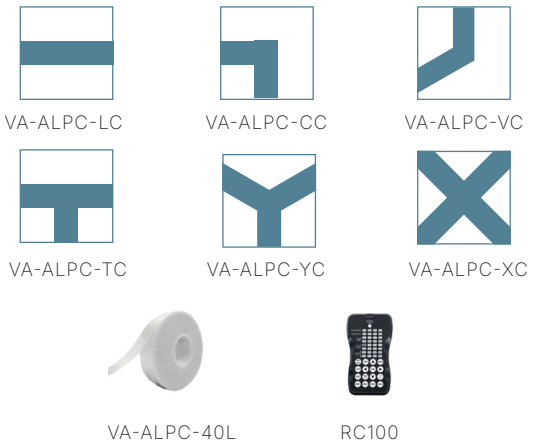

MOUNTING OPTIONS

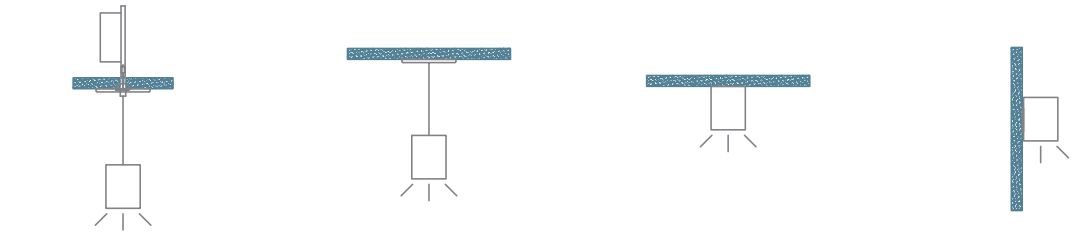

2.4" ALPC SERIES
CONTRACTOR LINEAR

VALRIYA
SPEC GRADE COMMERCIAL LED LIGHTING

CUSTOM SHAPES

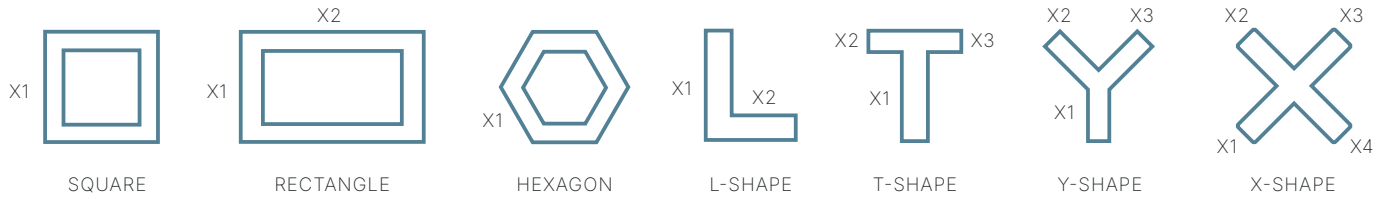

CUSTOM SHAPE ORDERING

Example: VA-ALPC-R-2-4

VA-ALPC [ ] [ ]

SHAPE

[S] Square
[R] Rectangle
[H] Hexagon
[L] L-Shape
[T] T-Shape
[Y] Y-Shape
[X] X-Shape

LENGTHS

[X-X] X = 2ft, 4ft, or 8ft (X1 - X2 - X3 - X4)
See dimensional illustrations above

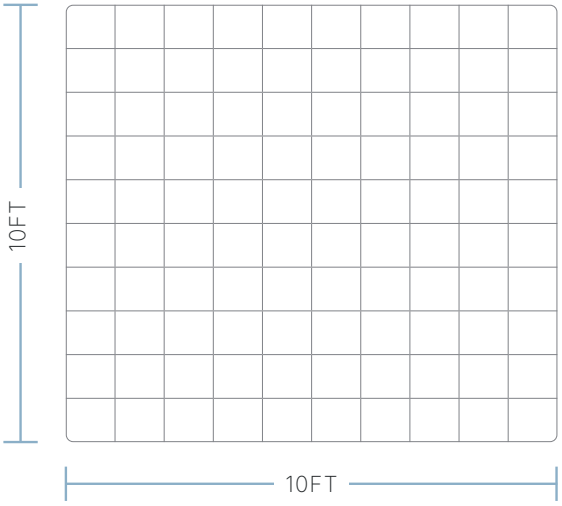

For custom shapes and designs please contact us

ADJUSTABLE LIGHT DISTRIBUTION

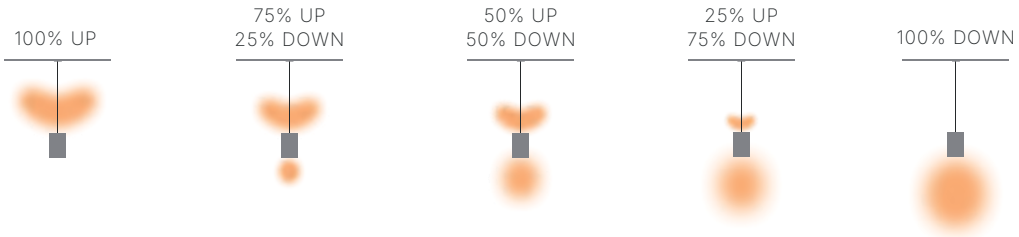

2.4" ALPC SERIES
CONTRACTOR LINEAR

VALRIYA
SPEC GRADE COMMERCIAL LED LIGHTING

PHOTOMETRICS

4FT / 40W / 4000K / 50% UP 50% DOWN

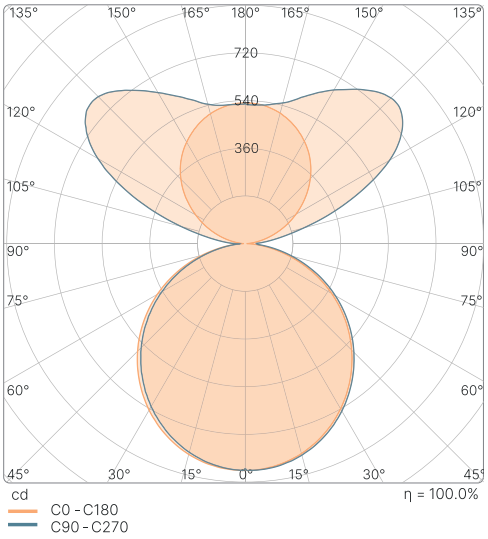
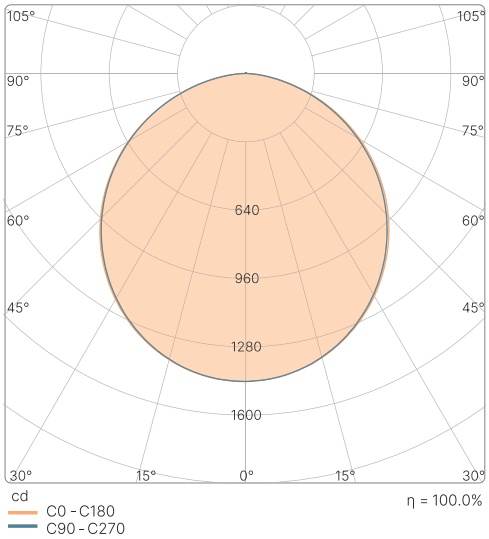
4FT / 40W / 4000K / 100% DOWN