

CLIENT
PROJECT
NOTES

WA SERIES

LOW PROFILE WRAPAROUND

The WA Series features a low profile, sleek design that can be surface mounted or suspended. Ideal for warehouse, industrial, commercial, and municipal applications.


- Available in 2ft and 4ft lengths
- High efficiency 130lm/w fixture
- Optional integrated EM driver and motion sensor available
- ETL, NOM, DLC® Standard



TECHNICAL DETAILS

POWER 2FT	40W
POWER 4FT	40W, 60W
COLOR TEMPERATURE	3000K, 3500K, 4000K, 5000K
CRI	80+ CRI
VOLTAGE	120-277VAC
EFFICIENCY	Up to 130lm/w
DIMMING	0-10V
LUMENS	Up to 7,800lm
HOUSING	Cold Rolled Steel
MOUNTING	Surface, Suspension
OPERATING TEMPERATURE	14°F to 104°F
WARRANTY	5 Years
FINISH	White
LOCATION	Damp
CERTIFICATIONS	ETL, NOM, DLC® Standard

DIMENSIONS

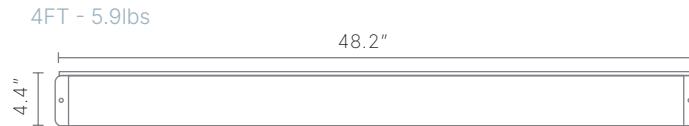

LUMENS 5000K

2FT	40W	5,200lm
	60W	7,800lm
4FT	40W	5,200lm
	60W	7,800lm

L70: 50,000+ HOURS

WA SERIES

LOW PROFILE WRAPAROUND

VALRIYA
SPEC GRADE COMMERCIAL LED LIGHTING

ORDERING GUIDE

Example: VA-WA-44-40-35-E

VA-WA	—	—	—	—
SIZE / POWER		CCT	OPTIONS	
[24-40] 2ft 40W		[30] 3000K ¹	[E] 8W EM Driver, CEC Listed ²	
[44-40] 4ft 40W		[35] 3500K ¹	[S] Occup. Sensor	
[44-60] 4ft 60W		[40] 4000K	[ES] EM + Sensor	
		[50] 5000K		

¹ Not DLC® Listed ² Consult factory for other EM options

ACCESSORIES*

SKU	DESCRIPTION
MC077V RC	Wireless Occupancy Sensor
MH10	Wireless Remote (MC077V RC)
VA-CSK	Chain Suspension Kit (4ft)
VA-EDM-LP08-058	8W Emergency Driver

*Items must be ordered separately

PHOTOMETRICS 4FT / 40W / 5000K

