

CLIENT

PROJECT

NOTES



WES SERIES

WET EXIT LIGHT

The WES Series is an ultra bright, compact unit, providing affordability in a high-end package. Featuring long life LEDs and a NiCad battery for energy efficiency.


- UL 924, NEC, NFPA 101 Life Safety Code
- Wet location listed
- Top, side, and wall mount installation
- 5VA flame retardant, UV stabilized polycarbonate enclosure
- Maintenance free NiCad battery



TECHNICAL DETAILS

BACKUP BATTERY	NiCad
VOLTAGE	120VAC / 277VAC
WEIGHT	10lbs.
MOUNTING	Top, Side, Wall
REMOTE HEAD	ERH Series & ORH Series
OPERATING TEMPERATURE	32°F to 104°F
WARRANTY	1 Year
LOCATION	Wet
CERTIFICATIONS	UL 924, NEC, NFPA101

DIMENSIONS

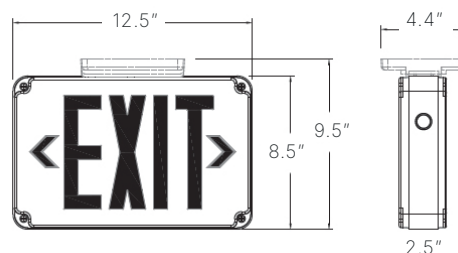

ORDERING GUIDE

VA-WES	<input type="text"/>	<input type="text" value="W"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
	LETTER COLOR	HOUSING	SIDES	OPERATION	OPTIONS
	[R] Red [G] Green	[W] White	[S] Single [D] Double	[BB] Battery Backup [AC] AC only [RH] Remote Head Capable [ST] Self Testing	[CW] Cold Weather

Example: VA-WES-R-W-S-BB

EMERGENCY OPERATION

Upon failure of the normal utility power, an internal solidstate transfer switch automatically provides uninterrupted emergency operation for at least 90 minutes. The fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

BATTERY BACKUP

The WES Series is designed with a maintenance-free NiCad battery that provides a minimum emergency duration of 90 minutes. Recharge time of the battery is 24 hours. The battery is protected by a low voltage cutoff circuit.