

CLIENT
PROJECT
NOTES



WES-U SERIES

ADJUSTABLE WET EXIT LIGHT

The WES-U Series is an ultra bright, compact unit, providing affordability in a high-end package. Featuring long life LEDs for energy efficiency.


- UL 924, NEC, NFPA 70, NFPA 101 Life Safety Code
- Wet location listed
- Top, side, and wall mount installation
- 5VA flame retardant, UV stabilized polycarbonate enclosure



TECHNICAL DETAILS

BACKUP BATTERY	3.2V 400mAh
VOLTAGE	120-277VAC
WEIGHT	10lbs.
MOUNTING	Top, Side, Wall
REMOTE HEAD	ERH Series & ORH Series
OPERATING TEMPERATURE	41°F to 122°F
WARRANTY	1 Year
LOCATION	Wet
CERTIFICATIONS	UL 924, NEC, NFPA70, NFPA101

DIMENSIONS

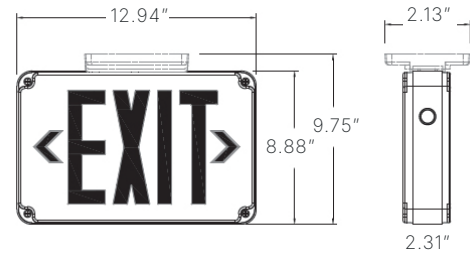

ORDERING GUIDE

VA-WES	U	W		
	LETTER COLOR	HOUSING	OPERATION	OPTIONS
	[U] Red / Green	[W] White	[BB] Battery Backup + Self Testing [AC] AC only	[CW] Cold Weather

Example: VA-WES-U-W-BB

EMERGENCY OPERATION

Upon failure of the normal utility power, an internal solid-state transfer switch automatically provides uninterrupted emergency operation for at least 90 minutes. The fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

BATTERY BACKUP

The WES-U Series is equipped with a 3.2V 400mAh battery for the battery backup and self-testing models, providing a minimum emergency duration of 90 minutes. The cold weather option includes a 3.2V 600mAh battery for improved performance in low-temperature environments.