

VALRIYA

SPEC GRADE COMMERCIAL LED LIGHTING

XD SERIES EMERGENCY LIGHT

The XD Series is a contemporary, low-profile architectural emergency light. Featuring a durable die-cast aluminum housing and fully damp and wet location listed.

- UL 924, NFPA70, NFPA101, NEC700.16, OSHA
- Damp and wet location listed
- 6000K color temperature
- Optional cold-weather package: -22°F to 122°F
- Charge rate / power on indicator
- UL94-5VA flame rating on polycarbonate

FEATURES

BACKUP BATTERY	NiCad 4.8V
VOLTAGE	120-277V
WEIGHT	6lbs.
MOUNTING	Wall, Ceiling
OPERATING TEMP	32°F to 104°F, -22°F to 122°F
WARRANTY	1 Year
LOCATION	Damp, Wet
CERTIFICATIONS	UL 924, NFPA70 & 101, NEC700.16, OSHA


CLIENT

PROJECT

NOTES



DIMENSIONS

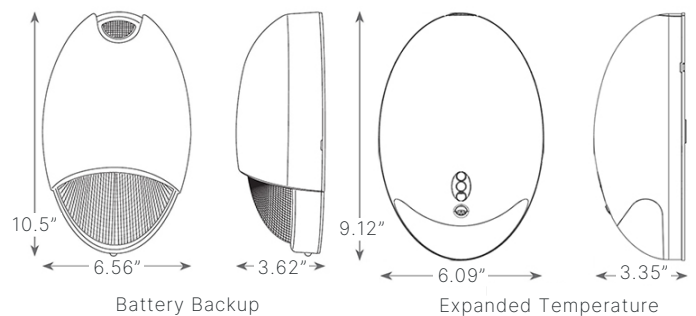

ORDERING GUIDE

VA-XD	<input type="text"/>	<input type="text"/>
	HOUSING	OPTIONS
	[DB] Dark Bronze [W] White [B] Black	[CW] Cold-weather (Expanded temperature)

Example: VA-XD-DB

ELECTRICAL COMPONENTS

120/277VAC dual primary 60Hz operation. Standard unit includes G2 self test/diagnostics. Offers field-selectable wiring that allows for AC operation of unit to be controlled using a wall-switch, photocell, or other switching mechanism (switch mechanism not included).

BATTERY BACKUP

The XD Series offers a long life maintenance-free 4.8V NiCad battery. Internal solid-state transfer switch automatically connects the internal battery to LED board for a minimum 90 minute emergency operation.